

SIL-AIR 100/24

 100 l/min - 3.53 CFM

 8 bar - 116 psi

Modello carrellato con 2 motori
Trolley-mounted model with two motors
Modèle sur chariot avec 2 moteurs
Fahrbares Modell mit 2 Verdichtern
Modelo con ruedas y 2 motores

SIL-AIR 100/24 V

Modello con ventole di raffreddamento

Model with cooling fans

Modèle avec ventilateurs de refroidissement

Modell mit Kühlventilatoren


Modelo con ventiladores de enfriamiento



						
Volt/Hz	l/min (CFM)	l (Gal.)	Watt	dBA	Kg (Lbs)	Kg (Lbs)
230/50	74 (2.6)	24 (6.34)	680	42	48 (106)	54 (119)
115/60	88 (3.1)		800			

* = @ 5 bar (70 PSI)

	A mm	B mm	C mm
	360	650	550
	370	800	610

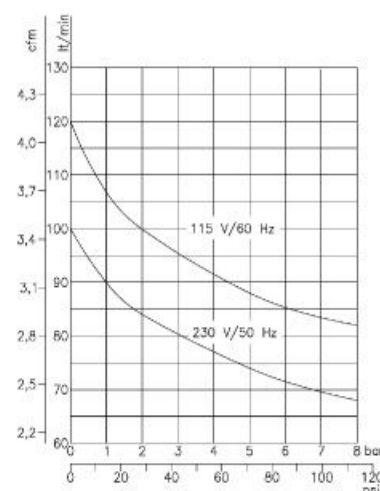

OPZIONI / OPTIONALS / OPTIONS / SONDERZUBEHÖR / OPCIONES



SIL-AIR 100/24 AL

Motori con coperchi alettati
Motors with cooling heads
Moteurs avec couvercles à ailettes
Motoren mit Kühlrippen
Motores con cabezas aletadas