

INSULATING LETTER-BOX SLOT

FOR METAL-, PVC-U AND WOODEN DOORS



COLOURS AND LOOKS



EV1
Natur



EV1
Natural
Aluminium



Medium
Bronze



"Stainless"



RAL
1247



EV2
Champagne



RAL
3003




EV3 Guld
Mat



RAL
3005



EV3 Guld
Shiny

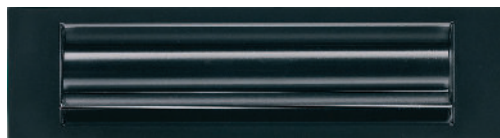

RAL
9005



EV6



RAL
9001



Amber 30



RAL
9010




Dark
Bronze




RAL
9016


SPECIFICATIONS



A - Front section
B - Slot dimensions
C - Milled front section



310 x 80 mm
236 x 30 mm
300 x 70 mm



400 x 80 mm
325 x 30 mm
389 x 70 mm

EV1 anodized

Housing and spacing frame black
Housing and spacing frame white

T60110000
T601B0000

T60210000
T602B0000

EV2 Champagne

Housing and spacing frame black

T60182000

T60282000

EV3

Housing and spacing frame black "matt"

T60183100

T60283100

EV3

Housing and spacing frame black "blank"

T60183200

T60283200

EV6

Housing and spacing frame black

T60186000

T60286000

Anodized "Stainless steel"

Housing and spacing frame black
Housing and spacing frame white

T60184000
T601C4000

T60284000
T602C4000

Amber 30

Housing and spacing frame black

T60180003

T60280003

Medium bronze

Housing and spacing frame black

T60180004

T60280004

Dark bronze anodized

Housing and spacing frame black

T60130000

T60230000

RAL colours

RAL9005 Housing and spacing frame black
RAL9010 Housing and spacing frame black
RAL9016 Housing and spacing frame white

T60110005
T601E0000
T601G0000

T60210005
T602E0000
T602G0000

Special colour powder coated

Housing and spacing frame white
Housing and spacing frame black

T601J0000
T60190000

T602J0000
T60290000

Special colour anodized


Housing and spacing frame white
Housing and spacing frame black

T601i0000
T60180000

T602i0000
T60280000

Standard RAL colours are: RAL 9001, RAL 9005, RAL 9010 and RAL 9016.

We have also the possibility to deliver letterbox slots in other colours. Please contact us to discuss your wishes!

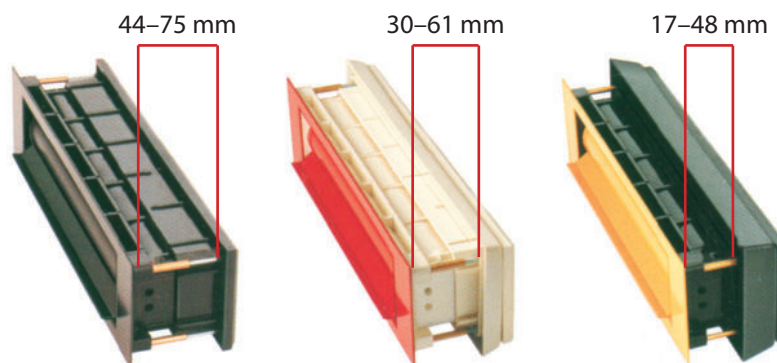

Door-leaf thickness 44–75 mm:

No Spacing frame needed

Door-leaf thickness 30–61 mm:

Spacing frame F14 needed

Door-leaf thickness 17–48 mm:

Spacing frame F27 needed

F14 white

F14 black

F27 white

F27 black

T650A0000

T650A0001

T650A0002

T650A0003

T650A0004

T650A0005

T650A0006



T650A0007

INSULATING LETTER-BOX SLOT

FOR METAL-, PVC-U AND WOODEN DOORS

Function principle

- The key feature of the WD Letter-box Slot is a rotating cylindrical section with a slot.
- The cylinder consists of two quarter-circular hollow-aluminium sections on plastic.
- 2 stainless steel restoring springs automatically return the cylinder to its closed position after use, thus creating a sealed air-chamber for first-class thermal insulation
- As the box unit is made largely of plastic, its resistance to cold is high.

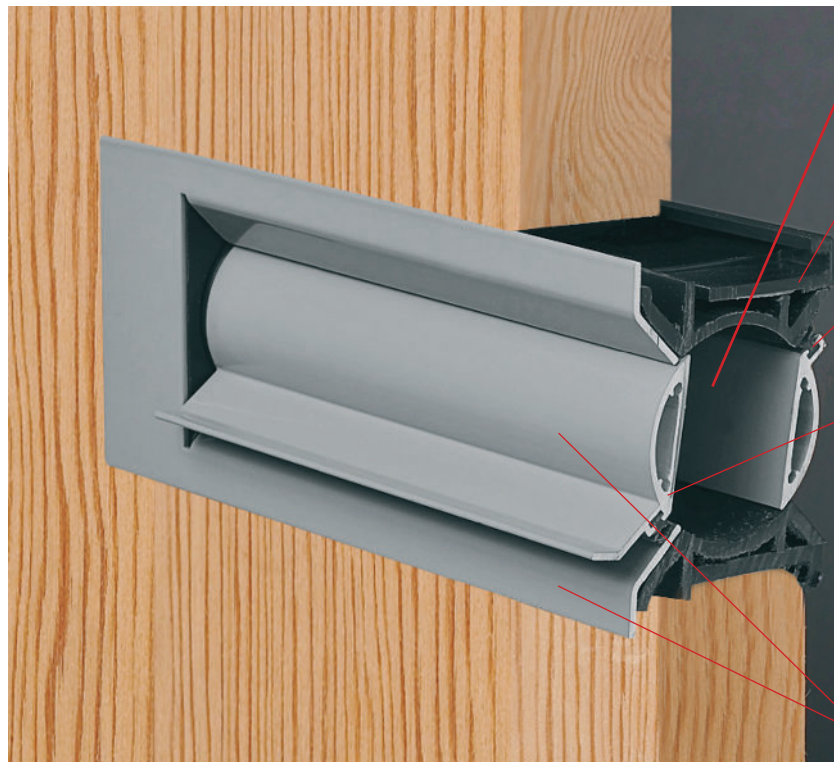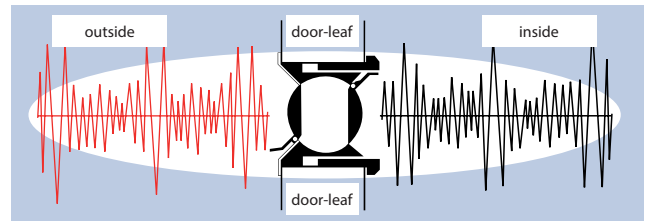

Rotating unit against draughts and dust. Self-closing.

Telescopic housing for door-blade thickness from 17 - 75 mm.
(Use spacing frame for door-blades below 44 mm thickness).

Silicon sealing strip prevents draughts and reduces noise.

When the slot is closed, the cylinder becomes a sealed air-chamber providing excellent thermal insulation.



PVC bearings hold the two quartercircular aluminium sections in position and insulate them.

Front section and rotating unit, made of aluminium.

Rotating cylindrical unit with insulating air-cushion protects against loss of warmth

Every penetration of a door's surface reduces its insulatory value. The WD Letter-Box Slot has a precision rotating open-sided hollow cylinder, which, when closed, forms a sealed air chamber. This provides an exceptionally effective barrier between the colder air outside and the warmer air within the building. This means:

- closed air-chamber (insulating air-cushion avoids loss of warmth).
- no air circulation (dust-proof).
- no draughts.
- noise reduction.

