

Fitting for top-running wooden doors up to 100 kg (220 lbs.), with surface mounted running track or running track flush with the ceiling. Optionally with soft and self closing mechanism. Ceiling mounting. Minimal installation height.

Product highlights



Flexibility

Ceiling-integrated or surface-mounted installation with the same system



Productivity

Tool-less door mounting

Technical specifications



Max. 100 kg (220 lbs.)



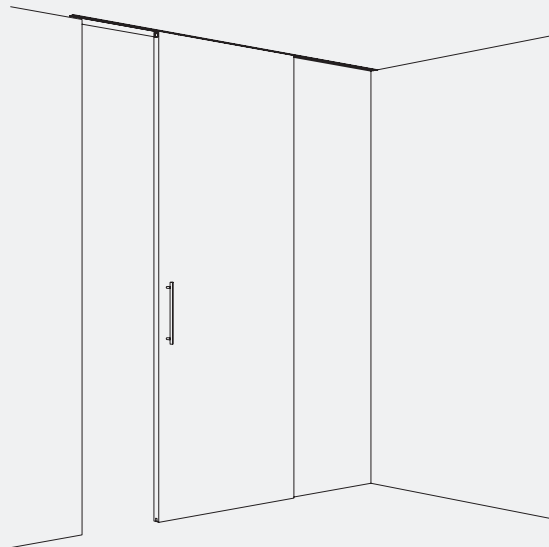
Max. 2700 mm (8'10 5/16")



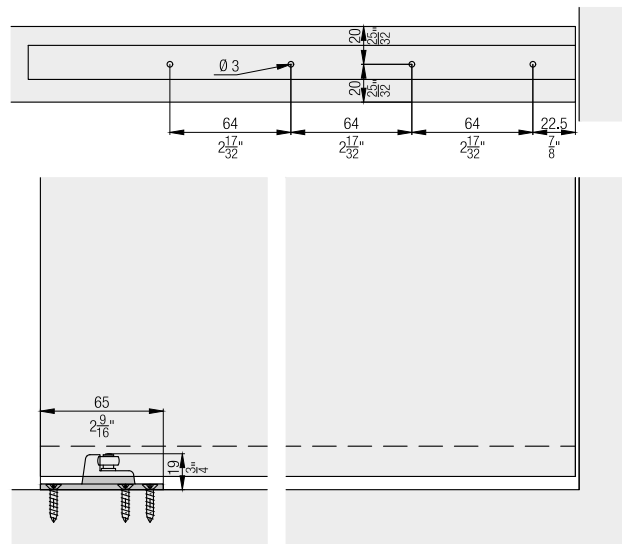
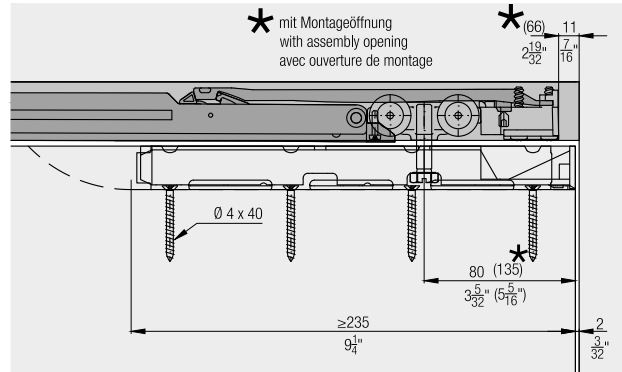
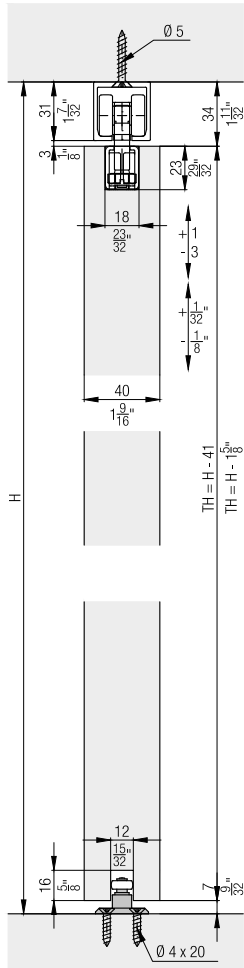
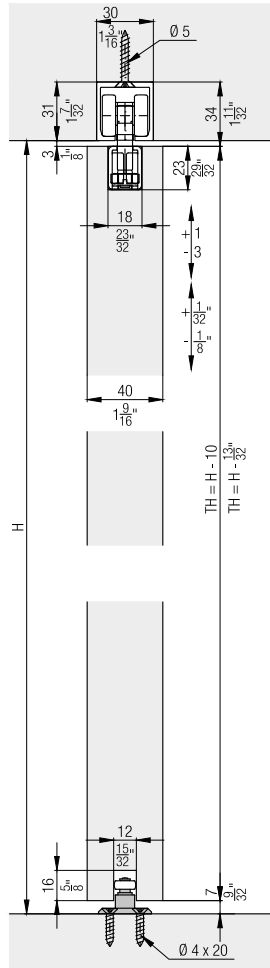
Max. 1600 mm (5'3")



30–80 mm (1 3/16" to 3 5/32")






Installation examples






**Set for ceiling mounting,
for 1 wooden door up to 100 kg (220 lbs.)**

	No.
Hawa Porta 100 HM/HMD and Hawa Divido 100 HM, minimal installation height, for 1 door	057.3133.071


		057.3133.071	No.
Set consisting of:			
	Running gear, ball bearing, rollers plastic white	2	057.3114.071
	Stopper, with retention spring, plastic, gray	2	057.3073.072
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated	2	042.0165.101
	Cover cap, plastic, grey	2	600.0000.533
	Running gear holder, plastic, anthracite	2	042.0167.001
	Housing, steel, zinc-plated	2	042.0166.101
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated	8	766.5040.140
	Bottom guide, with roller, adjustable, plastic, anthracite	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4	766.5042.120

**Set for ceiling mounting,
for 1 wooden door up to 100 kg (220 lbs.)**

	No.
Hawa Porta 100 HM, minimal installation height, with running track, 2000 mm, aluminum, anodized, for 1 door	057.3135.071

		mm (inch)	057.3135.071	No.
Set consisting of:				
	Running gear, ball bearing, rollers plastic white	2	057.3114.071	
	Stopper, with retention spring, plastic, gray	2	057.3073.072	
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated	2	042.0165.101	
	Cover cap, plastic, grey	2	600.0000.533	
	Running gear holder, plastic, anthracite	2	042.0167.001	
	Housing, steel, zinc-plated	2	042.0166.101	
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated	8	766.5040.140	
	Bottom guide, with roller, adjustable, plastic, anthracite	1	057.3120.071	
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4	766.5042.120	
	Track cleaner, plastic, blue	1	057.3099.071	
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1	057.3016.201


Running tracks

		mm (inch)	No.
	Running track, aluminum, pre-drilled	1,700 (5' 6 15/16")	057.3016.170
		2,000 (6' 6 3/4 ")	057.3016.200
		2,500 (8' 2 7/16")	057.3016.250
		6,000 (19' 8 7/32")	057.3016.600
		cut to size	057.3016.990
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.201
		2,500 (8' 2 7/16")	057.3016.251
		6,000 (19' 8 7/32")	057.3016.601
		cut to size	057.3016.991
	Running track, with assembly opening, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	057.3016.256
		cut to size	057.3016.998
	Running track, ceiling integration, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	27668
		3,500 (11' 5 25/32")	27667
		6,000 (19' 8 7/32")	30326
		cut to size	27669
	Disposable cover to running track Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990

Soft close


For soft closing in opening and closing direction
order 2 sets.

	No.
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133–220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22–132 lbs.), 1 piece	042.3102.072

		042.3102.071	042.3102.072	No.
Set consisting of:				
	Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1		042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
	Screw set soft close	1	1	600.0000.566
	Soft close, top running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3106.072

Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071


		042.3114.071	No.
Set consisting of:			
	Cover cap assembly opening, plastic, gray	1	042.0172.001
	Screw set soft close	1	600.0000.566

Screw set

	No.
Screw set for ceiling integration, +15 mm (+19/32")	057.3180.071

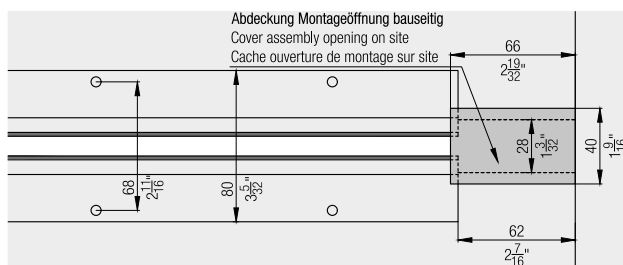
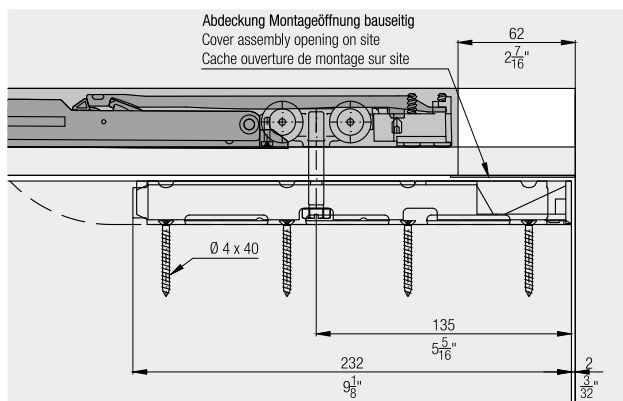
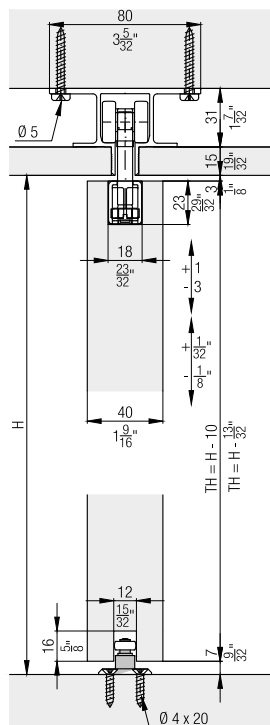
	057.3180.071	No.
Set consisting of:		
	Hexagon screw, M8x51 mm (5/16"x2"), steel, zinc-plated	2 042.0165.103
	Head cap screw, M8x50 mm (5/16"x1 31/32"), steel, zinc-plated	1 042.0175.002

Accessories

	No.
	Routing jig for assembly opening 042.3118.071
	Groove cutter to routing jig, Ø= 10 mm (13/32\"), hard metal 600.0000.309
	Track cleaner, plastic, blue 057.3099.071

Ceiling integration

Recommendation: For systems integrated into the ceiling, provide assembly openings or front access to the system.



Soft close

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 60/100 HM/HMD/HMT	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 100 G/GU/GM/GMT	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 100 GF	1' 6 29/32"			2' 4 3/4"		
Hawa Porta 100 GW/GWF	1' 8 5/32"	1' 9 11/32"	1' 11 1/4"	2' 6"	2' 6 29/32"	2' 7 3/16"
Hawa Porta 100 GMD	1' 7 7/32"	1' 9 7/32"	1' 11 1/4"	2' 5 1/16"	2' 7 1/16"	2' 7 3/16"
Hawa Divido 100 H/HM/GR	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Divido 100 GRM	1' 8 5/32"	1' 10 11/32"	1' 12 1/4"	2' 6"	2' 8 5/32"	2' 10 11/32"