


Tip KONT

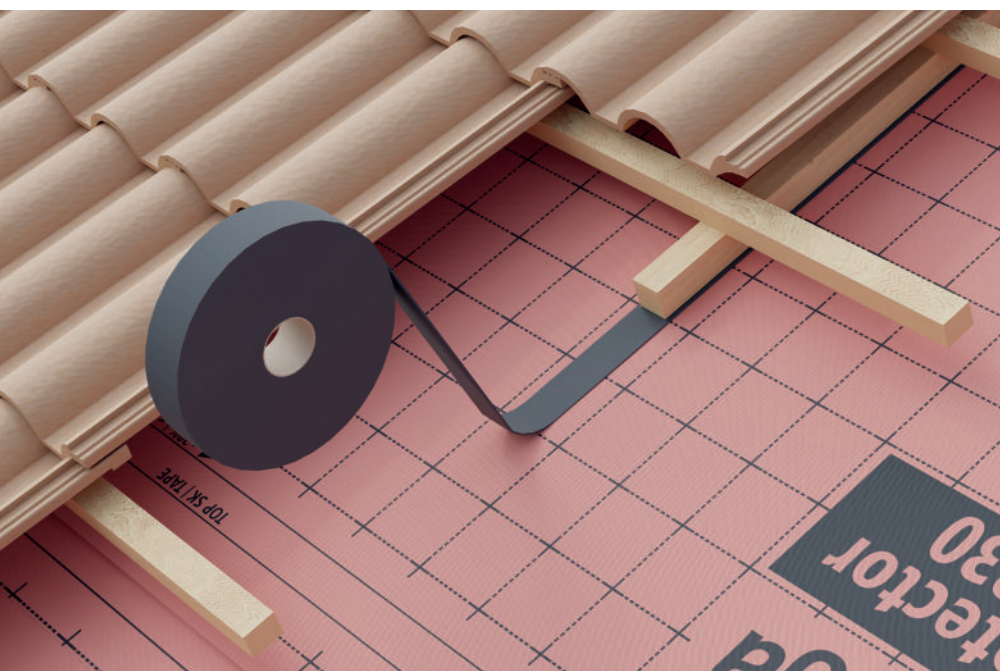

QUICK OVERVIEW: STRENGTHS


The continuous nail sealing tape

- Single-sided adhesive nail sealing tape
- Guarantees air-, wind- and water tightness of the breathable membranes
- Thanks to its high elasticity it is resistant to dilations and vibrations
- Wall and roof application

Features:



Classification:

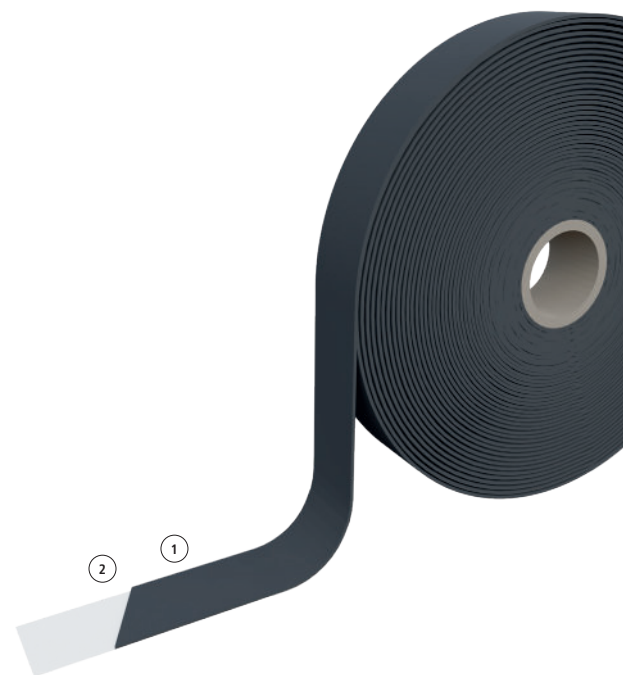

Composition:

- PE foam ①
Acrylic glue ②

Technical data sheet

Material		PE foam
Glue		acrylic
Protection liner		NO
Thickness		3 mm
Specific weight		25 / 30 kg/m ³
Peel adhesion	DIN EN 1939	≥5 N/25 mm
Shear strength	DIN EN 1943	500 g/625mm ²
Working temperature		+10°C / +30°C
Temperature resistance		-30°C / +80°C
Resistance to condensation		high
Resistance to aging		limited
UV stability		limited
Storage place		dry, protected from UV rays
Storage period		max. 24 months

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tip KONT 60	02045001	60x30	10	18
Tip KONT 70	020450017	70x30	9	18
Tip KONT 80	02045003	80x30	7	18