


USB Classic Light

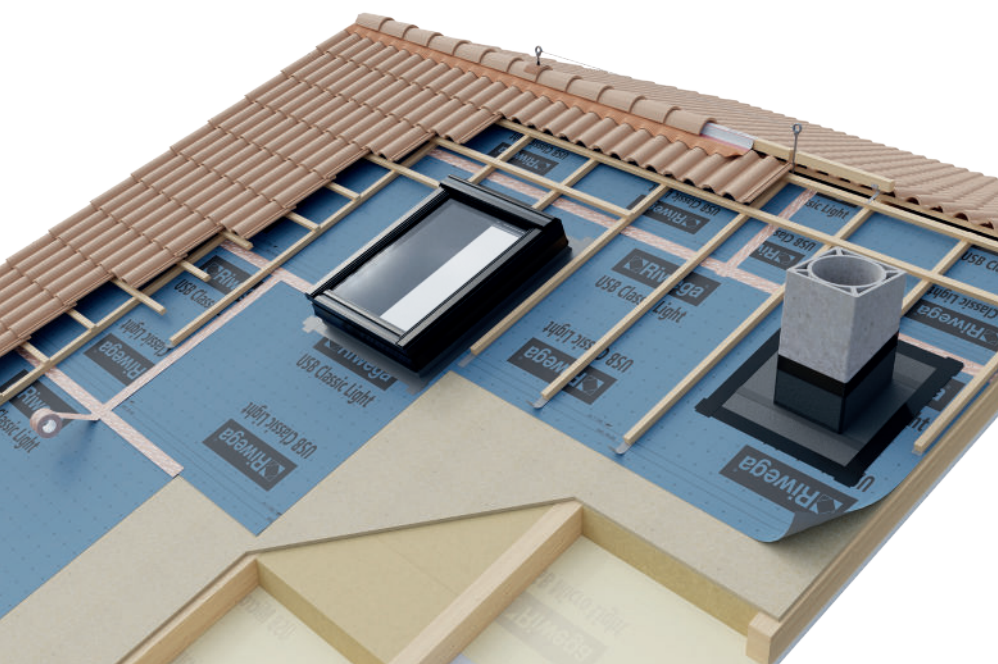

QUICK OVERVIEW: STRENGTHS


The lightest for the roof, the most resistant for the wall

- Highly breathable, water-tight membrane
- Optimised performance, guaranteed for 15 years thanks to the UV10 Bikom film
- Ideal for wind-tightness of ventilated facades with closed joints
- Recommended for roofs with a roof pitch over 30%
- Non-slip and non-reflective surface

Features:



Classification:

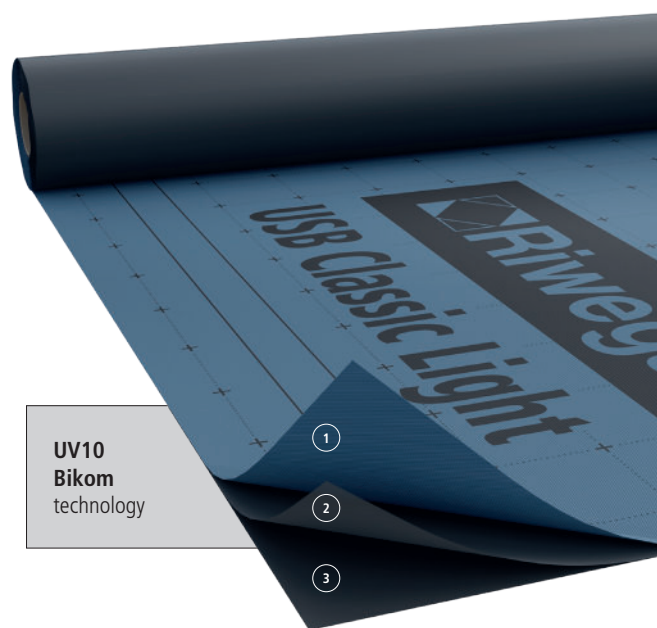

**UV10
Bikom
technology**

Composition:

- Protective UV stabilized, water repellent layer in PP ①
- Film UV10 Bikom, monolithic, elastic ②
- Protective layer in PP ③

Codes and measures

Code	Code TOP SK	Width (m)**	Length (m)	Pallet (m²)
02010140	020201501	1,5	50	1500

Technical data sheet

Material	PP-composite	
Film	UV10 Bikom	
Colour	Light blue	
Use underneath PV panels	NO	
Mass per unit area	EN 1849-2	155 g/m²
Thickness		0,75 mm
Sd value	EN ISO 12572	0,07 m
Water vapour permeability	EN ISO 12572	~ 500 g/m²/24 h
Watern column	EN 20811	>400 cm
Heavy rain test	TU Berlin	passed
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	290 / 225 N/50mm
Elongation MD/CD*	EN 12311-1	65 / 90 %
Tear resistance MD/CD*	EN 12310-1	170 / 200 N
Fire reaction class	EN 13501-1	E
UV stability		6 months
Temperature resistance		-40°/+100°C

*MD = longitudinal CD = transversal

**3 m version upon request

Riwega Srl is not responsible for negligent and improper use of its products