

Tape 1 PE


01

R3

QUICK OVERVIEW: STRENGTHS

Single-sided acrylic tape

- The extreme flexibility makes it easily adaptable to any laying situation
- Next-generation acrylic glue, high adhesion, solvent-free
- Dual use, internal and exterior, thanks to the waterproof surface
- Particularly resistant to UV rays and ageing

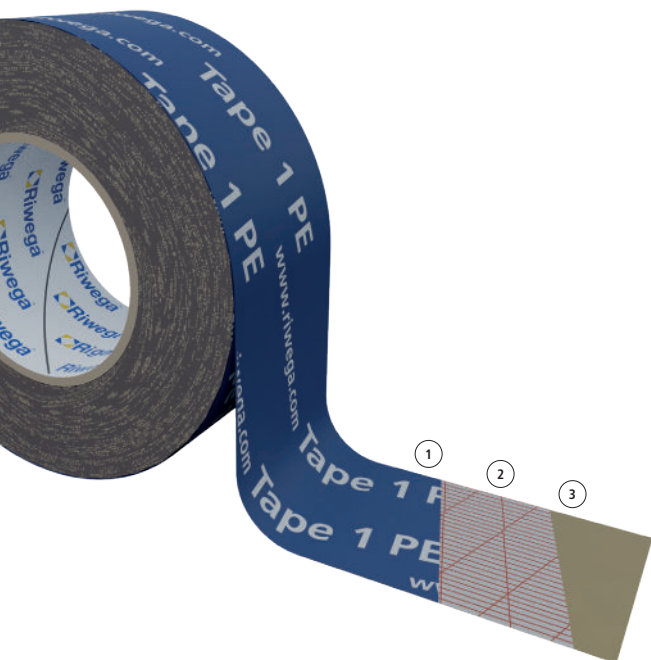

Composition:

- 1 Polyethylene
- 2 Acrylic glue with PET reinforcing
- 3 Silicone liner

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tape 1 PE	02040160	60x25	10	80
Tape 1 PE 100 X	02040193	100x25	6	80
Tape 1 PE 150	02040194	150x25	4	80

Features:



Classification:



Technical data sheet

Glue		polyacrylate-based disp.
Glue carrier material		LDPE film
Reinforcing mesh		YES
Protection liner		YES
Solvents and emollients		NO
Thickness	DIN EN 1942	0,27 - 0,29 mm
Sd value		~12 m
Tear resistance with elasticity	DIN EN 14410	≥25 N/25 mm; 300 %
Bond strength	DIN 4108-11	compliant
Resistance to condensation		very high
Resistance to aging		very high
Initial adhesion (Tack)		very high
Emissions	EMICODE®	EC1 ^{PLUS}
Working temperature		+5°C / +30°C lavorabile from -10°C
Temperature resistance		-30°C / +100°C
UV stability		24 months*
Storage place		dry, protected from UV rays, +18°C / +25°C
Storage period		max. 24 months

*with reference to the Central European climate
Riwega Srl is not responsible for negligent and improper use of its products