

Fitting for top-running glass doors up to 100 kg (220 lbs.), with surface mounted running track or running track flush with the ceiling. Optionally with soft and self closing mechanism. Ceiling mounting. Minimal installation height. Wall pocket solution.

Product highlights



Comfort

Soft sliding into pocket with efficient movement support thanks to Push-to-open with self closing mechanism



Productivity

Door can be installed in pocket after construction is complete



Productivity

No glass processing thanks to clamping shoe connection

Technical specifications



Max. 100 kg (220 lbs.)




Max. 2700 mm (8' 10 5/16")








Max. 1600 mm (5' 3")



8–12.7 mm (5/16" to 1/2")

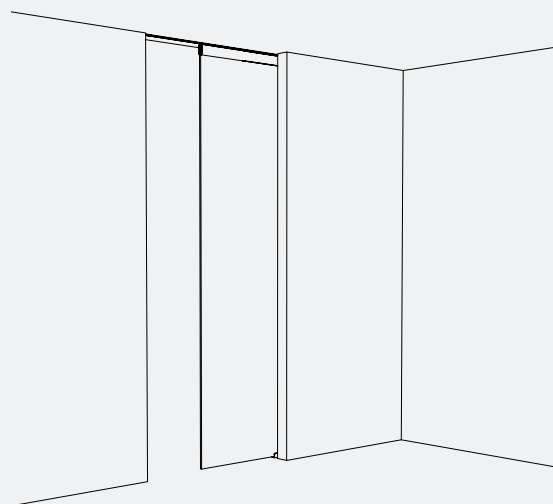

Installation examples

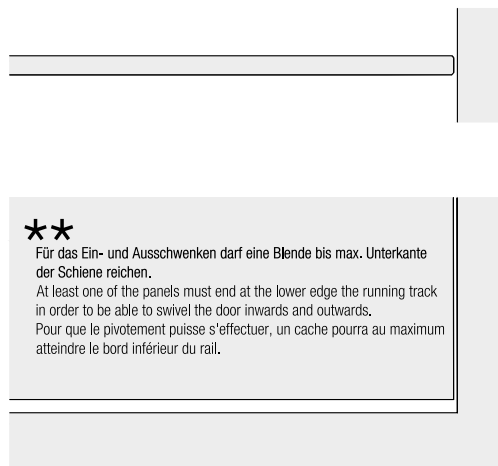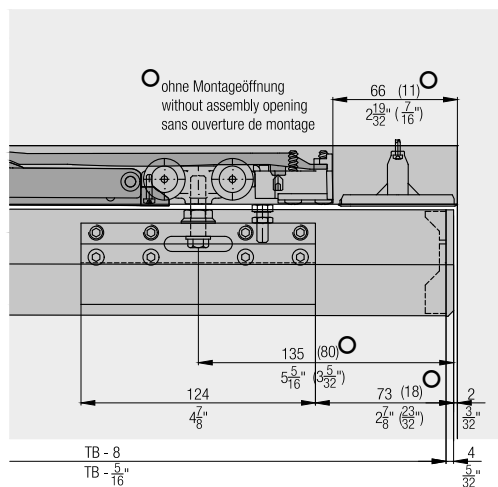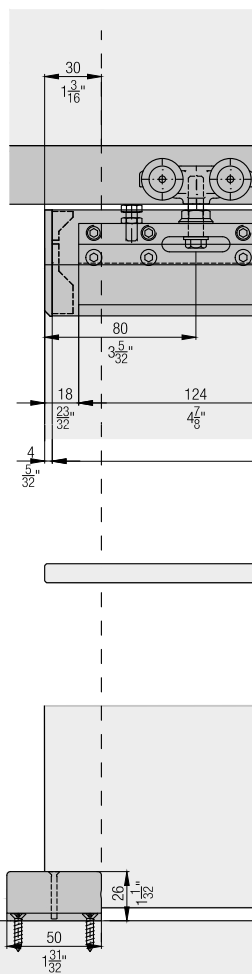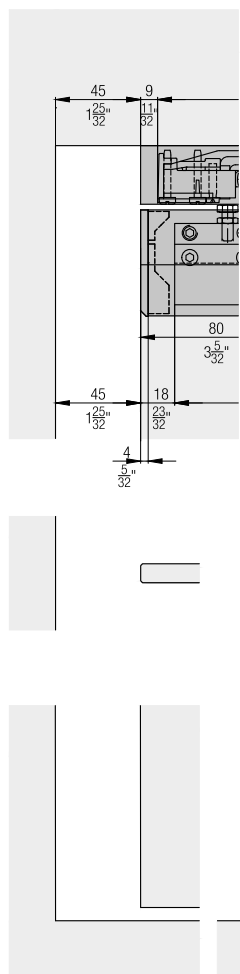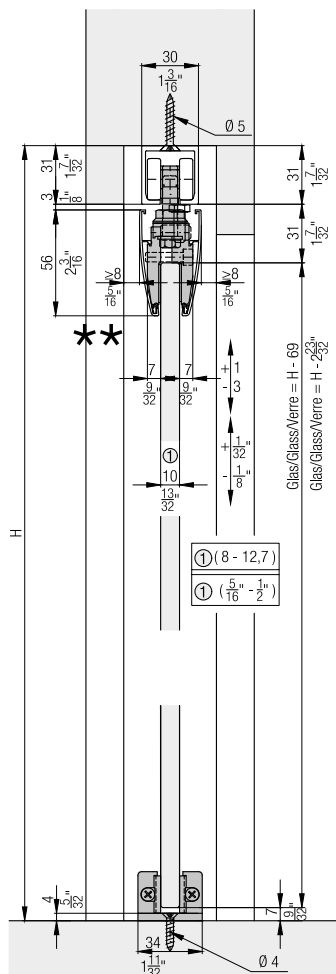

**Set for ceiling mounting,
for 1 glass door up to 100 kg (220 lbs.)**

	No.
Hawa Porta 100 GMT, for 1 door	057.3184.071

Set consisting of:

		057.3184.071	No.
	Running gear, ball bearing, rollers, plastic, white	2	057.3114.071
	Stopper, with retention spring, plastic, gray	1	057.3073.072
	Stopper, without retention spring, plastic, gray	1	057.3073.071
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	768.9005.101
	Clamping shoe, aluminum, glass thickness 8–12.7 mm (5/16" to 1/2")	2	057.3032.075
	Hexagon screw, M6x20 mm (1/4"x 25/32"), plastic, white	2	762.9480.000
	Hexagon jam nut, M6, steel, zinc-plated	2	768.2001.101
	Bottom guide, playfree adjustable, glass thickness 8–12.7 mm (5/16" to 1/2"), chrome-plated, mat	1	057.3082.071
	Wall buffer, 19x10 mm (3/4"x13/32"), rubber, black	1	024.0002.046
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	3	766.5042.120



**Set for ceiling mounting,
for 1 glass door up to 100 kg (220 lbs.)**

	No.
Hawa Porta 100 GMT, with Push-to-open, with running track, 2000 mm (6' 6 3/4"), aluminum, anodized, for 1 door	057.3184.072
Hawa Porta 100 GMT, with Push-to-open, with running track, 2500 mm (8' 2 7/16"), aluminum, anodized, for 1 door	057.3184.073



	mm (inch)	057.3184.072	057.3184.073	No.
	Running gear, ball bearing, rollers, plastic, white	2	2	057.3114.071
	Stopper, without retention spring, plastic, gray	2	2	057.3073.071
	Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1	1	042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
	Push-to-open Hawa Porta 100, 40–100 kg (88 to 220 lbs.), with self-closing	1	1	057.3177.071
	Release piece for Push-to-open, zinc die casting	1	1	057.3176.001
	Screw set soft close	2	2	600.0000.566
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	2	768.9005.101
	Clamping shoe, aluminum, glass thickness 8–12.7 mm (5/16" to 1/2")	2	2	057.3032.075
	Hexagon screw, M6x20 mm (1/4"x 25/32"), plastic, white	2	2	762.9480.000
	Hexagon jam nut, M6, steel, zinc-plated	2	2	768.2001.101

Continued table on next page


Table continued from previous page

	Bottom guide, playfree adjustable, glass thickness 8–12.7 mm (5/16" to 1/2"), chrome-plated, mat	1	1	057.3082.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	3	3	766.5042.120
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1	057.3174.200
	Assembly pin, plastic, gray	9	11	057.0201.001
	Countersunk head screw, 5x40 mm (3/16"x1 9/16"), steel, zinc-plated	10	12	766.3054.140
	End cap, left for panel, plastique, anthracite	2	2	057.3059.001
	End cap, right for panel, plastique, anthracite	2	2	057.3059.002
	End cap holder, plastic, anthracite	2	2	057.0141.001
	Clip to panel, plastic, gray	4	4	057.3060.001
	Head cap screw, M5x18 mm (3/16"x23/32"), steel, zinc-plated	8	8	600.0000.661
	Head cap screw, M5x20 mm (3/16"x25/32"), steel, zinc-plated	8	8	763.0508.120
	Clip-on panel, for clamping shoe, aluminum, anodized	1,500 (4' 11 1/16")	2	057.3039.150
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	1	057.3174.250

Running tracks

		mm (inch)	No.
	Running track, aluminum, pre-drilled	1,700 (5' 6 15/16")	057.3016.170
		2,000 (6' 6 3/4 ")	057.3016.200
		2,500 (8' 2 7/16")	057.3016.250
		6,000 (19' 8 7/32")	057.3016.600
		cut to size	057.3016.990
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.201
		2,500 (8' 2 7/16")	057.3016.251
		6,000 (19' 8 7/32")	057.3016.601
		cut to size	057.3016.991
	Running track, with assembly opening, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	057.3016.256
		cut to size	057.3016.998
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990


Assembly set

	No.
 Assembly set Hawa Porta 60/100, 2000 mm (6' 6 3/4")	057.3179.200
Assembly set Hawa Porta 60/100, 2500 mm (8' 2 7/16")	057.3179.250
Assembly set Hawa Porta 60/100, 3000 mm (9' 10 1/8")	057.3179.300

Set consisting of:

	mm (inch)	057.3179.200	057.3179.250	057.3179.300	No.
 Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4")	1			057.3174.200
 Assembly pin, plastic, gray		9	11	13	057.0201.001
 Countersunk head screw, 5x40 mm (3/16"x1 9/16"), steel, zinc-plated		10	12	14	766.3054.140
 Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")		1		057.3174.250
 Running track, aluminum, anodized, pre-drilled	3,000 (9' 10 1/8")			1	057.3174.300

Panels

	mm (inch)	No.
 Clip-on panel, for clamping shoe, aluminum, anodized	2,500 (8' 2 7/16")	057.3039.250
	6,000 (19' 8 7/32")	057.3039.600
	cut to size	057.3039.990


End cap set

	No.
End cap for panels	057.3061.072
	No.

Set consisting of:

	End cap, left for panel, plastique, anthracite	2	057.3059.001
	End cap, right for panel, plastique, anthracite	2	057.3059.002
	End cap holder, plastic, anthracite	2	057.0141.001
	Clip to panel, plastic, gray	4	057.3060.001
	Head cap screw, M5x18 mm (3/16"x23/32"), steel, zinc-plated	8	600.0000.661
	Head cap screw, M5x20 mm (3/16"x25/32"), steel, zinc-plated	8	763.0508.120

**Push-to-open with self closing mechanism
(must only be used with Hawa Porta 100)**

	No.
 Push-to-open Hawa Porta 100, 40-100 kg (88 to 220 lbs.), 1 piece	057.3178.071

Set consisting of:


	Push-to-open Hawa Porta 100, 40-100 kg (88 to 220 lbs.), with self-closing	1	057.3177.071
	Release piece for Push-to-open, zinc die casting	1	057.3176.001
	Screw set soft close	1	600.0000.566

Soft close
Sets for single- or both-sided steaming



	No.
Set of 2 soft close, Hawa Porta 100, Divido 100, 61–100 kg (133–220 lbs.)	52425
Set of 2 soft close, Hawa Porta 60/100, Divido 100, 10–60 kg (22–132 lbs.)	52426
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133–220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22–132 lbs.), 1 piece	042.3102.072

	52425	52426	042.3102.071	042.3102.072	No.
Set consisting of:					
	2		1		042.3106.071
	2	2	1	1	042.3105.001
	2	2	1	1	600.0000.566
		2		1	042.3106.072


Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071
Set consisting of:	
	1
	1


Accessories

	No.
	27760
	042.3118.071
	600.0000.309
	057.3099.071


Soft close

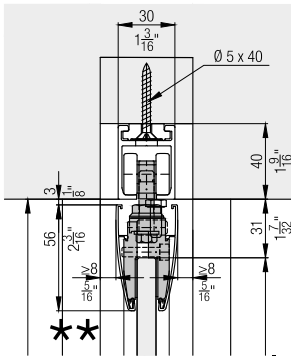


Track installation Pocket

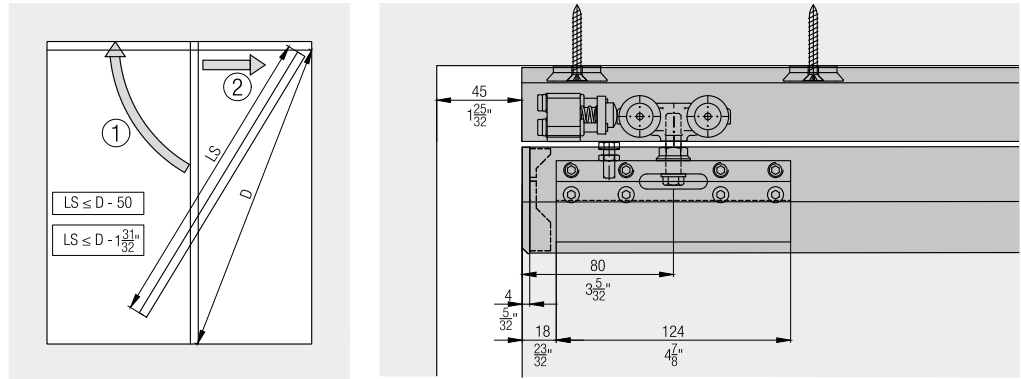

Ceiling integration

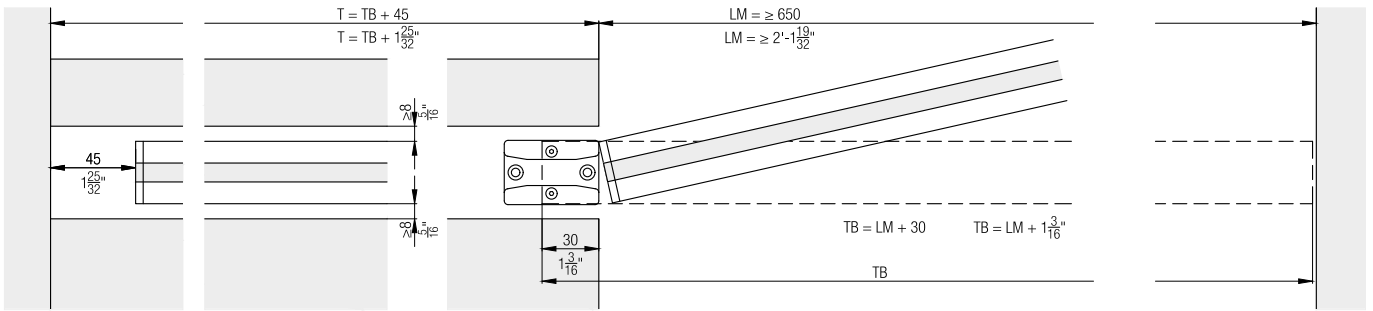


Bottom door stopper

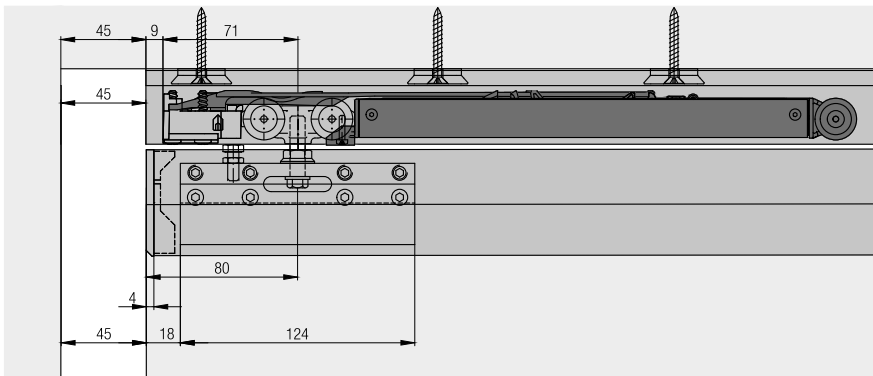


Türgewicht / door weight / poids de la porte 40-100 kg

Soft close

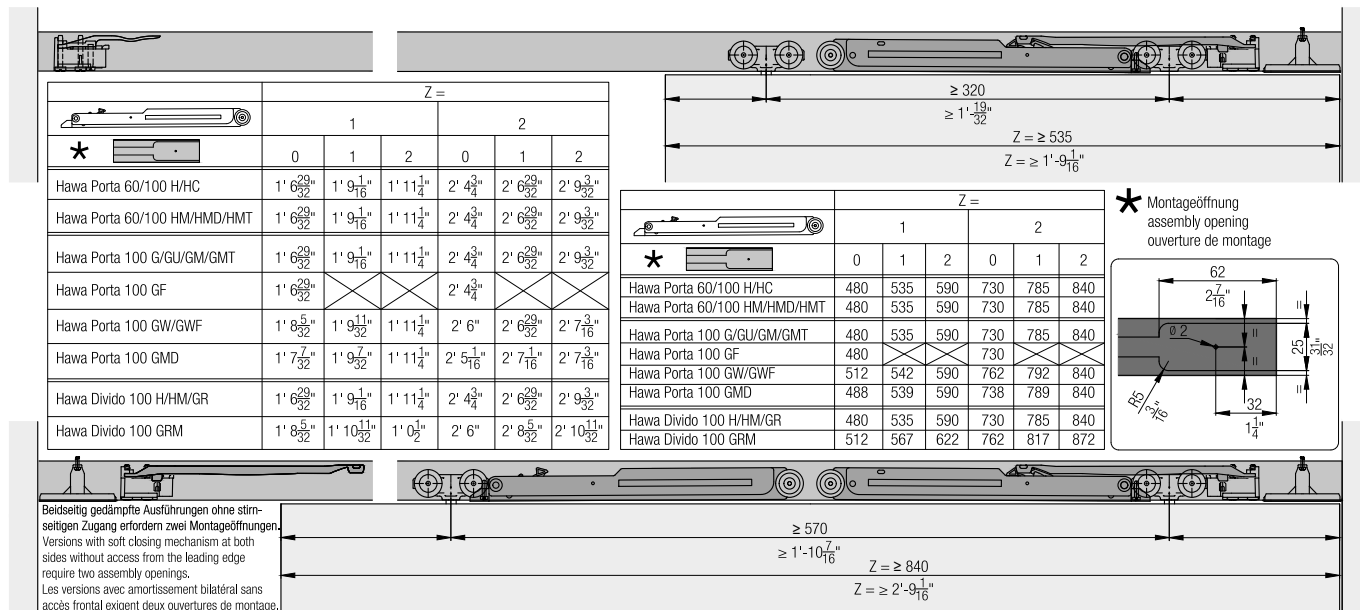

Push-to-open soft closing mechanism

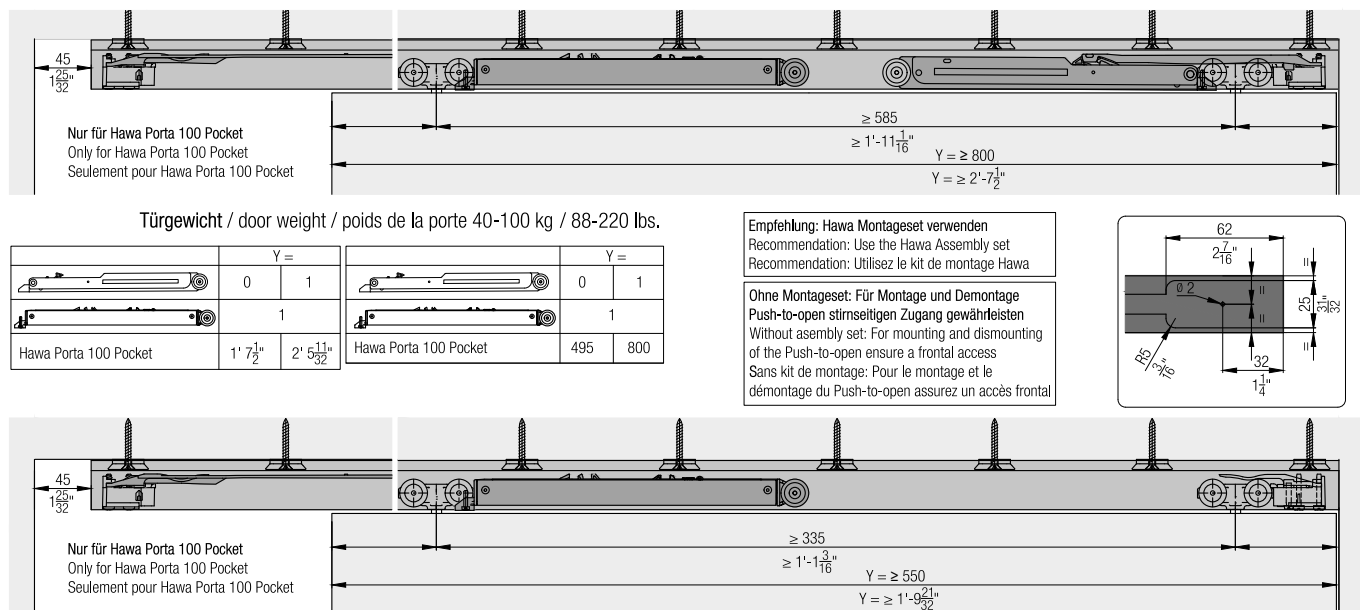

Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.