

Fitting for top-running glass doors up to 100 kg (220 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall or ceiling mounting. Minimal installation height.

Product highlights



Comfort

Smooth, quiet sliding and gentle stopping of the door with integrated soft and self closing system



Productivity

Efficient installation thanks to clamping shoe connection and clip panels



Aesthetics

Also available in black as a “Black Edition” design option for a particularly attractive appearance

Technical specifications



Max. 100 kg (220 lbs.)




Max. 2700 mm (8' 10 5/16")




Max. 1600 mm (5' 3")



8–12.7 mm (5/16" to 1/2")

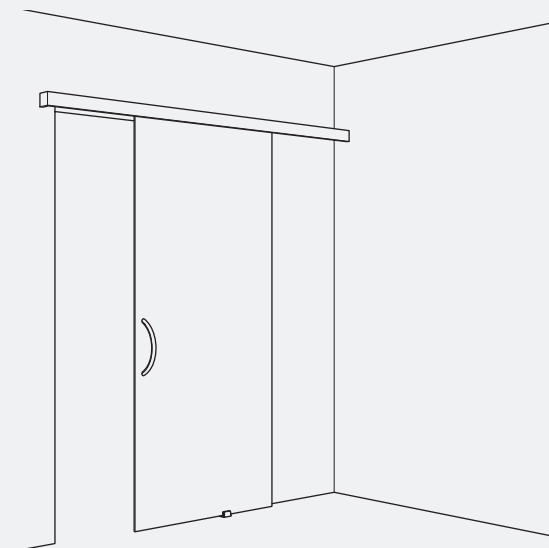

Installation examples

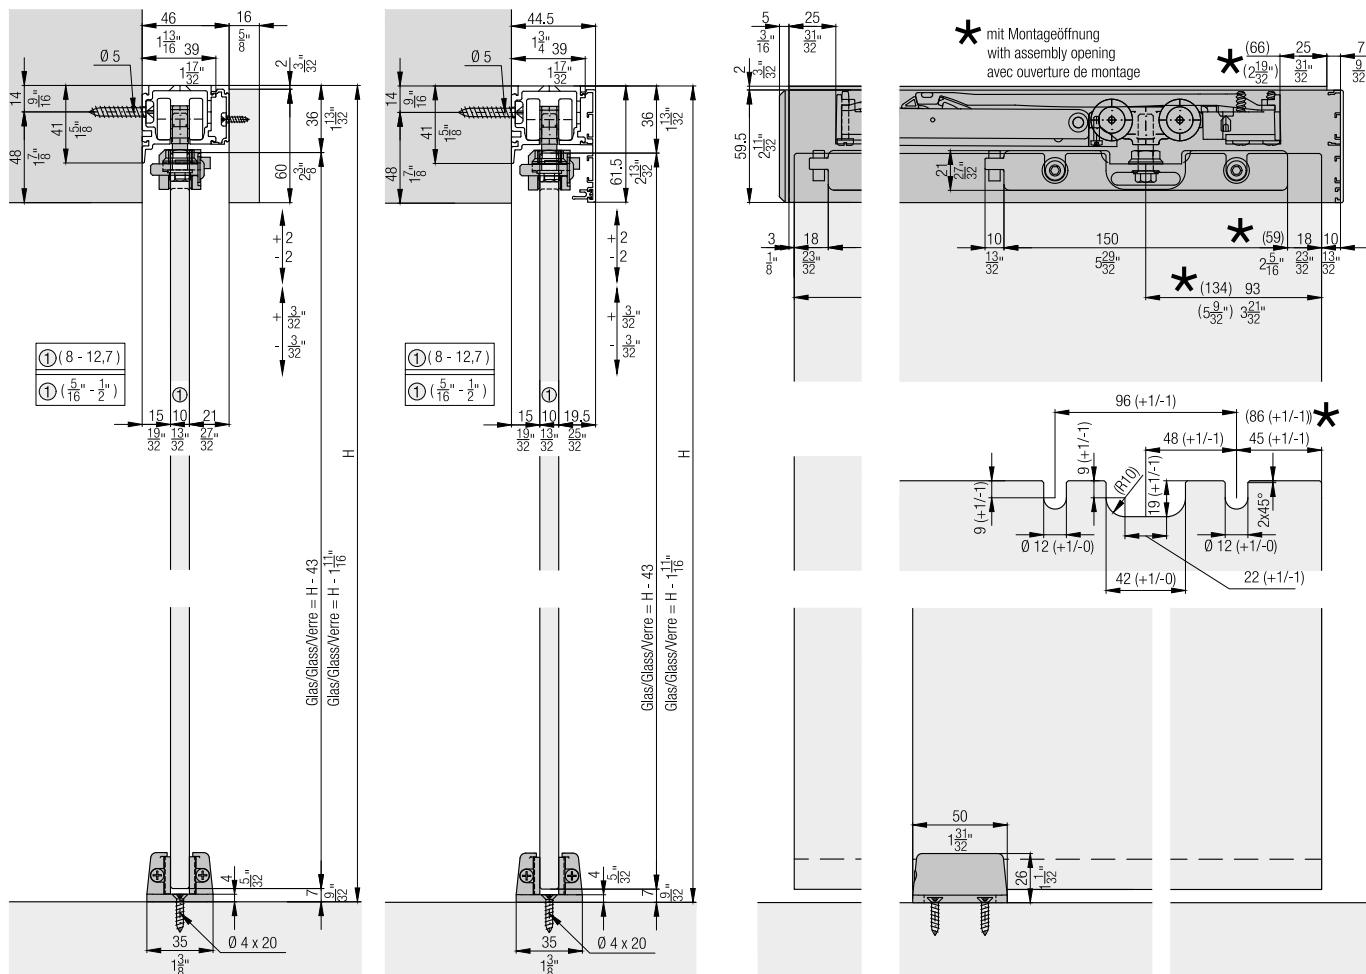

**Set for wall mounting,
for 1 glass door up to 100 kg (220 lbs.)**

	No.
Hawa Porta 100 GMD, for 1 door	057.3153.071
Hawa Porta 100 GMD, black, for 1 door	057.3153.075

Set consisting of:

		057.3153.071	057.3153.075	No.
	Running gear, ball bearing, rollers, plastic, white	2	2	057.3114.071
	Stopper, with retention spring, plastic, gray	1		057.3073.072
	Stopper, without retention spring, plastic, gray	1		057.3073.071
	Suspension bolt, M8x30 mm (5/16"x1 3/16"), steel, zinc-plated	2	2	057.0123.102
	Hexagon locking nut, M8, steel, zinc-plated	2	2	768.9005.101
	Clamping shoe, glass thickness 8-12.7 mm (5/16"-1/2"), steel, zinc-plated	2	2	057.3152.071
	Bottom guide, playfree adjustable, chrome-plated, matt	1		057.3030.071
	Wall buffer, 19x10 mm (3/4"x13/32"), rubber, black	1	1	024.0002.046
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	3		766.5042.120
	Stopper, with retention spring, plastic, black		1	057.3073.076
	Stopper, without retention spring, plastic, black		1	057.3073.075
	Bottom guide, adjustable play free, black		1	057.3030.075
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		3	600.0000.817


**Set for ceiling mounting,
for 1 glass door up to 100 kg (220 lbs.)**

	No.
Hawa Porta 100 GMD, with running track and panel, 1996 mm (6' 6 19/32"), aluminum, anodized, for 1 door	057.3155.071


Set consisting of:

		mm (inch)	057.3155.071	No.
	Running gear, ball bearing, rollers, plastic, white		2	057.3114.071
	Stopper, with retention spring, plastic, gray		1	057.3073.072
	Stopper, without retention spring, plastic, gray		1	057.3073.071
	Suspension bolt, M8x30 mm (5/16"x1 3/16"), steel, zinc-plated		2	057.0123.102
	Hexagon locking nut, M8, steel, zinc-plated		2	768.9005.101
	Clamping shoe, glass thickness 8-12.7 mm (5/16"-1/2"), steel, zinc-plated		2	057.3152.071
	Bottom guide, playfree adjustable, chrome-plated, matt		1	057.3030.071
	Wall buffer, 19x10 mm (3/4"x13/32"), rubber, black		1	024.0002.046
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		3	766.5042.120
	End cap set, plastic, anthracite		1	057.3154.071
	Track cleaner, plastic, blue		1	057.3099.071
	Combi running track, aluminum, pre-drilled	1,996 (6' 6 19/32")	1	057.3048.199
	Clip-on panel, aluminum, anodized	2,000 (6' 6 3/4")	1	042.3004.199

Running tracks

		mm (inch)	No.
	Combi running track, aluminum, pre-drilled	2,000 (6' 6 3/4 ")	057.3048.200
		2,500 (8' 2 7/16")	057.3048.250
		3,500 (11' 5 25/32")	057.3048.350
		6,000 (19' 8 7/32")	057.3048.600
		cut to size	057.3048.990
	Combi running track, aluminum, black anodized, pre-drilled	2,500 (8' 2 7/16")	057.3048.255
		3,500 (11' 5 25/32")	057.3048.355

Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2,500 (8' 2 7/16")	042.3004.250
		3,500 (11' 5 25/32")	042.3004.350
		6,000 (19' 8 7/32")	042.3004.600
		cut to size	042.3004.990
	Clip-on panel, aluminum, black anodized	2,500 (8' 2 7/16")	042.3004.255
		3,500 (11' 5 25/32")	042.3004.355
	Screening seal for fascias, plastic, black	20,000 (65' 7 13/32")	057.3078.002

Clip-on components

		No.
	Clip component for wooden and aluminum panel, every 500 mm (1' 7 11/16"), aluminium, pre-drilled	057.3117.001
	Clip component for wooden and aluminum panel, every 500 mm (1' 7 11/16"), aluminum, black anodized, pre-drilled	057.3117.005

Panel end component set, 44 mm (1 23/32"), aluminum

	No.
Panel end component set for wall mounting, 44x60 mm (1 23/32"x2 3/8"), aluminum, black anodized	042.3028.054
Panel end component set for wall mounting, 44x60 mm (1 23/32"x2 3/8"), aluminum, anodized	042.3028.074

		042.3028.054	042.3028.074	No.
Set consisting of:				
	Panel end component, 44 mm (1 23/32"), aluminum, black anodized	1		042.3028.954
	Bracker connector, steel, zinc-plated	2	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	4	011.0101.171
	Panel end component, 44 mm (1 23/32"), aluminum, anodized		1	042.3028.904

Panel end component set, 49 mm (1 15/16"), aluminum

	No.
Panel end component set for ceiling mounting, 49x60 mm (1 15/16"x2 3/8"), aluminum, black anodized	042.3028.051
Panel end component set for 057.3048., 49x60 mm (1 15/16"x2 3/8"), aluminum, anodized, for ceiling mounting	042.3028.071

		042.3028.051	042.3028.071	No.
Set consisting of:				
	Panel end component, 49 mm (1 15/16"), aluminum, black anodized	1		042.3028.951
	Bracker connector, steel, zinc-plated	2	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	4	011.0101.171
	Panel end component, 49 mm (1 15/16"), aluminum, anodized		1	042.3028.901

End cap set

		No.	
End cap set, plastic, anthracite		057.3154.071	
		057.3154.071	No.
Set consisting of:			
	End cap, left, 44 mm (1 23/32"), plastic, anthracite	1	057.3154.001
	End cap, right, 44 mm (1 23/32"), plastic, anthracite	1	057.3154.002

Soft close

Sets for single- or both-sided steaming

	No.
Set of 2 soft close, Hawa Porta 100, Divido 100, 61–100 kg (133–220 lbs.)	52425
Set of 2 soft close, Hawa Porta 60/100, Divido 100, 10–60 kg (22–132 lbs.)	52426
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133–220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22–132 lbs.), 1 piece	042.3102.072

	52425	52426	042.3102.071	042.3102.072	No.
Set consisting of:					
	2		1		042.3106.071
	2	2	1	1	042.3105.001
	2	2	1	1	600.0000.566
		2		1	042.3106.072

Cover for assembly opening

		No.	
Cover cap to assembly opening, 1-piece set		042.3114.071	
		042.3114.071	No.
Set consisting of:			
	Cover cap assembly opening, plastic, gray	1	042.0172.001
	Screw set soft close	1	600.0000.566

Bottom guide


Adjustable without play for wall mounting

	No.
	057.3015.175


Accessories

	No.
	20773
	042.3118.071
	600.0000.309
	057.3099.071


Ceiling mounting

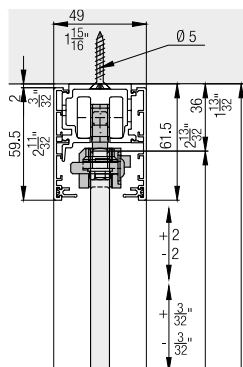



Bottom door stopper



Calculations of panels

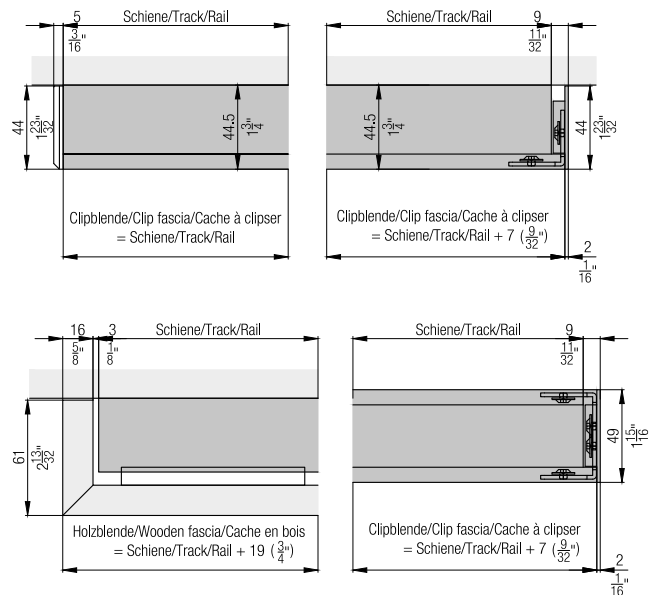

Wall mounting bottom guide



Soft close

Side View Dimensions:

- Top section: ≥ 320 , $\geq 1' \cdot \frac{19}{32}$, $Z \geq 535$, $Z \geq 1' \cdot 9 \frac{1}{16}"$
- Bottom section: ≥ 570 , $\geq 1' \cdot 10 \frac{7}{16}"$, $Z \geq 840$, $Z \geq 2' \cdot 9 \frac{1}{16}"$

Assembly Instructions:

★ Montageöffnung
assembly opening
ouverture de montage

Beidseitig gedämpfte Ausführungen ohne stirnseitigen Zugang erfordern zwei Montageöffnungen.
Versions with soft closing mechanism at both sides without access from the leading edge require two assembly openings.
Les versions avec amortissement bilatéral sans accès frontal exigent deux ouvertures de montage.

Table 1: Hawa Porta 60/100 H/H/C

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/H/C	1' $\frac{6 \frac{29}{32}}{32}$	1' $9 \frac{1}{16}$	1' $11 \frac{1}{4}$	2' $4 \frac{3}{4}$	2' $6 \frac{29}{32}$	2' $9 \frac{3}{32}$

Table 2: Hawa Porta 60/100 HM/HMD/HMT

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 HM/HMD/HMT	1' $\frac{6 \frac{29}{32}}{32}$	1' $9 \frac{1}{16}$	1' $11 \frac{1}{4}$	2' $4 \frac{3}{4}$	2' $6 \frac{29}{32}$	2' $9 \frac{3}{32}$

Table 3: Hawa Porta 100 G/GU/GM/GMT

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 100 G/GU/GM/GMT	1' $\frac{6 \frac{29}{32}}{32}$	1' $9 \frac{1}{16}$	1' $11 \frac{1}{4}$	2' $4 \frac{3}{4}$	2' $6 \frac{29}{32}$	2' $9 \frac{3}{32}$

Table 4: Hawa Porta 100 GF

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 100 GF	1' $\frac{6 \frac{29}{32}}{32}$	X	X	2' $4 \frac{3}{4}$	X	X

Table 5: Hawa Porta 100 GW/GWF

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 100 GW/GWF	1' $\frac{6 \frac{5}{32}}{32}$	1' $9 \frac{11}{32}$	1' $11 \frac{1}{4}$	2' $6"$	2' $\frac{6 \frac{29}{32}}{32}$	2' $7 \frac{3}{16}$

Table 6: Hawa Porta 100 GMD

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 100 GMD	1' $7 \frac{7}{32}$	1' $9 \frac{7}{32}$	1' $11 \frac{1}{4}$	2' $5 \frac{1}{16}$	2' $7 \frac{1}{16}$	2' $7 \frac{3}{16}$

Table 7: Hawa Divido 100 H/HM/GR

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Divido 100 H/HM/GR	1' $\frac{6 \frac{29}{32}}{32}$	1' $9 \frac{1}{16}$	1' $11 \frac{1}{4}$	2' $4 \frac{3}{4}$	2' $\frac{6 \frac{29}{32}}{32}$	2' $9 \frac{3}{32}$

Table 8: Hawa Divido 100 GRM

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Divido 100 GRM	1' $8 \frac{5}{32}$	1' $10 \frac{11}{32}$	1' $0 \frac{1}{2}$	2' $6"$	2' $8 \frac{3}{32}$	2' $10 \frac{11}{32}$

Detail View Dimensions:

- Top: 62, $2 \frac{1}{16}$
- Bottom: 32, $1 \frac{1}{4}$
- Right: 53, $1 \frac{5}{16}$
- Left: 15, $3 \frac{1}{16}$
- Center: $\emptyset 2$

Soft close

	Z =					
	1			2		
★ 	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 60/100 HM/HMD/HMT	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 100 G/GU/GM/GMT	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 100 GF	1' 6 29/32"			2' 4 3/4"		
Hawa Porta 100 GW/GWF	1' 8 5/32"	1' 9 11/32"	1' 11 1/4"	2' 6"	2' 6 29/32"	2' 7 7/16"
Hawa Porta 100 GMD	1' 7 7/32"	1' 9 5/32"	1' 11 1/4"	2' 5 1/16"	2' 7 1/16"	2' 7 7/16"
Hawa Divido 100 H/HM/GR	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Divido 100 GRM	1' 8 5/32"	1' 10 11/32"	1' 0 1/2"	2' 6"	2' 8 5/32"	2' 10 11/32"

	Z =					
	1			2		
★ 	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	480	535	590	730	785	840
Hawa Porta 60/100 HM/HMD/HMT	480	535	590	730	785	840
Hawa Porta 100 G/GU/GM/GMT	480	535	590	730	785	840
Hawa Porta 100 GF	480			730		
Hawa Porta 100 GW/GWF	512	542	590	762	792	840
Hawa Porta 100 GMD	488	539	590	738	789	840
Hawa Divido 100 H/HM/GR	480	535	590	730	785	840
Hawa Divido 100 GRM	512	567	622	762	817	872

★ Montageöffnung
assembly opening
ouverture de montage

Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.