

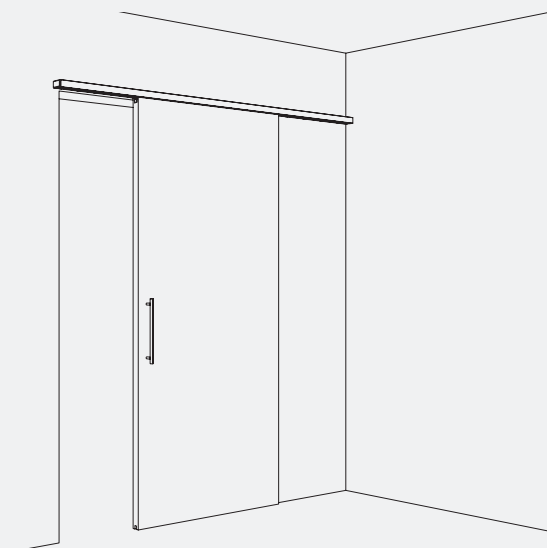
Fitting for top-running wooden doors up to 100 kg (220 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall mounting. Minimal installation height.

Product highlights

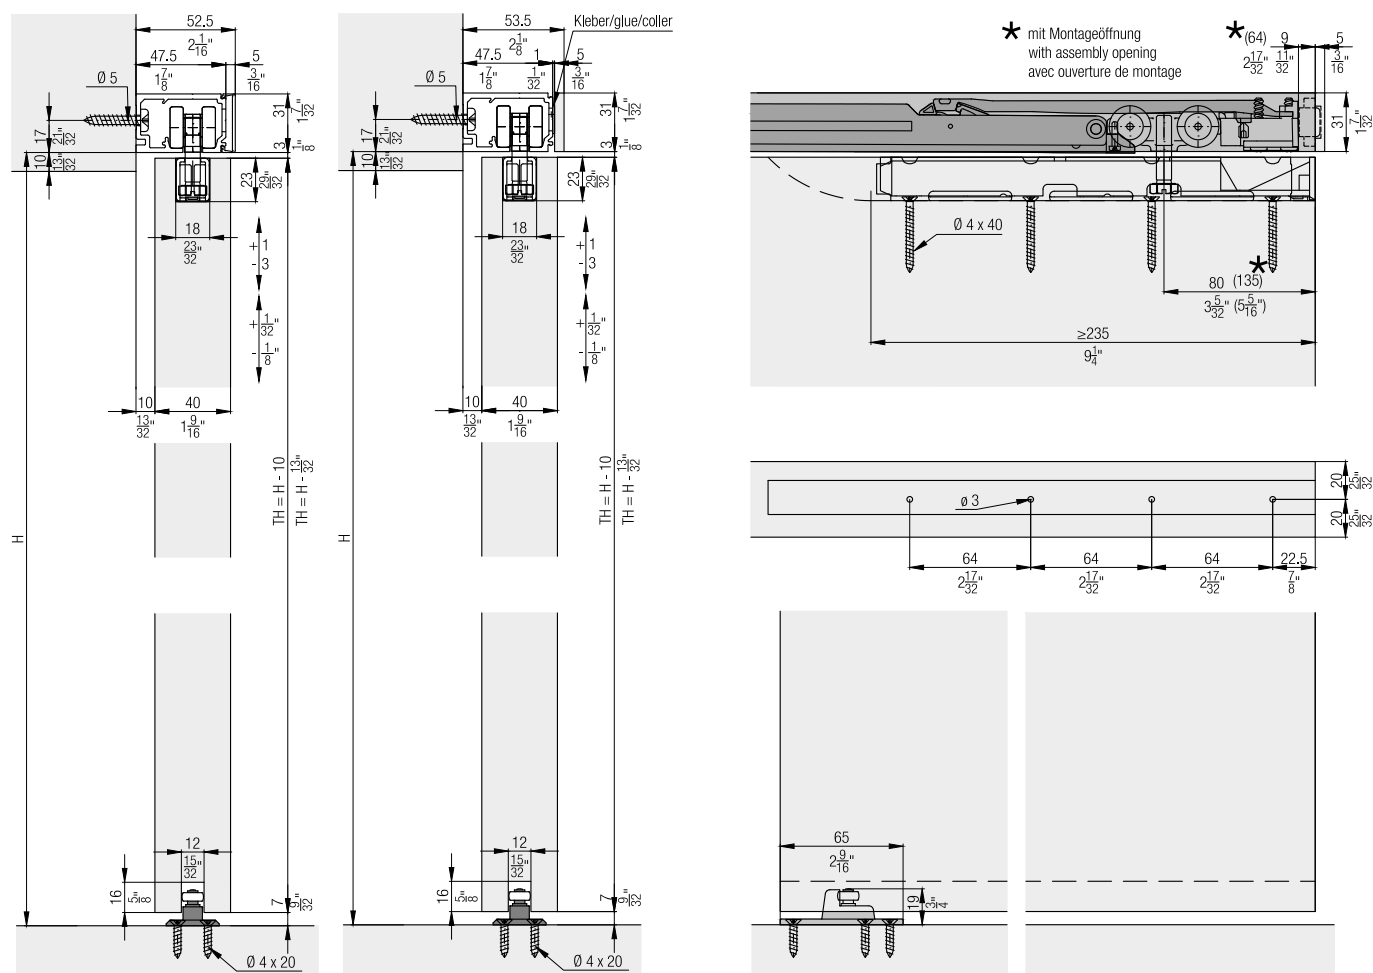
- Flexibility** Aluminium panel or customer-provided wooden panelling integrated in the system
- Productivity** Tool-less door mounting
- Aesthetics** Also available in black as a "Black Edition" design option for a particularly attractive appearance

Technical specifications

- Max. 100 kg (220 lbs.)
- Max. 2700 mm (8' 10 5/16")
- Max. 1600 mm (5' 3")
- 30–45 mm (1 3/16" to 1 25/32")





Installation examples









**Set for wall mounting,
for 1 wooden door up to 100 kg (220 lbs.)**

	No.
Hawa Porta 100 HM/HMD and Hawa Divido 100 HM, minimal installation height, for 1 door	057.3133.071
Hawa Porta 100 HMD, black, minimal installation height, for 1 door	057.3133.085

		057.3133.071	057.3133.085	No.
	Running gear, ball bearing, rollers, plastic, white	2	2	057.3114.071
	Stopper, with retention spring, plastic, gray	2		057.3073.072
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated	2	2	042.0165.101
	Cover cap, plastic, grey	2	2	600.0000.533
	Running gear holder, plastic, anthracite	2	2	042.0167.001
	Housing, steel, zinc-plated	2	2	042.0166.101
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated	8	8	766.5040.140
	Bottom guide, with roller, adjustable, plastic, anthracite	1	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4		766.5042.120
	Stopper, with retention spring, plastic, black		2	057.3073.076
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		4	600.0000.817




**Set for wall mounting,
for 1 wooden door up to 100 kg (220 lbs.)**

	No.
Hawa Porta 100 HMD, minimal installation height, with running track and panel, 1996 mm (6' 6 19/32"), aluminum, anodized, for 1 door	057.3137.071


		mm (inch)	057.3137.071	No.
	Running gear, ball bearing, rollers, plastic, white		2	057.3114.071
	Stopper, with retention spring, plastic, gray		2	057.3073.072
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated		2	042.0165.101
	Cover cap, plastic, grey		2	600.0000.533
	Running gear holder, plastic, anthracite		2	042.0167.001
	Housing, steel, zinc-plated		2	042.0166.101
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated		8	766.5040.140
	Bottom guide, with roller, adjustable, plastic, anthracite		1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		4	766.5042.120
	Fixation clip for wooden and aluminum panel, 2-piece set		1	057.3126.071
	End cap, plastic, anthracite		1	057.3131.071
	Track cleaner, plastic, blue		1	057.3099.071
	Single running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1	057.3112.199
	Clip-on panel, wall mounting, aluminum, anodized	2,000 (6' 6 3/4 ")	1	057.3113.199

Set consisting of:

Running tracks



		mm (inch)	No.
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	057.3112.250
		3,500 (11' 5 25/32")	057.3112.350
		6,000 (19' 8 7/32")	057.3112.600
		cut to size	057.3112.990
	Running track, aluminum, black anodized, pre-drilled	2,500 (8' 2 7/16")	057.3112.255
		3,500 (11' 5 25/32")	057.3112.355
	Running track, extended spacing of +9 mm (11/32") between door and wall, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	30617
		6,000 (19' 8 7/32")	30618
		cut to size	30668
	Running track, extended spacing of +20 mm (25/32") between door and wall, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	30619
		6,000 (19' 8 7/32")	30620
		cut to size	30669
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990

Panels

		mm (inch)	No.
	Clip-on panel, wall mounting, aluminum, anodized	2,500 (8' 2 7/16")	057.3113.250
		3,500 (11' 5 25/32")	057.3113.350
		6,000 (19' 8 7/32")	057.3113.600
		cut to size	057.3113.990
	Clip-on panel, wall mounting, aluminum, black anodized	2,500 (8' 2 7/16")	057.3113.255
		3,500 (11' 5 25/32")	057.3113.355

End cap set for running track 057.3112.xxx

	No.
End cap set, with fixation clip, plastic, anthracite	057.3131.072
End cap set, with fixation clip, plastic, black	057.3131.075

	057.3131.072	057.3131.075	No.
Set consisting of:			
 End cap, plastic, anthracite	1		057.3131.071
 Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	2	057.3126.101
 End cap set, plastic, black		1	057.3131.076


Fixing clamp for the end pieces of wooden or aluminum panels

	No.
Fixation clip for wooden and aluminum panel, 2-piece set	057.3126.071

	057.3126.071	No.
Set consisting of:		
 Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	057.3126.101

Panel end component set, 95 mm (3 3/4"), can be shortened, plastic, wall mounting

	No.
 Panel end component set, with fixation clip, 95 mm (3 3/4"), plastic, anthra- cite	30485

	30485	No.
Set consisting of:		
 Panel end component, 95 mm (3 3/4"), plastic, anthracite, can be shortened	2	30133
 Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	057.3126.101

Soft close

Sets for single- or both-sided steaming

	No.
Set of 2 soft close, Hawa Porta 100, Divido 100, 61–100 kg (133–220 lbs.)	52425
Set of 2 soft close, Hawa Porta 60/100, Divido 100, 10–60 kg (22–132 lbs.)	52426
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133–220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22–132 lbs.), 1 piece	042.3102.072


Set consisting of:

	52425	52426	042.3102.071	042.3102.072	No.
	2	1			042.3106.071
	2	2	1	1	042.3105.001
	2	2	1	1	600.0000.566
		2		1	042.3106.072

Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071



Set consisting of:

	042.3114.071	No.
	1	042.0172.001
	1	600.0000.566

Bottom guide set for wall mounting

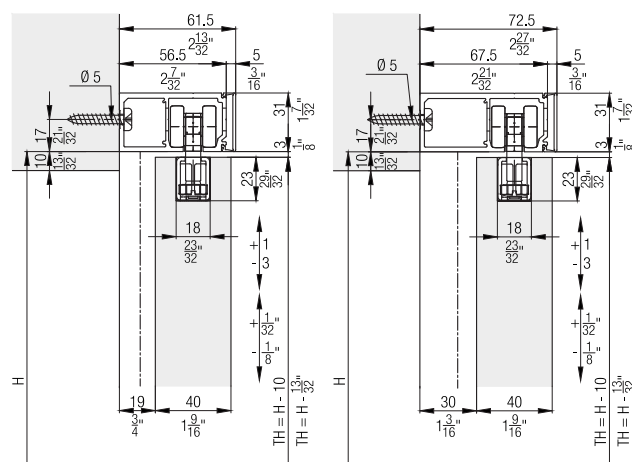
	No.
	057.3128.171

Accessories

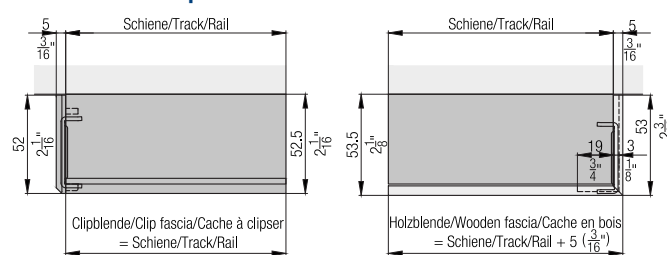
	No.
	042.3118.071
	600.0000.309
	057.3099.071

Further installation examples

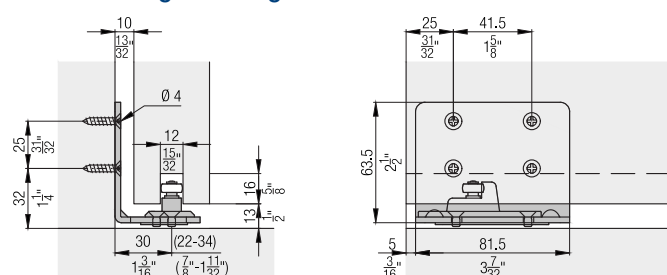
Wall mounting rails with extended spacing of +9 mm/+20 mm (11/32"/25/32") between door and wall.



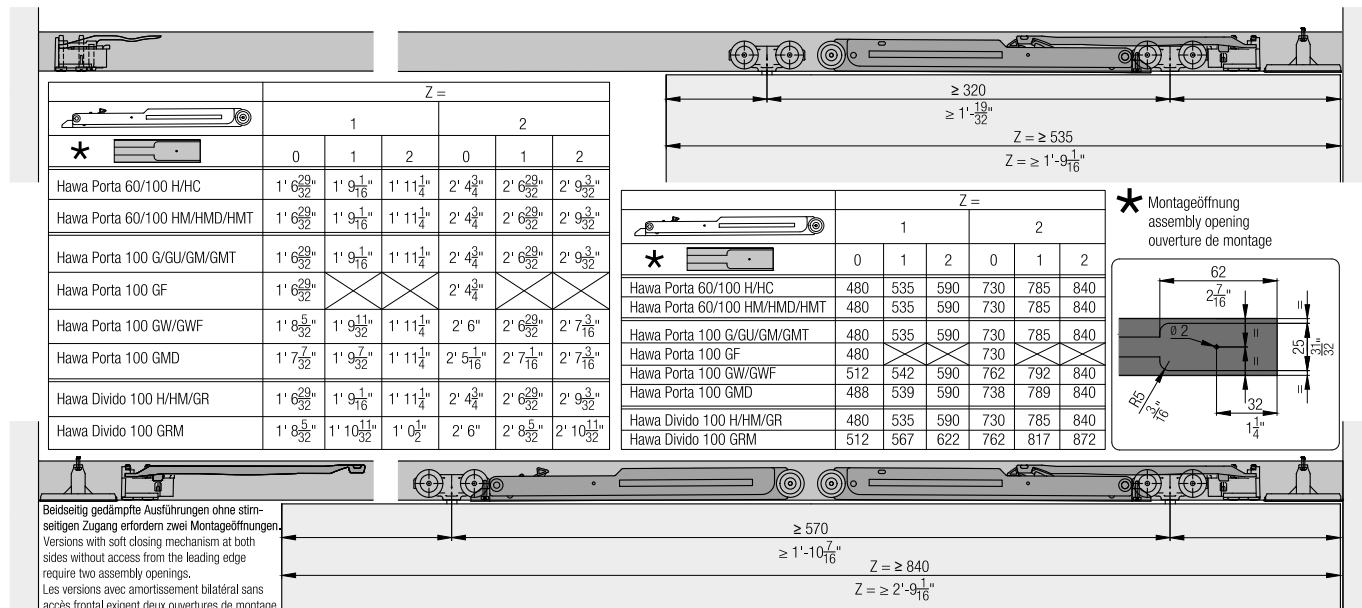
Calculations of panels



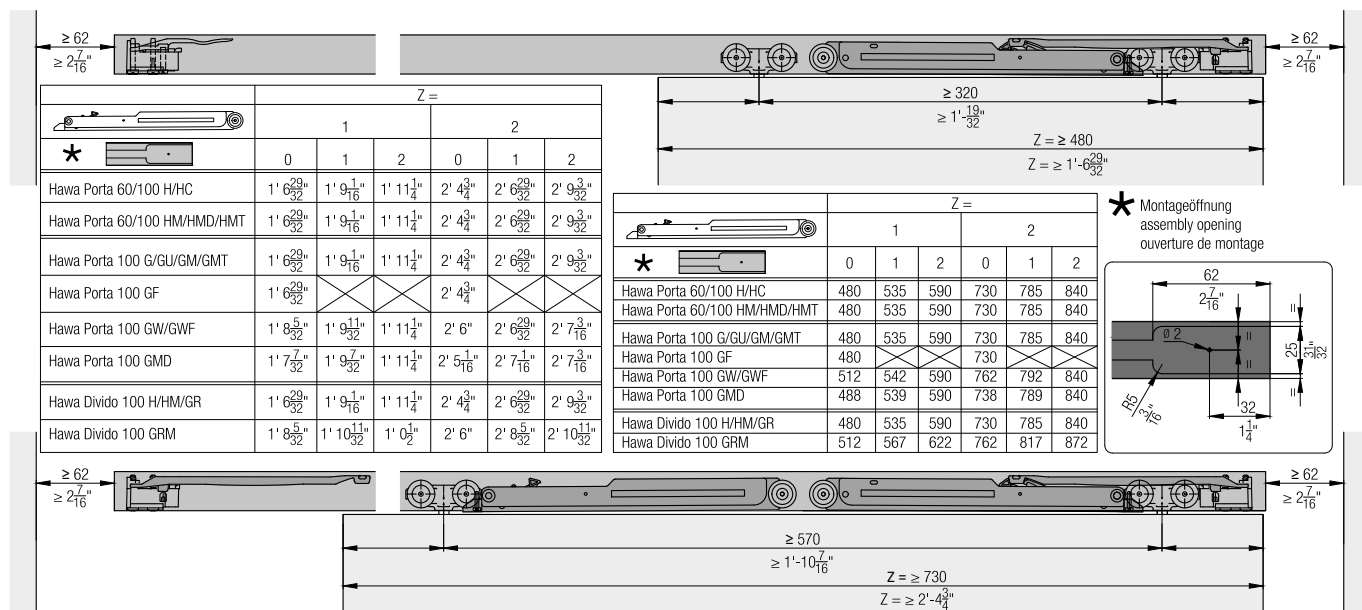
Wall mounting bottom guide



Soft close



Soft close



Accessories

- Lock solutions from page 511
- General accessories from page 518

Planning/execution

Further information about the product can be found on www.hawa.com.