

Convertible rooms – just how you like it.

Hawa Concepta III Family



Hawa Concepta III

Hawa Folding Concepta III

On furniture: Sliding solution for furniture doors which can be pivoted, folded, pushed in and parked in a very small space at the side.

Hawa Concepta III family

Redesign of the pivot and folding/ slide-in doors

Designing hardware and systems that are optimally coordinated with current user requirements: In order to do this, Hawa Sliding Solutions is always prepared to go in new directions.

The newly designed Hawa Concepta III family is the perfect example of this. It follows an innovative basic approach: Only making rooms visible when they are needed. Contemporary trends such as lack of urban living space and the associated demand for using living areas in an economical and multi-functional way have been anticipated perfectly in this way.

This is because the Hawa Concepta III and the Hawa Folding Concepta III make it possible to conjure up an office or an entire kitchen from virtually nothing, and make it disappear again. And they reveal themselves to be space economy experts by requiring very little room in the parked position.



The combination of the two systems creates new, exciting design possibilities.



More aesthetics

Design is also always that which you don't see: With the new Hawa Concepta III family, work surfaces and entire kitchens can be reduced to an elegant, flush front with an even gap pattern. If you prefer a puristic appearance, you can even dispense with handles.



More comfort

Making the contents of a cabinet disappear within seconds only requires a minimal amount of effort with the Hawa Concepta III technology. The pioneering, patented system guarantees an even, extremely smooth movement with its sophisticated operating assistance.

More efficiency

The qualities of the Hawa Concepta III family are already evident during processing. The high degree of pre-assembly makes installation easier, and the logically positioned, easily accessible adjusting points simplify adjustment, and the entire system therefore supports increased productivity.

Wide range of design options

Rooms have never been as flexible as this

The Hawa Concepta systems of the newest generation display their full quality in the kitchen. They make floor-to-ceiling designs, highboards or wall units with two, three or four doors possible. This gives you almost unlimited creative freedom.


Height	Hawa Concepta III		Hawa Folding Concepta III	
2850				
2700		Running gear Running gear		Running gear Running gear
2500		2700 ↑ 1900		2700 ↑ 1900
2300	Running gear Running gear		Running gear Running gear	
2200		1900 ↑ Push Pull		1900 ↑ Push Pull
1900				
1850	2200 ↑ 1200 Push Pull		2200 ↑ 1200 Push Pull	
1250				
1200				
Weight	25	35	20	25

Combinations at your fingertips


A solution for every application

The Hawa Concepta III and the Hawa Folding Concepta III can be flexibly combined and implemented in made-to-measure dimensions. In this way, they make variable design solutions possible which are tailored exactly to the room and the type of use.

Hawa Concepta III



Hawa Folding Concepta III



Open room layout

Washroom, wardrobe, home office or kitchen: The users are free to determine what is usable or visible.



Free access

No doors protruding into the room or standing in the way: This is the guarantee of unrestricted usage.



Large areas

Multi-leaf systems and door heights of up to 2700 mm: This is how entire cabinets and single-line kitchens can be made to disappear and reappear again.

Pivot and folding/slide-in hardware offers many advantages

The new Hawa Concepta III family in brief



Flexibility

Variable door dimensions: half-height to floor-to-ceiling solutions possible, including walk-on solutions

Hawa Concepta III and Hawa Folding Concepta III can be combined, for three-door solutions without separating wall



Comfort

Ergonomic movement support for even, smooth movement

Opening and closing with very little effort – one hand is enough



Reliability

Tested for 40,000 cycles (highest class) and maintenance-free for the entire service life (equivalent to approx. 25 years and the average service life of a pivot/slide-in door)

Fulfils the standard in accordance with DIN EN 1527 and DIN EN 1570



Productivity

Efficient planning with the Hawa configurator

Easy installation thanks to high degree of pre-assembly

Intuitive adjustment with easily accessible adjustment points



Aesthetics

Allows constructions with and without handle

Uniform, flush front design with even gap pattern

Invisible technology

Technical product information

You will find all of the necessary ordering information for the Hawa Concepta III and Hawa Folding Concepta III on the following pages.

Hawa Concepta III 25 Push	see page 7
Hawa Concepta III 25 Pull	see page 14
Hawa Concepta III 35 Push	see page 21
Hawa Concepta III 35 Pull	see page 28

Hawa Folding Concepta III 20 Push	see page 35
Hawa Folding Concepta III 20 Pull	see page 50
Hawa Folding Concepta III 25 Push	see page 65
Hawa Folding Concepta III 25 Pull	see page 80

Pocket system for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

- Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
- Comfort** Ergonomic movement support for even, smooth movement
- Aesthetics** Cabinet designs without handle – the technology remains invisible

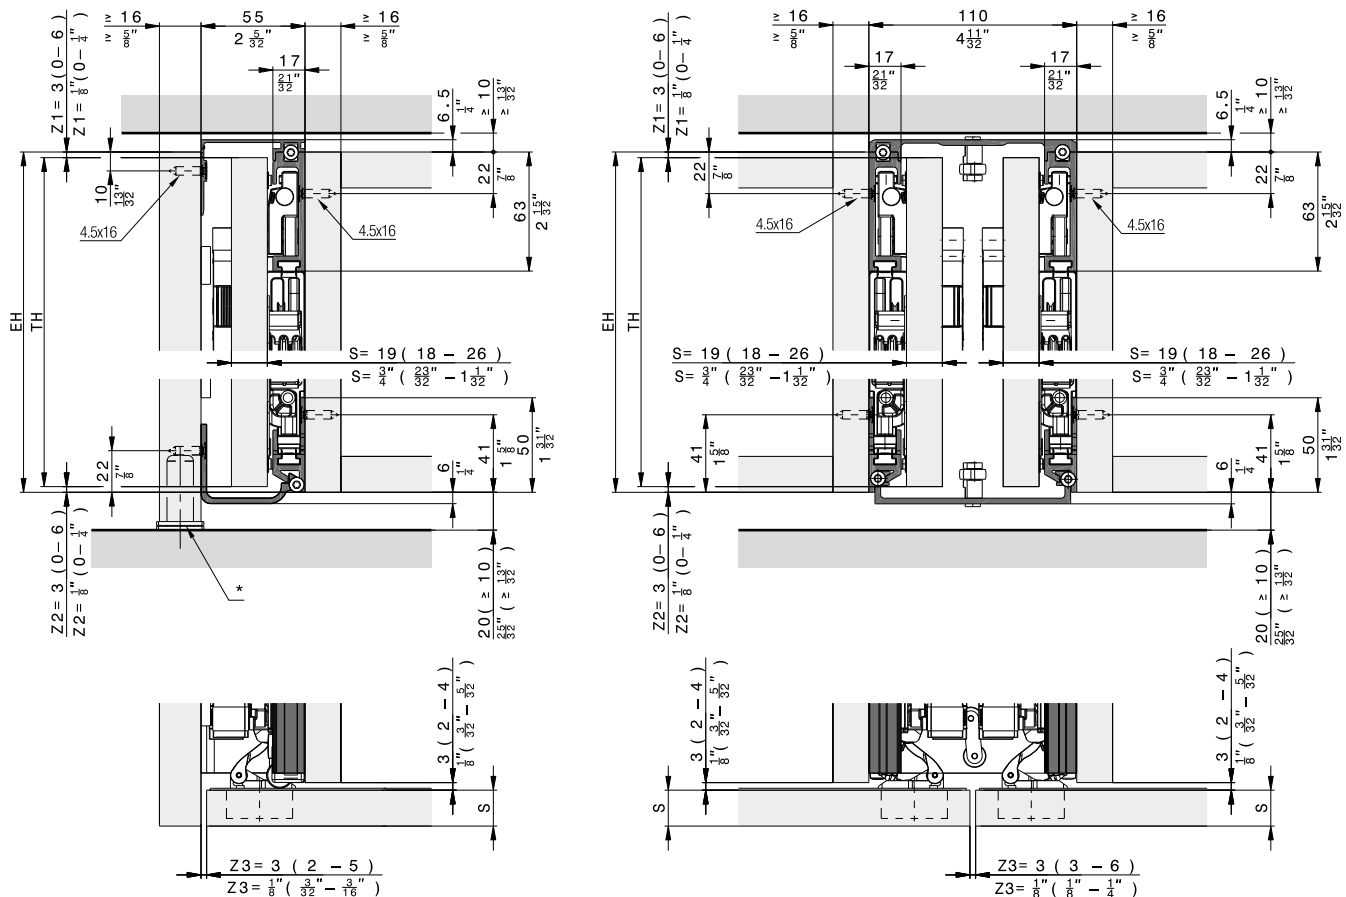
Technical specifications

- 6–25 kg (13 to 55 lbs.)
- 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
- 350–750 mm (1' 5 5/16" to 2' 5 17/32")
- 18–26 mm (23/32" to 1 1/32")





Installation examples

Door striking against the top and bottom cabinet sections



* Recommendation: Use adjustable foot

Components required for one cabinet

Hawa Concepta III V2 25 Push, left

	No.
Hawa Concepta III V2 25 Push/Pull, basic set, left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III V2 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Hawa Concepta III V2 25 Push, right

	No.
Hawa Concepta III V2 25 Push/Pull, basic set, right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III V2 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

		Door width in mm									
		350	400	450	500	550	600	650	700	750	
Door height mm	2200	25	25	25	25	25	25	25	25	25	Maximum weights in kg
	2150	25	25	25	25	25	25	25	25	25	
	2100	25	25	25	25	25	25	25	25	25	
	2050	25	25	25	25	25	25	25	25	25	
	2000	25	25	25	25	25	25	25	25	24	
	1950	25	25	25	25	25	25	25	25	24	
	1900	25	25	25	25	25	25	25	24	23	
	1850	25	25	25	25	25	25	25	24	22	
	1800	25	25	25	25	25	25	24	23	22	
	1750	25	25	25	25	25	25	24	22	21	
	1700	25	25	25	25	25	25	23	22	20	
	1650	25	25	25	25	25	24	22	21	20	
	1600	25	25	25	25	25	23	21	20	19	
	1550	25	25	25	25	25	24	22	21	19	
1500	25	25	25	25	25	23	21	20	19	18	
1450	25	25	25	25	24	22	20	19	18	17	
1400	25	25	25	23	21	20	18	17	16		
1350	25	25	24	22	20	19	18	17	16		
1300	25	25	23	21	19	18	17	16	15		
1250	25	24	22	20	18	17	16	15	14		
1200	25	23	21	19	18	16	15	14	14		
		Door wight in kg									

		Door width in inch										
		1' 1 3/8"	1' 3 3/8"	1' 5 3/8"	1' 7 3/8"	1' 9 3/8"	1' 11 3/8"	2' 1 3/8"	2' 3 3/8"	2' 5 3/8"		
Door height in inch	7' 2 3/8"	55	55	55	55	55	55	55	55	55	55	Maximum weights in lbs.
	7' 3/8"	55	55	55	55	55	55	55	55	55	55	
	6' 10 3/8"	55	55	55	55	55	55	55	55	55	55	
	6' 8 3/8"	55	55	55	55	55	55	55	55	55	55	
	6' 6 3/8"	55	55	55	55	55	55	55	55	55	53	
	6' 4 3/8"	55	55	55	55	55	55	55	55	55	53	
	6' 2 3/8"	55	55	55	55	55	55	55	55	53	51	
	6' 3/8"	55	55	55	55	55	55	55	55	53	49	
	5' 10 3/8"	55	55	55	55	55	55	55	53	51	49	
	5' 8 3/8"	55	55	55	55	55	55	55	53	49	46	
	5' 6 3/8"	55	55	55	55	55	55	55	51	49	44	
	5' 4 3/8"	55	55	55	55	55	55	53	49	46	44	
	5' 3 3/8"	55	55	55	55	55	55	51	46	44	42	
	5' 1 3/8"	55	55	55	55	55	53	49	46	42	40	
	4' 11 3/8"	55	55	55	55	55	51	46	44	42	40	
	4' 9 3/8"	55	55	55	55	53	49	44	42	40	37	
4' 7 3/8"	55	55	55	55	51	46	44	40	37	37		
4' 5 3/8"	55	55	55	53	49	44	42	40	37	35		
4' 3 3/8"	55	55	51	46	42	40	40	37	35	33		
4' 1 3/8"	55	53	49	44	40	37	35	35	33	31		
3' 11 3/8"	55	51	46	42	40	35	33	33	31	31		
		Door wight in lbs.										

Hawa Configurator


www.hawa.com/configurator →

List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 25 kg (55 lbs.)

	No.
Hawa Concepta III V2 25 Push/Pull, basic set, left, door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8")	30994
Hawa Concepta III V2 25 Push/Pull, basic set, right, door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8")	30995

Set consisting of:

		30994	30995	No.
	Slot nuts for hinge attachment, plastic, black	3	3	30686
	Mounting plate for hinge with height adjustment, steel	1	1	52616
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	3	52621
	Screw set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x 1/2"), steel, black, set of 3 pieces	2	2	53562
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		30805
	Running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (5/32"x5/8"), set of 16 pieces, incl. T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	30806
	Top running track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31060

Suitable slide-in set


	No.
Hawa Concepta III V2 25/35 Push, slide-in set, left	30998
Hawa Concepta III V2 25/35 Push, slide-in set, right	30999

		30998	30999	No.
	Hawa Concepta III V2 25/35 Push slide-in unit, left	1		52645
	End stop bracket for push ejector, steel, zinc-plated	1	1	52559
	Push ejector, plastic, black	1	1	52454
	Push-to-open with adapter plate, plastic, black	1	1	30838
	Hawa Concepta III V2 Push set of cover caps, for left-hand stop, plastic, black	1		52648
	Hawa Concepta III V2 25/35 Push slide-in unit, right		1	52644
	Hawa Concepta III V2 Push set of cover caps, for right-hand stop, plastic, black		1	52649

Upright

		No.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007
	Connector clips, exterior connection to cabinet, bottom, 2 pieces		53554

Guides

		No.
	Guide for two inset pivot sliding doors, aluminum	25680

Accessories

		No.
	Allen key, with handle, 3 mm (1/8'')	13164
	Allen key 4 mm (5/32''), length 160 mm (6 5/16'')	19931

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the Hawa-specific SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

	No.
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces	056.3192.079
Straightening fitting for doors 1215–1775 mm (3' 11 27/32"–5' 9 27/32''), aluminum, can be shortened for doors smaller than 1215 mm (3' 11 27/32''), set of 2 pieces	056.3192.073

Aluminum, anodized

	No.
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces	056.3192.080

Aluminum, black anodized

	No.
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, black anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces	056.3192.081
Straightening fitting for doors 1215–1775 mm (3' 11 27/32"–5' 9 27/32''), aluminum, black anodized, can be shortened for doors smaller than 1215 mm (3' 11 27/32''), set of 2 pieces	056.3192.076

Hawa Straightening fitting

Aluminum, untreated
(without cover caps)


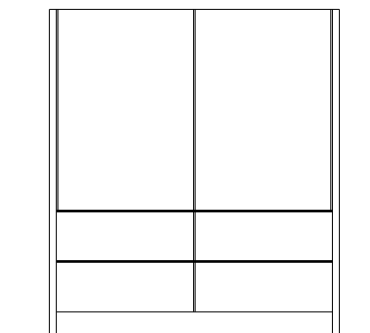
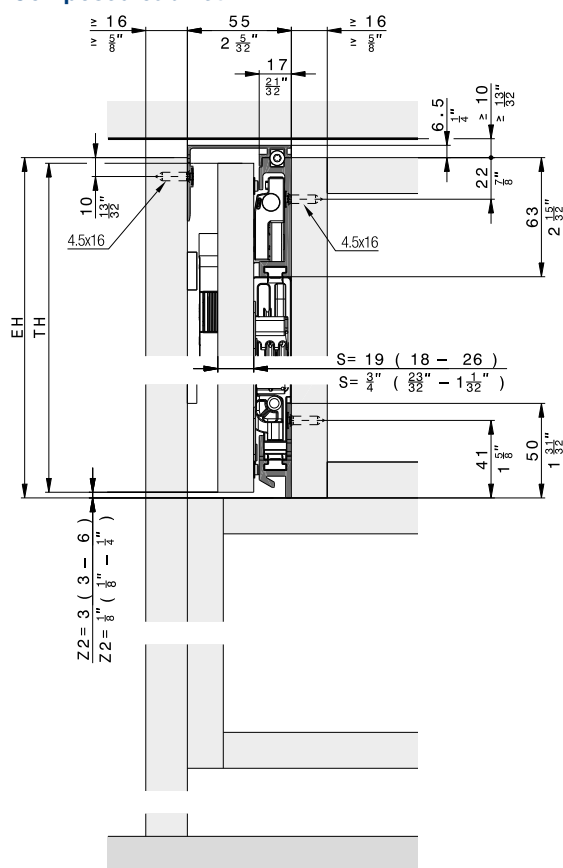
Aluminum, anodized
(with cover caps)

Aluminum, black anodized
(with cover caps)





Further installation examples

Composed cabinet




Cabinet without base panel

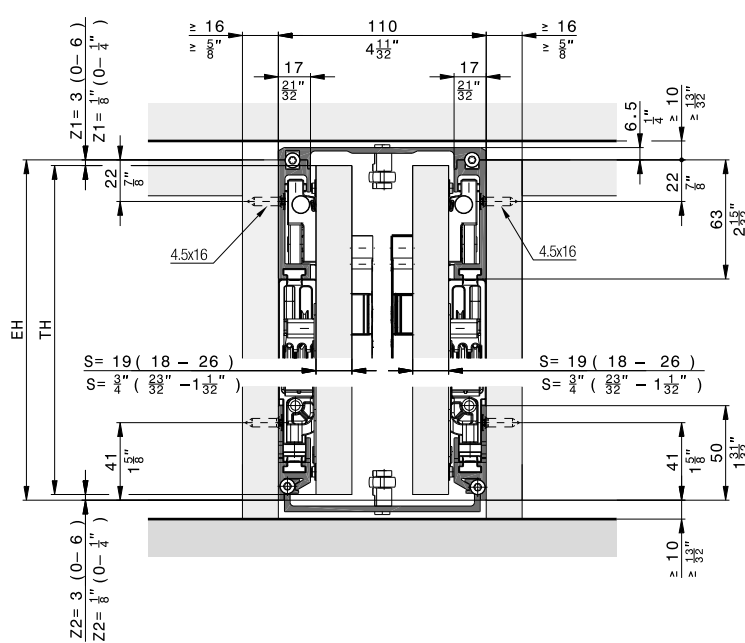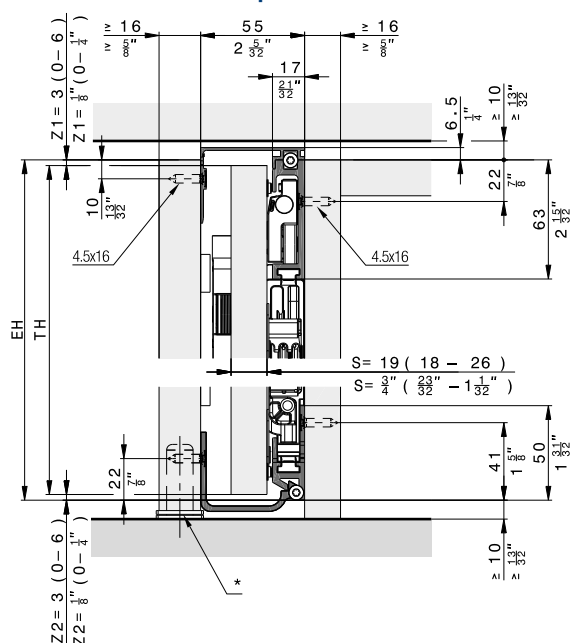


* Recommendation: Use adjustable foot

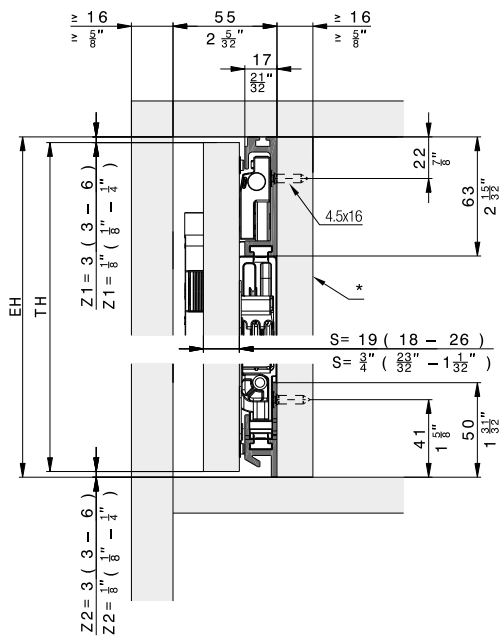
Inlaid doors



* removable

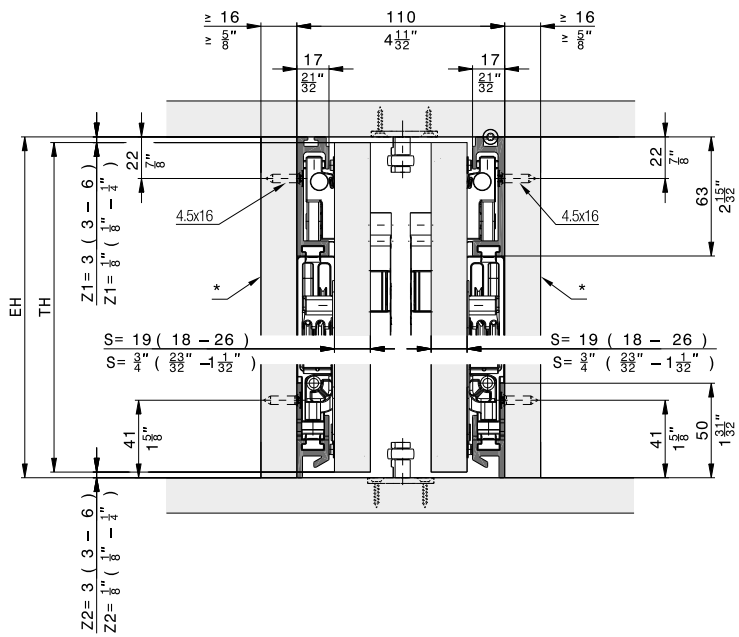


Floor-to-ceiling doors

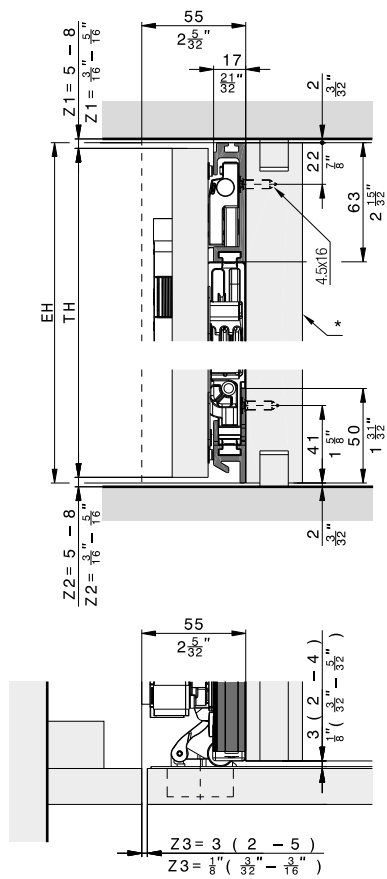

* removable

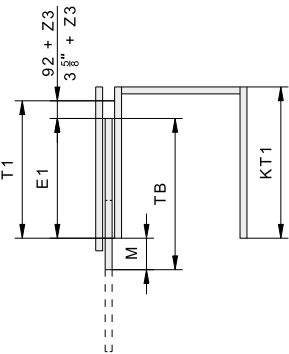
Hardware depth calculation




	mm	Inch
T1	≥ 414	≥ 1' 4 ⁵ / ₁₆ "

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₈ " + Z3 - M
E1	TB - M	TB - M
M	≥S+3 ≤TB-320	≥S + ¹ / ₈ " ≤TB - 1 ¹⁹ / ₃₂ "

Door flush with outer face



Protruding door

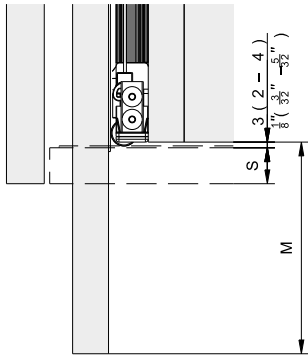

Pocket system for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.

Product highlights



Productivity

Easy installation thanks to high degree of pre-assembly with intuitive adjustment



Comfort

Ergonomic movement support for even, smooth movement



Aesthetics

Allows constructions with and without handle – the technology remains invisible

Technical specifications



6–25 kg (13 to 55 lbs.)



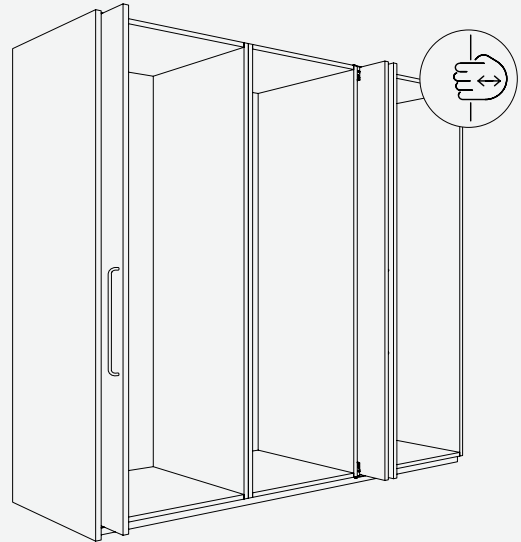
1200–2200 mm (3' 11 1/4" to 7' 2 5/8")



350–750 mm (1' 5 5/16" to 2' 5 17/32")





18–26 mm (23/32" to 1 1/32")





Installation examples

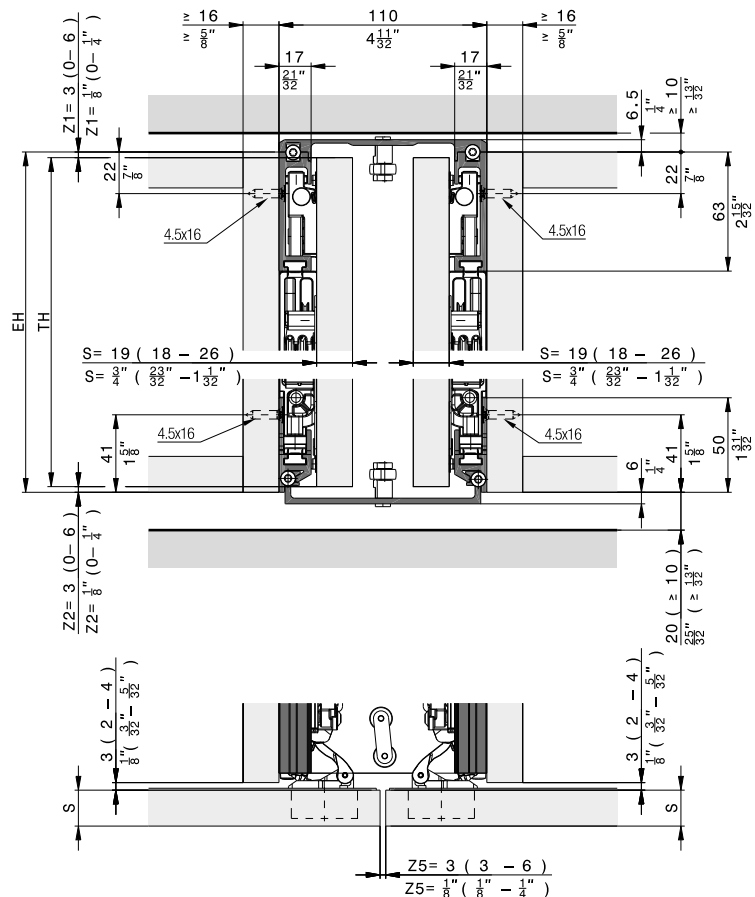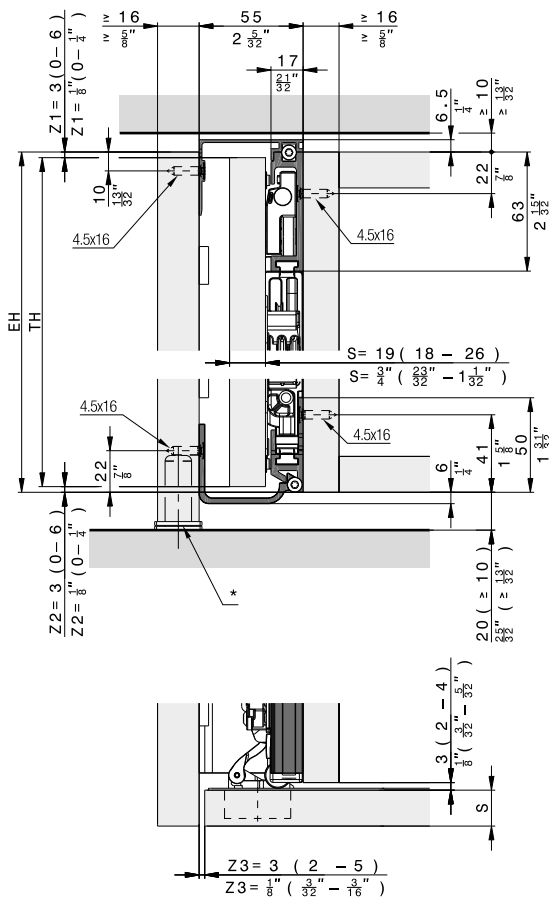Door striking against the top and bottom cabinet sections



* Recommendation: Use adjustable foot

Components required for one cabinet



Hawa Concepta III V2 25 Pull, left

	No.
Hawa Concepta III V2 25 Push/Pull, basic set, left, door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8")	30994
Hawa Concepta III V2 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Hawa Concepta III V2 25 Pull, right

	No.
Hawa Concepta III V2 25 Push/Pull, basic set, right, door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8")	30995
Hawa Concepta III V2 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

		Door width in mm								
		350	400	450	500	550	600	650	700	750
Door height mm	2200	25	25	25	25	25	25	25	25	25
	2150	25	25	25	25	25	25	25	25	25
	2100	25	25	25	25	25	25	25	25	25
	2050	25	25	25	25	25	25	25	25	25
	2000	25	25	25	25	25	25	25	25	24
	1950	25	25	25	25	25	25	25	25	24
	1900	25	25	25	25	25	25	25	24	23
	1850	25	25	25	25	25	25	25	24	22
	1800	25	25	25	25	25	25	24	23	22
	1750	25	25	25	25	25	25	24	22	21
	1700	25	25	25	25	25	25	23	22	20
	1650	25	25	25	25	25	24	22	21	20
Maximum weights in kg	1600	25	25	25	25	25	23	21	20	19
	1550	25	25	25	25	24	22	21	19	18
	1500	25	25	25	25	23	21	20	19	18
	1450	25	25	25	24	22	20	19	18	17
	1400	25	25	25	23	21	20	18	17	16
	1350	25	25	24	22	20	19	18	17	16
	1300	25	25	23	21	19	18	17	16	15
	1250	25	24	22	20	18	17	16	15	14
	1200	25	23	21	19	18	16	15	14	14
	Door weight in kg									

		Door width in inch								
		1' 1 3/8"	1' 3 3/8"	1' 5 3/8"	1' 7 3/8"	1' 9 3/8"	1' 11 3/8"	2' 1 3/8"	2' 3 3/8"	2' 5 3/8"
Door height in inch	7' 2 3/8"	55	55	55	55	55	55	55	55	55
	7' 3/8"	55	55	55	55	55	55	55	55	55
	6' 10 3/8"	55	55	55	55	55	55	55	55	55
	6' 8 3/8"	55	55	55	55	55	55	55	55	55
	6' 6 3/8"	55	55	55	55	55	55	55	55	53
	6' 4 3/8"	55	55	55	55	55	55	55	55	53
	6' 2 3/8"	55	55	55	55	55	55	55	53	51
	6' 3/8"	55	55	55	55	55	55	55	53	49
	5' 10 3/8"	55	55	55	55	55	55	53	51	49
	5' 8 3/8"	55	55	55	55	55	55	53	49	46
	5' 6 3/8"	55	55	55	55	55	55	51	49	44
	5' 4 3/8"	55	55	55	55	55	53	49	46	44
Maximum weights in lbs.	5' 3 3/8"	55	55	55	55	55	51	46	44	42
	5' 1 3/8"	55	55	55	55	53	49	46	42	40
	4' 11 3/8"	55	55	55	55	51	46	44	42	40
	4' 9 3/8"	55	55	55	53	49	44	42	40	37
	4' 7 3/8"	55	55	55	51	46	44	40	37	37
	4' 5 3/8"	55	55	53	49	44	42	40	37	35
	4' 3 3/8"	55	55	51	46	42	40	37	35	33
	4' 1 3/8"	55	53	49	44	40	37	35	33	31
	3' 11 3/8"	55	51	46	42	40	35	33	31	31
	Door weight in lbs.									

Hawa Configurator

www.hawa.com/configurator →

List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 25 kg (55 lbs.)

	No.
Hawa Concepta III V2 25 Push/Pull, basic set, left, door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8")	30994
Hawa Concepta III V2 25 Push/Pull, basic set, right, door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8")	30995


		30994	30995	No.
Set consisting of:				
	Slot nuts for hinge attachment, plastic, black	3	3	30686
	Mounting plate for hinge with height adjustment, steel	1	1	52616
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	3	52621
	Screw set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x 1/2"), steel, black, set of 3 pieces	2	2	53562
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		30805
	Running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (5/32"x5/8"), set of 16 pieces, incl. T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	30806
	Top running track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31060

Suitable slide-in set


	No.
Hawa Concepta III V2 25/35 Pull, slide-in set, left	31000
Hawa Concepta III V2 25/35 Pull, slide-in set, right	31001

		31000	31001	No.
Set consisting of:				
	Hawa Concepta III V2 25/35 Pull slide-in unit, left	1		52643
	Pull end stop bracket, steel, zinc-plated	1	1	31414
	Soft closing mechanism	1	1	31221
	Hawa Concepta III V2 Pull set of cover caps, for left-hand stop, plastic, black	1		52650
	Hawa Concepta III V2 25/35 Pull slide-in unit, right		1	52642
	Hawa Concepta III V2 Pull set of cover caps, for right-hand stop, plastic, black		1	52651

Upright

	No.
 Upright profile, for door height 1200–2200 mm (3' 11 1/4"–7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007
	Connector clips, exterior connection to cabinet, bottom, 2 pieces		53554

Guides

	No.
	25680

Accessories

	No.
	13164
	19931

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the Hawa-specific SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

	No.
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces	056.3192.079
Straightening fitting for doors 1215–1775 mm (3' 11 27/32"–5' 9 27/32''), aluminum, can be shortened for doors smaller than 1215 mm (3' 11 27/32''), set of 2 pieces	056.3192.073

Aluminum, anodized

	No.
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces	056.3192.080

Aluminum, black anodized

	No.
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16''), aluminum, black anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32''), set of 2 pieces	056.3192.081
Straightening fitting for doors 1215–1775 mm (3' 11 27/32"–5' 9 27/32''), aluminum, black anodized, can be shortened for doors smaller than 1215 mm (3' 11 27/32''), set of 2 pieces	056.3192.076

Hawa Straightening fitting

Aluminum, untreated
(without cover caps)


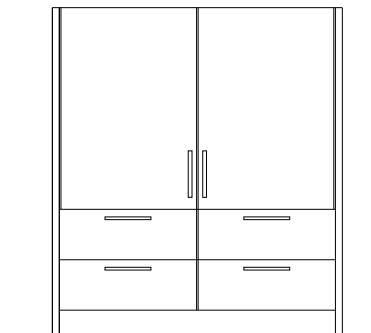
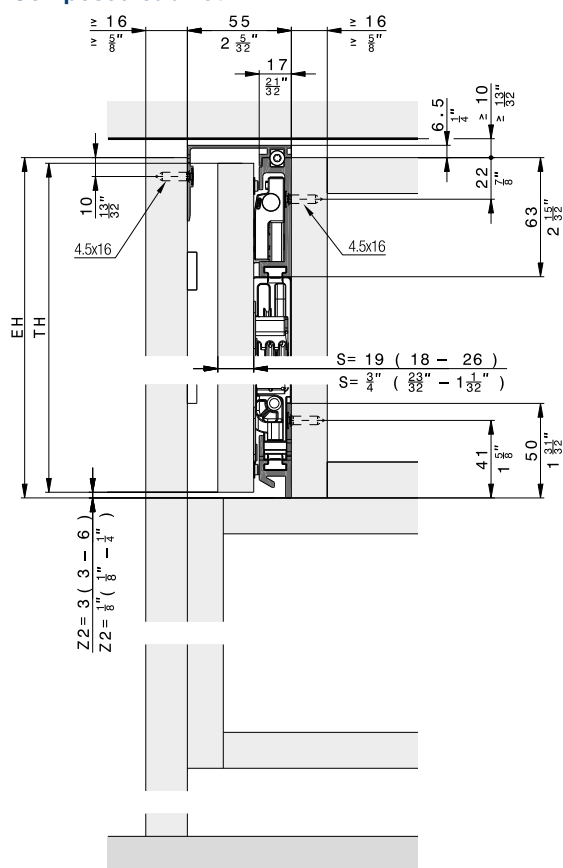
Aluminum, anodized
(with cover caps)

Aluminum, black anodized
(with cover caps)





Further installation examples

Composed cabinet





Cabinet without base panel

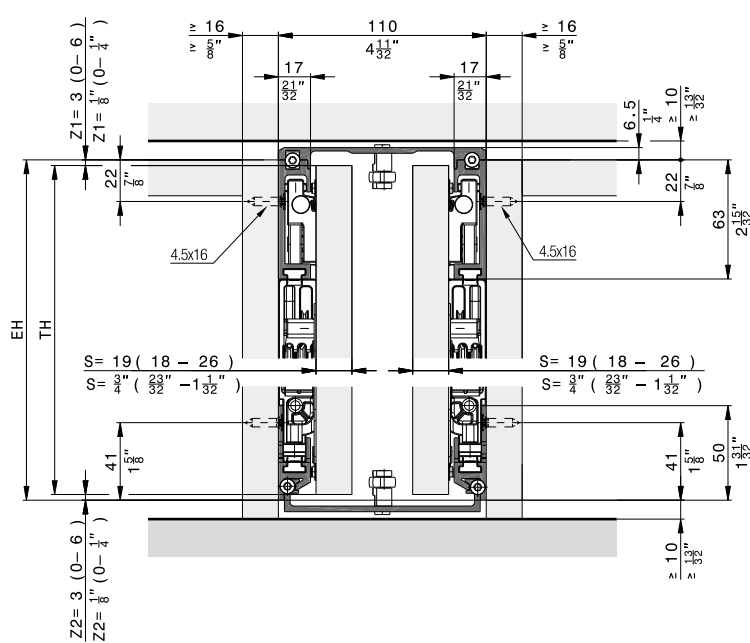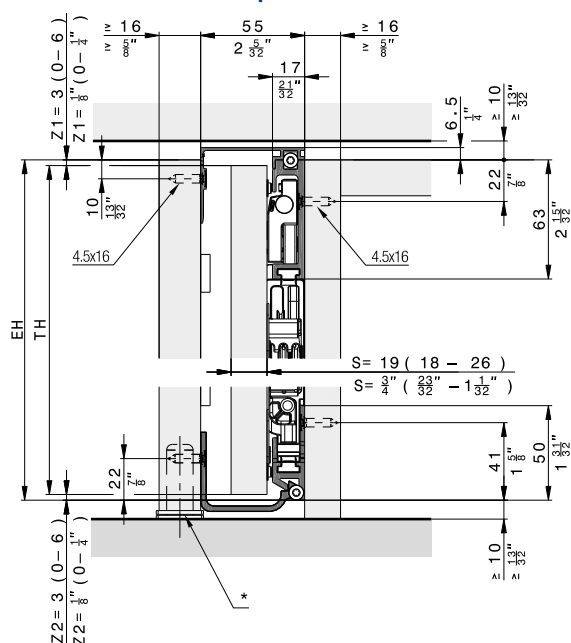


* Recommendation: Use adjustable foot

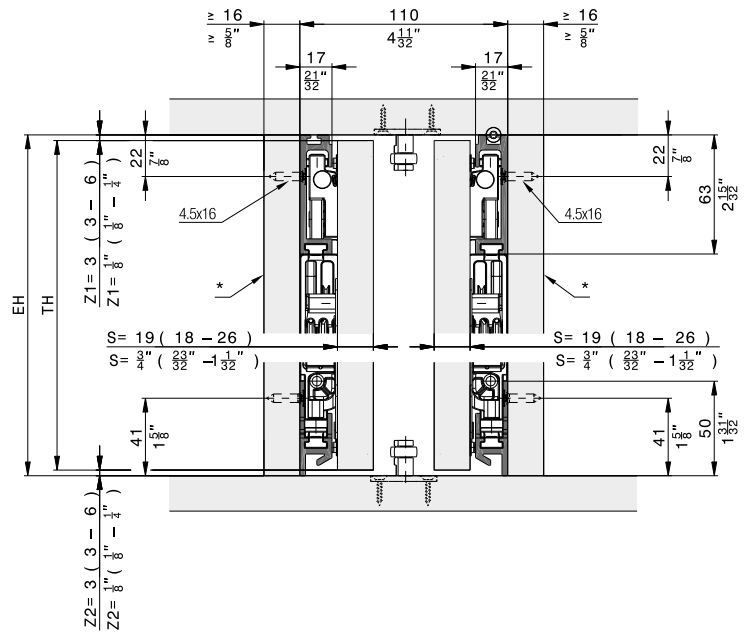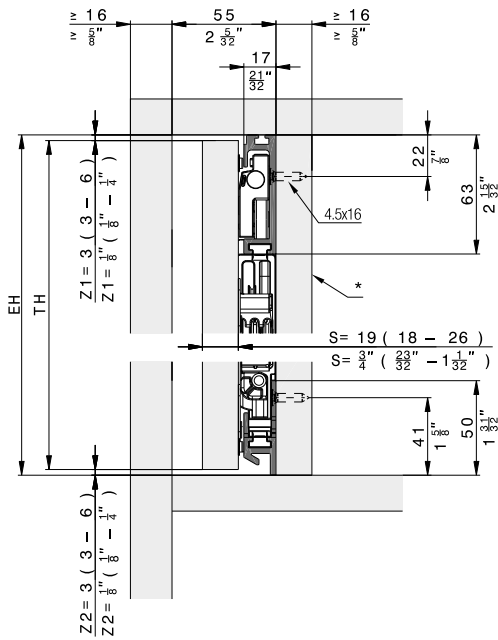Inlaid doors




* removable

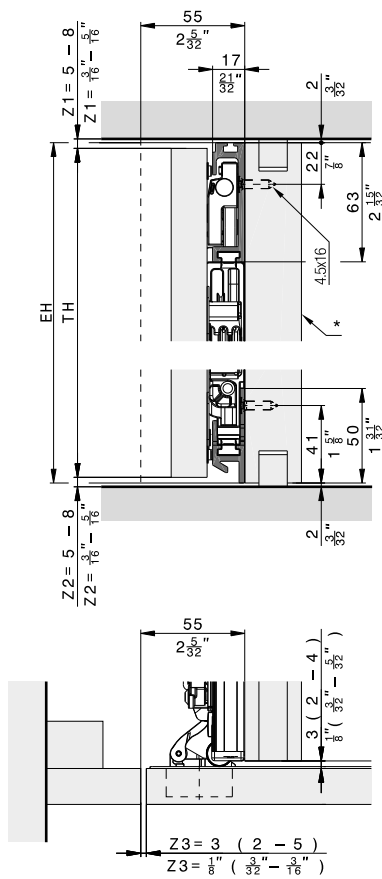Floor-to-ceiling doors



* removable

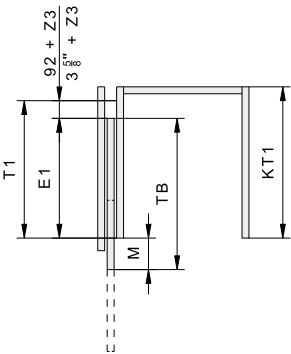
Hardware depth calculation




	mm	Inch
T1	≥ 414	≥ 1' 4 ⁵ / ₁₆ "

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₈ " + Z3 - M
E1	TB - M	TB - M
M	≥S+3 ≤TB-320	≥S + ¹ / ₈ " ≤TB - 1 ¹⁹ / ₃₂ "

Door flush with outer face



Protruding door

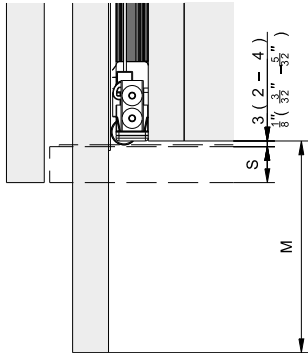


Pocket system for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

-  **Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
-  **Comfort** Ergonomic movement support for even, smooth movement
-  **Aesthetics** Cabinet designs without handle – the technology remains invisible


Technical specifications

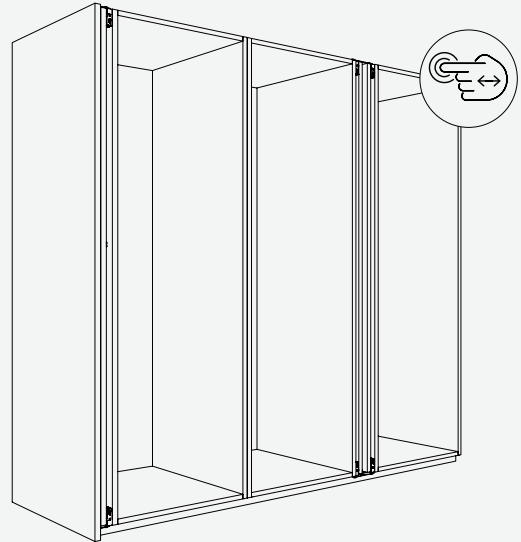-  10–35 kg (22 to 77 lbs.)
-  1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
-  350–750 mm (1' 5 5/16" to 2' 5 17/32")
-  18–26 mm (23/32" to 1 1/32")





Installation examples

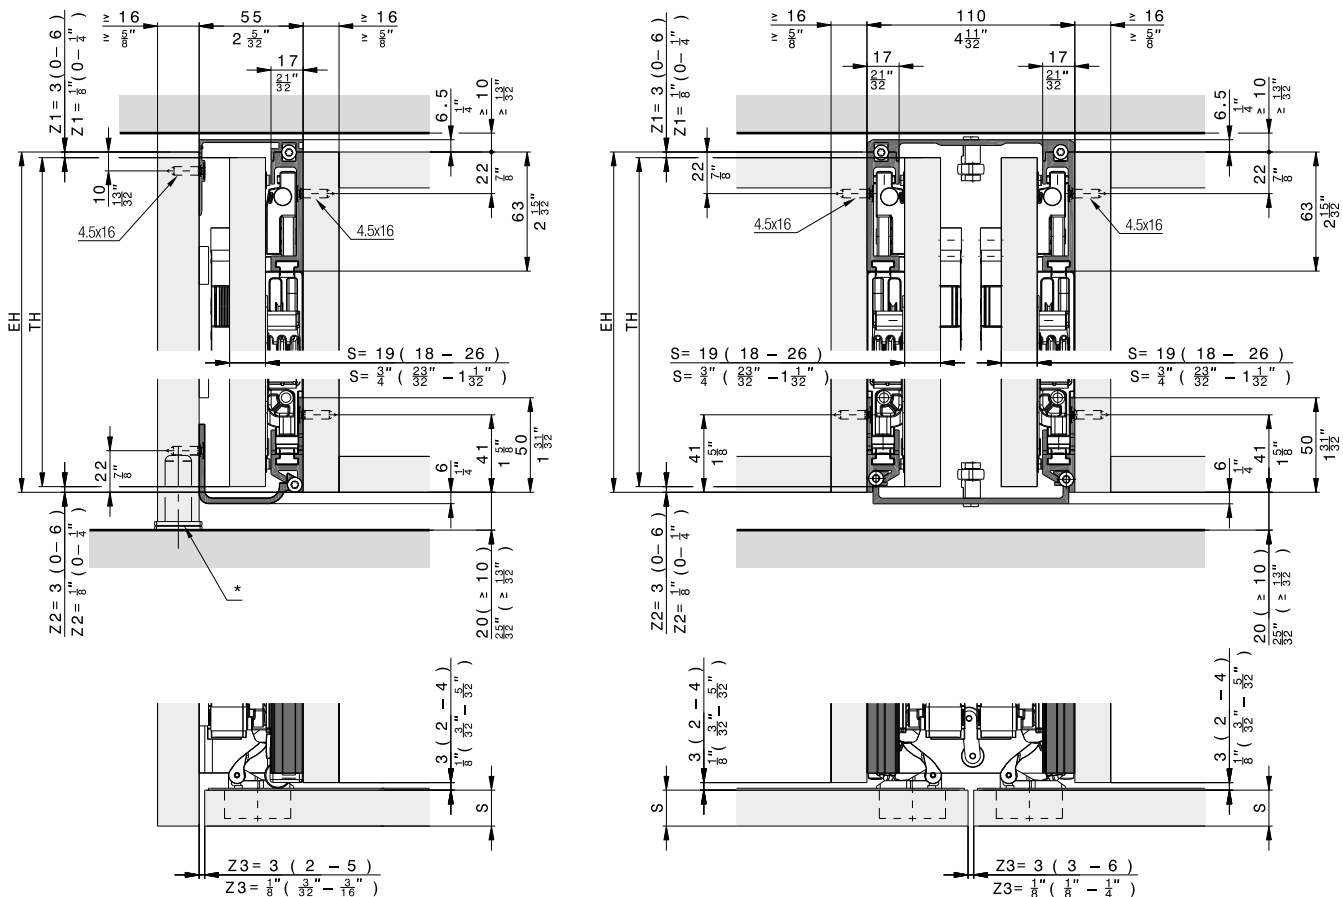Door striking against the top and bottom cabinet sections



* Recommendation: Use adjustable foot

Components required for one cabinet

Hawa Concepta III V2 35 Push, left

	No.
Hawa Concepta III V2 35 Push/Pull, basic set, left, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")	30996
Hawa Concepta III V2 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Hawa Concepta III V2 35 Push, right

	No.
Hawa Concepta III V2 35 Push/Pull, basic set, right, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")	30997
Hawa Concepta III V2 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

		Door width in mm								
		350	400	450	500	550	600	650	700	750
Door height mm	2200	25	25	25	25	25	25	25	25	25
	2150	25	25	25	25	25	25	25	25	25
	2100	25	25	25	25	25	25	25	25	25
	2050	25	25	25	25	25	25	25	25	25
	2000	25	25	25	25	25	25	25	25	24
	1950	25	25	25	25	25	25	25	25	24
	1900	25	25	25	25	25	25	25	24	23
	1850	25	25	25	25	25	25	25	24	22
	1800	25	25	25	25	25	25	24	23	22
	1750	25	25	25	25	25	25	24	22	21
	1700	25	25	25	25	25	25	23	22	20
	1650	25	25	25	25	25	24	22	21	20
	1600	25	25	25	25	25	23	21	20	19
	1550	25	25	25	25	24	22	21	19	18
	1500	25	25	25	25	23	21	20	19	18
	1450	25	25	25	24	22	20	19	18	17
	1400	25	25	25	23	21	20	18	17	16
	1350	25	25	24	22	20	19	18	17	16
	1300	25	25	23	21	19	18	17	16	15
	1250	25	24	22	20	18	17	16	15	14
	1200	25	23	21	19	18	16	15	14	14
		Door width in mm								
		Door weight in kg								

		Door width in inch								
		1' 1 1/8"	1' 3 1/8"	1' 5 1/8"	1' 7 1/8"	1' 9 1/8"	1' 11 1/8"	2' 1 1/8"	2' 3 1/8"	2' 5 1/8"
Door height in inch	7' 2 1/8"	55	55	55	55	55	55	55	55	55
	7'	55	55	55	55	55	55	55	55	55
	6' 10 1/8"	55	55	55	55	55	55	55	55	55
	6' 8 1/8"	55	55	55	55	55	55	55	55	55
	6' 6 1/8"	55	55	55	55	55	55	55	55	53
	6' 4 1/8"	55	55	55	55	55	55	55	55	53
	6' 2 1/8"	55	55	55	55	55	55	55	53	51
	6'	55	55	55	55	55	55	55	53	49
	5' 10 1/8"	55	55	55	55	55	55	53	51	49
	5' 8 1/8"	55	55	55	55	55	55	53	49	46
	5' 6 1/8"	55	55	55	55	55	55	51	49	44
	5' 4 1/8"	55	55	55	55	55	55	53	49	46
	5' 3 1/8"	55	55	55	55	55	55	51	46	44
	5' 1 1/8"	55	55	55	55	55	55	53	49	46
	4' 11 1/8"	55	55	55	55	55	55	51	46	44
	4' 9 1/8"	55	55	55	55	55	55	53	49	46
	4' 7 1/8"	55	55	55	55	55	55	51	46	44
	4' 5 1/8"	55	55	55	55	55	55	53	49	46
	4' 3 1/8"	55	55	55	55	55	55	53	49	46
	4' 1 1/8"	55	55	55	55	55	55	53	49	46
	3' 11 1/8"	55	55	55	55	55	55	53	49	46
		Door weight in lbs.								


Hawa Configurator
www.hawa.com/configurator


List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

	No.
Hawa Concepta III V2 35 Push/Pull, basic set, left, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")	30996
Hawa Concepta III V2 35 Push/Pull, basic set, right, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")	30997

Set consisting of:

		30996	30997	No.
	Slot nuts for hinge attachment, plastic, black	4	4	30686
	Mounting plate for hinge with height adjustment, steel	1	1	52616
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	4	52621
	Screw set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x 1/2"), steel, black, set of 3 pieces	2	2	53562
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		30805
	Running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (5/32"x5/8"), set of 16 pieces, incl. T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	30806
	Top running track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31060

Suitable slide-in set

	No.
Hawa Concepta III V2 25/35 Push, slide-in set, left	30998
Hawa Concepta III V2 25/35 Push, slide-in set, right	30999

		30998	30999	No.
	Hawa Concepta III V2 25/35 Push slide-in unit, left	1		52645
	End stop bracket for push ejector, steel, zinc-plated	1	1	52559
	Push ejector, plastic, black	1	1	52454
	Push-to-open with adapter plate, plastic, black	1	1	30838
	Hawa Concepta III V2 Push set of cover caps, for left-hand stop, plastic, black	1		52648
	Hawa Concepta III V2 25/35 Push slide-in unit, right		1	52644
	Hawa Concepta III V2 Push set of cover caps, for right-hand stop, plastic, black		1	52649

Upright

		No.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	560 (1' 10 1/16")	31005
	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top	560 (1' 10 1/16")	31430
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, top	500 (1' 7 11/16")	31006
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, bottom	500 (1' 7 11/16")	31246
	Connector 110 mm (4 11/32"), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32")	31007
	Connector clips, exterior connection to cabinet, bottom, 2 pieces		53554

Guides

	No.
	25680

Accessories

	No.
	13164
	19931

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the Hawa-specific SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

	No.
Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8"), aluminum, set of 2 pieces	056.3192.072
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16"), aluminum, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.079

Aluminum, anodized

	No.
Straightening fitting for doors 2240–2850 mm (7' 4 3/16"–9' 4 7/32"), aluminum, anodized, set of 2 pieces	056.3192.071
Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8"), aluminum, anodized, set of 2 pieces	056.3192.082
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16"), aluminum, anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.080

Aluminum, black anodized

	No.
Straightening fitting for doors 2240–2850 mm (7' 4 3/16"–9' 4 7/32"), aluminum, black anodized, incl. cover caps, set of 2 pieces	056.3192.074
Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8"), aluminum, black anodized, set of 2 pieces	056.3192.075
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16"), aluminum, black anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.081

Hawa Straightening fitting


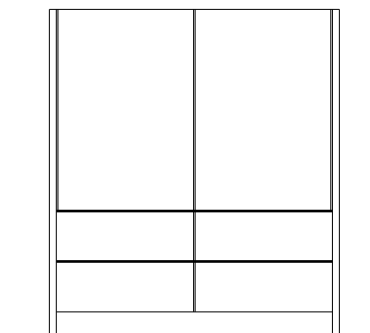
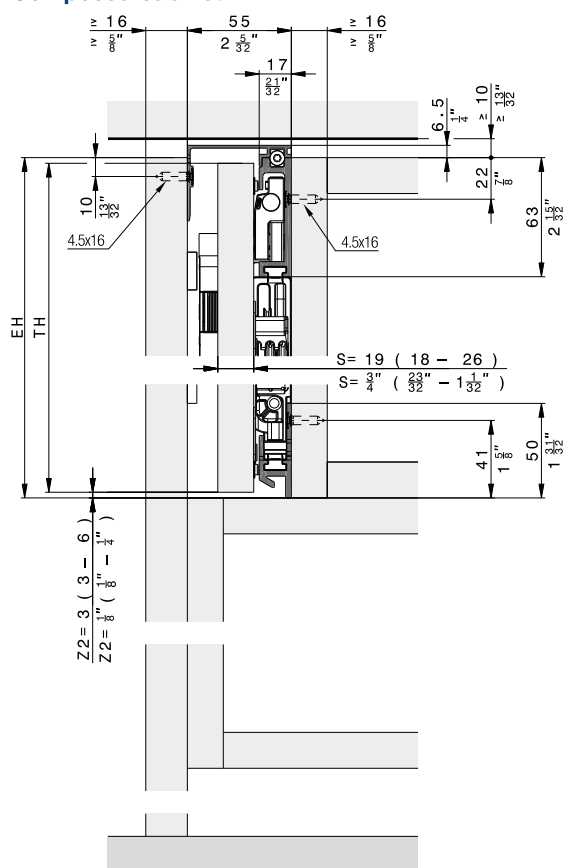
Aluminum, untreated (without cover caps) Aluminum, anodized (with cover caps) Aluminum, black anodized (with cover caps)





Further installation examples

Composed cabinet

Composed cabinet





Cabinet without base panel

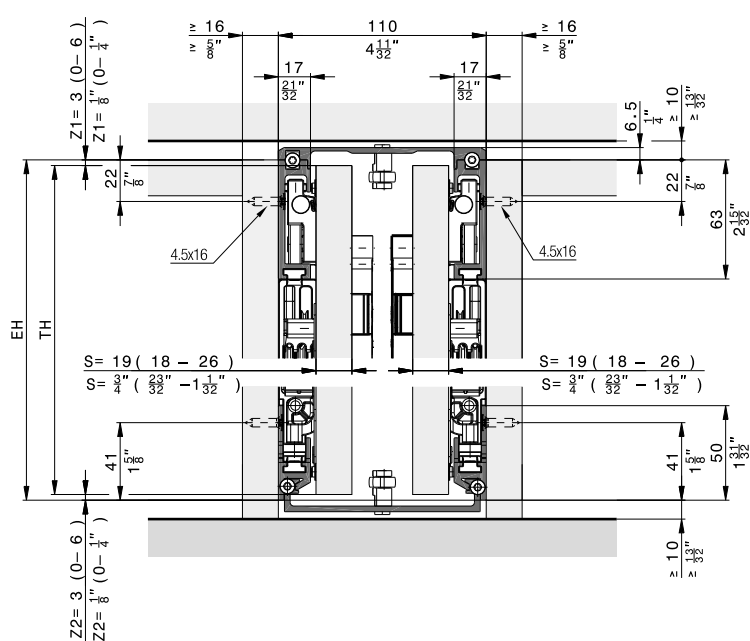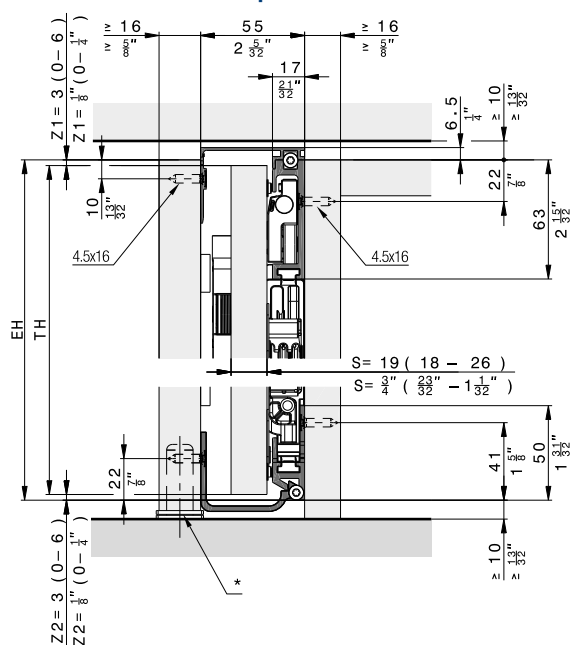


* Recommendation: Use adjustable foot

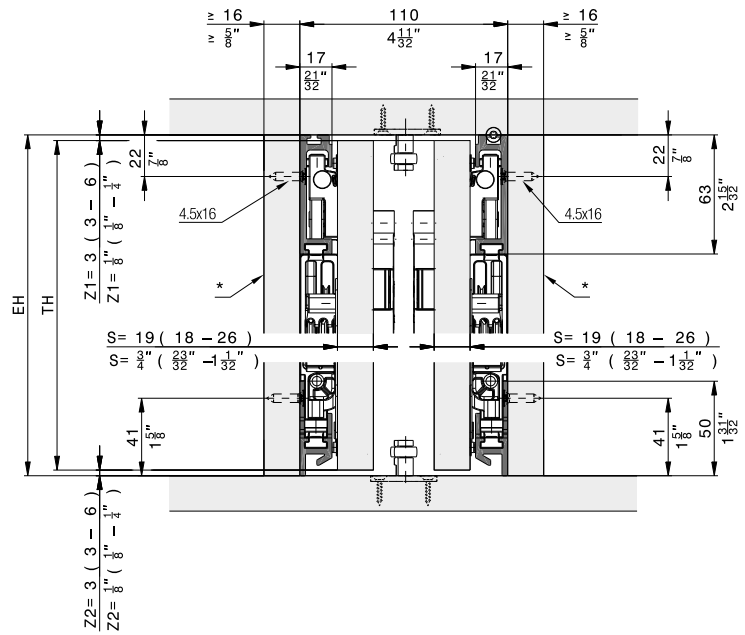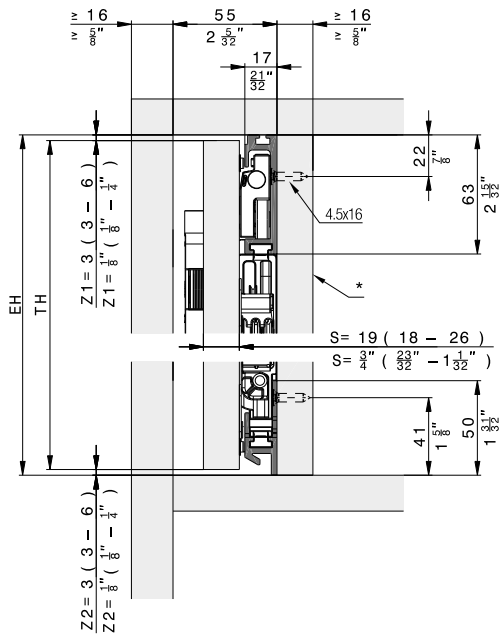Inlaid doors




* removable

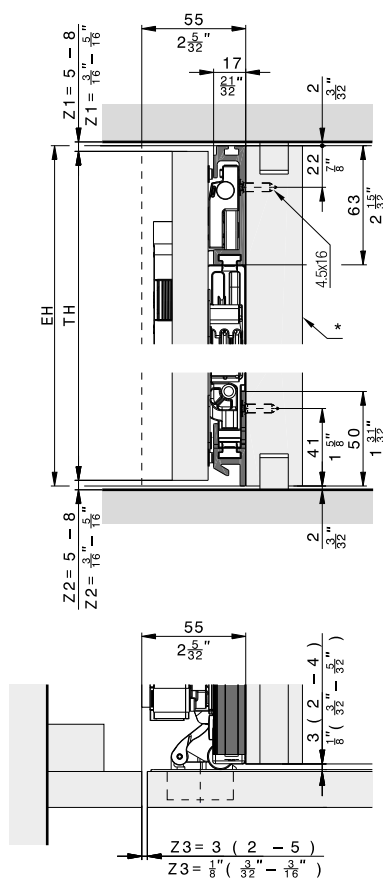Floor-to-ceiling doors



* removable

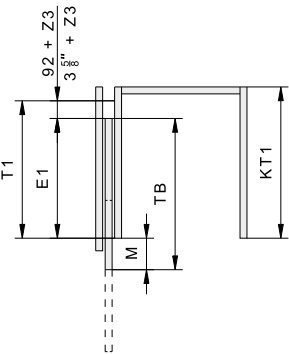
Hardware depth calculation




	mm	Inch
T1	≥ 414	≥ 1' 4 ⁵ / ₁₆ "

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₈ " + Z3 - M
E1	TB - M	TB - M
M	≥S+3 ≤TB-320	≥S + ¹ / ₈ " ≤TB - 1 ¹⁹ / ₃₂ "

Door flush with outer face



Protruding door

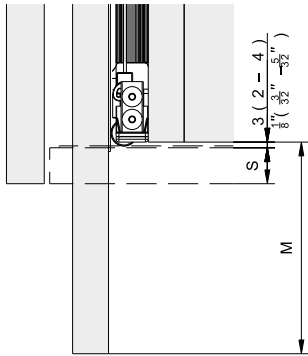

Pocket system for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.). Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.

Product highlights



Productivity

Easy installation thanks to high degree of pre-assembly with intuitive adjustment



Comfort

Ergonomic movement support for even, smooth movement



Aesthetics

Allows constructions with and without handle – the technology remains invisible

Technical specifications



10–35 kg (22 to 77 lbs.)



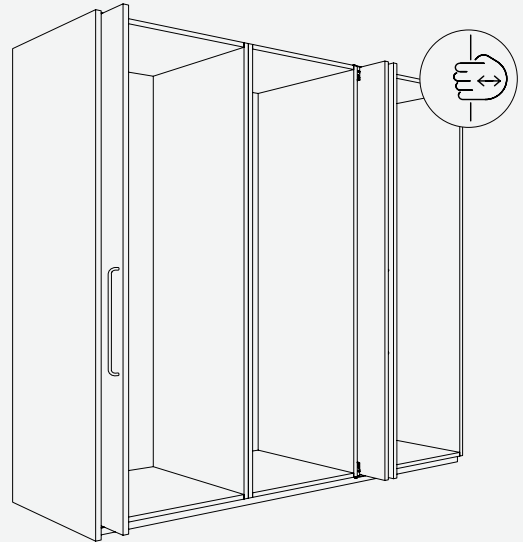
1900–2700 mm (6' 2 13/16" to 8' 10 5/16")



350–750 mm (1' 5 5/16" to 2' 5 17/32")





18–26 mm (23/32" to 1 1/32")





Installation examples

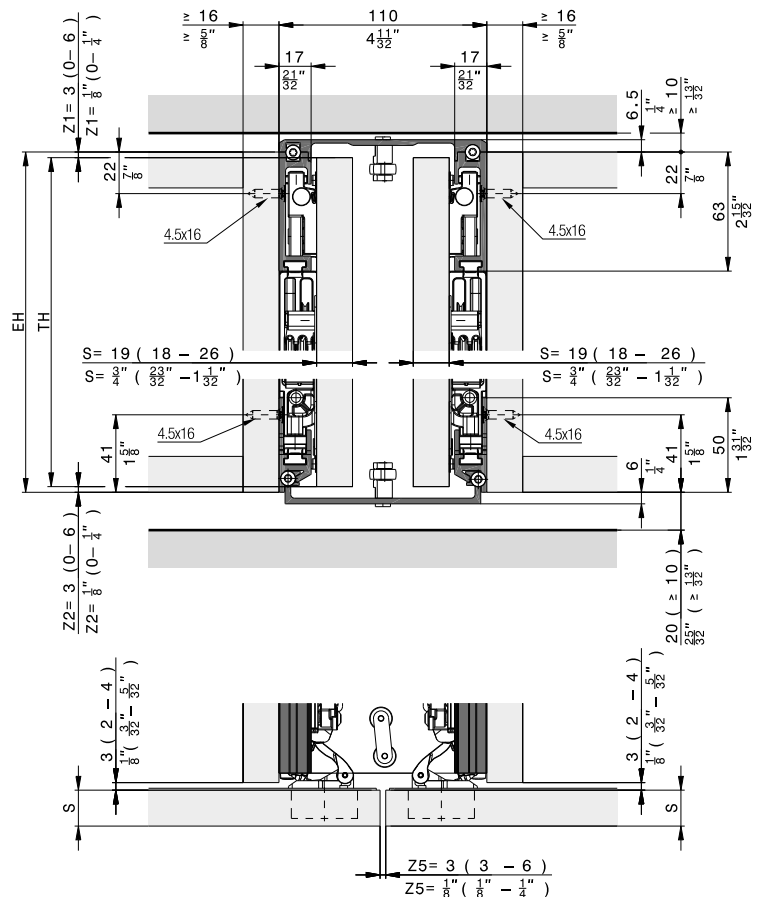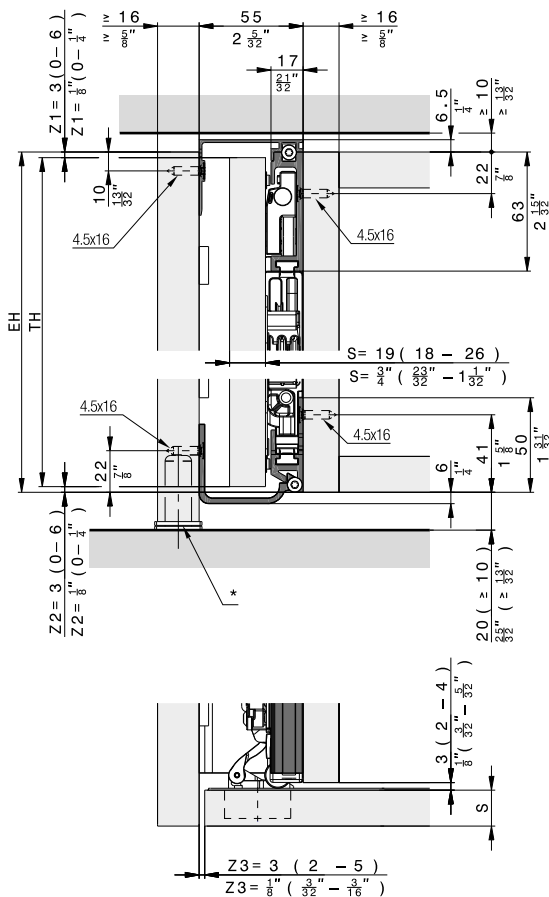Door striking against the top and bottom cabinet sections



* Recommendation: Use adjustable foot

Components required for one cabinet



Hawa Concepta III V2 35 Pull, left

No.	
30996	Hawa Concepta III V2 35 Push/Pull, basic set, left, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")
31000	Hawa Concepta III V2 25/35 Pull, slide-in set, left
30771	Upright profile, for door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")

Hawa Concepta III V2 35 Pull, right

No.	
30997	Hawa Concepta III V2 35 Push/Pull, basic set, right, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")
31001	Hawa Concepta III V2 25/35 Pull, slide-in set, right
30771	Upright profile, for door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

		Door width in mm									
		350	400	450	500	550	600	650	700	750	
Door height mm	2200	25	25	25	25	25	25	25	25	25	Maximum weights in kg
	2150	25	25	25	25	25	25	25	25	25	
	2100	25	25	25	25	25	25	25	25	25	
	2050	25	25	25	25	25	25	25	25	25	
	2000	25	25	25	25	25	25	25	25	24	
	1950	25	25	25	25	25	25	25	25	24	
	1900	25	25	25	25	25	25	25	24	23	
	1850	25	25	25	25	25	25	24	23	22	
	1800	25	25	25	25	25	24	23	22	21	
	1750	25	25	25	25	25	24	22	21	20	
	1700	25	25	25	25	25	23	22	20	20	
	1650	25	25	25	25	24	22	21	20	19	
	1600	25	25	25	25	23	21	20	19	18	
	1550	25	25	25	24	22	21	19	18	17	
	1500	25	25	25	23	21	20	19	18	17	
	1450	25	25	24	22	20	19	18	17	16	
	1400	25	25	24	22	20	19	18	17	16	
	1350	25	25	23	21	19	18	17	16	15	
	1300	25	24	22	20	18	17	16	15	14	
	1250	25	23	21	19	18	16	15	14	14	
	1200	25	23	21	19	18	16	15	14	14	
		Door width in mm									
		350	400	450	500	550	600	650	700	750	

		Door width in inch									
		1' 1 1/8"	1' 3 3/8"	1' 5 3/8"	1' 7 3/8"	1' 9 3/8"	1' 11 3/8"	2' 1 3/8"	2' 3 3/8"	2' 5 3/8"	
Door height in inch	7' 2 3/4"	55	55	55	55	55	55	55	55	55	Maximum weights in lbs.
	7' 1 3/4"	55	55	55	55	55	55	55	55	55	
	6' 10 3/4"	55	55	55	55	55	55	55	55	55	
	6' 8 3/4"	55	55	55	55	55	55	55	55	55	
	6' 6 3/4"	55	55	55	55	55	55	55	55	53	
	6' 4 3/4"	55	55	55	55	55	55	55	55	53	
	6' 2 3/4"	55	55	55	55	55	55	55	53	51	
	6' 1 3/4"	55	55	55	55	55	55	55	53	49	
	5' 10 3/4"	55	55	55	55	55	55	53	51	49	
	5' 8 3/4"	55	55	55	55	55	55	53	49	46	
	5' 6 3/4"	55	55	55	55	55	55	51	49	44	
	5' 4 3/4"	55	55	55	55	55	53	49	46	44	
	5' 3 3/4"	55	55	55	55	55	51	46	44	42	
	5' 1 3/4"	55	55	55	55	53	49	46	42	40	
	4' 11 3/4"	55	55	55	55	51	46	44	42	40	
	4' 9 3/4"	55	55	55	53	49	44	42	40	37	
	4' 7 3/4"	55	55	55	51	46	44	40	37	37	
	4' 5 3/4"	55	55	53	49	44	42	40	37	35	
	4' 3 3/4"	55	55	51	46	42	40	37	35	33	
	4' 1 3/4"	55	53	49	44	40	37	35	33	31	
	3' 11 3/4"	55	51	46	42	40	35	33	31	31	
		Door width in inch									
		1' 1 1/8"	1' 3 3/8"	1' 5 3/8"	1' 7 3/8"	1' 9 3/8"	1' 11 3/8"	2' 1 3/8"	2' 3 3/8"	2' 5 3/8"	


Hawa Configurator

www.hawa.com/configurator →

List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

	No.
Hawa Concepta III V2 35 Push/Pull, basic set, left, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")	30996
Hawa Concepta III V2 35 Push/Pull, basic set, right, door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16")	30997


		30996	30997	No.
Set consisting of:				
	Slot nuts for hinge attachment, plastic, black	4	4	30686
	Mounting plate for hinge with height adjustment, steel	1	1	52616
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	4	52621
	Screw set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x 1/2"), steel, black, set of 3 pieces	2	2	53562
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		30805
	Running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (5/32"x5/8"), set of 16 pieces, incl. T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	30806
	Top running track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31060

Suitable slide-in set


	No.
Hawa Concepta III V2 25/35 Pull, slide-in set, left	31000
Hawa Concepta III V2 25/35 Pull, slide-in set, right	31001

		31000	31001	No.
Set consisting of:				
	Hawa Concepta III V2 25/35 Pull slide-in unit, left	1		52643
	Pull end stop bracket, steel, zinc-plated	1	1	31414
	Soft closing mechanism	1	1	31221
	Hawa Concepta III V2 Pull set of cover caps, for left-hand stop, plastic, black	1		52650
	Hawa Concepta III V2 25/35 Pull slide-in unit, right		1	52642
	Hawa Concepta III V2 Pull set of cover caps, for right-hand stop, plastic, black		1	52651

Upright

	No.
 Upright profile, for door height 1900–2700 mm (6' 2 13/16"–8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007
	Connector clips, exterior connection to cabinet, bottom, 2 pieces		53554

Guides

	No.
	25680

Accessories

	No.
	13164
	19931

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the Hawa-specific SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

	No.
Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8"), aluminum, set of 2 pieces	056.3192.072
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16"), aluminum, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.079

Aluminum, anodized

	No.
Straightening fitting for doors 2240–2850 mm (7' 4 3/16"–9' 4 7/32"), aluminum, anodized, set of 2 pieces	056.3192.071
Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8"), aluminum, anodized, set of 2 pieces	056.3192.082
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16"), aluminum, anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.080

Aluminum, black anodized

	No.
Straightening fitting for doors 2240–2850 mm (7' 4 3/16"–9' 4 7/32"), aluminum, black anodized, incl. cover caps, set of 2 pieces	056.3192.074
Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8"), aluminum, black anodized, set of 2 pieces	056.3192.075
Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16"), aluminum, black anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.081

Hawa Straightening fitting


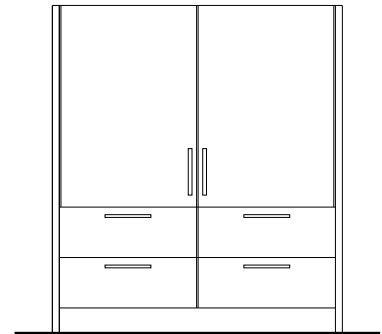
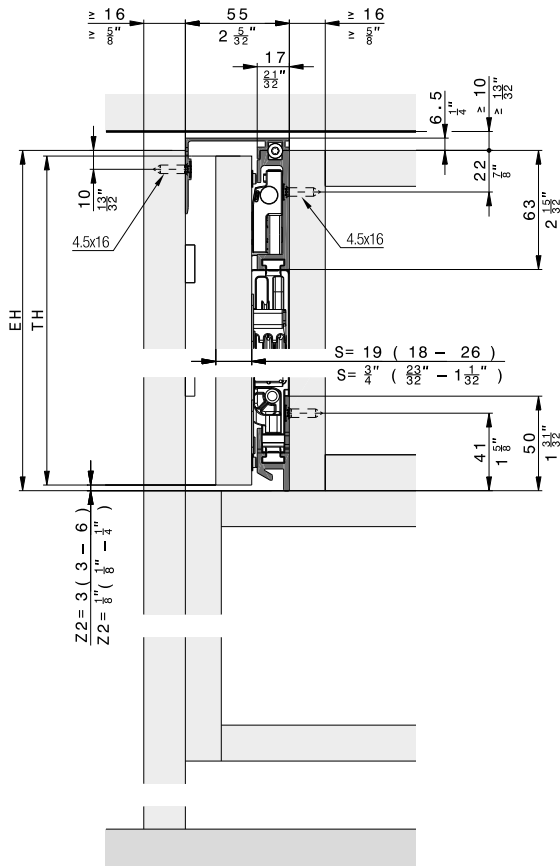
Aluminum, untreated
(without cover caps)

Aluminum, anodized
(with cover caps)



Aluminum, black anodized
(with cover caps)



Further installation examples Composed cabinet





Cabinet without base panel

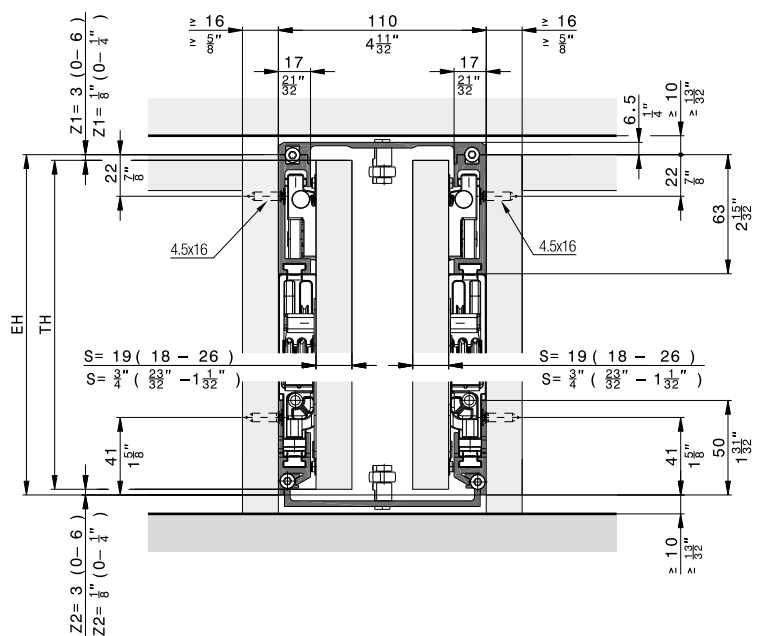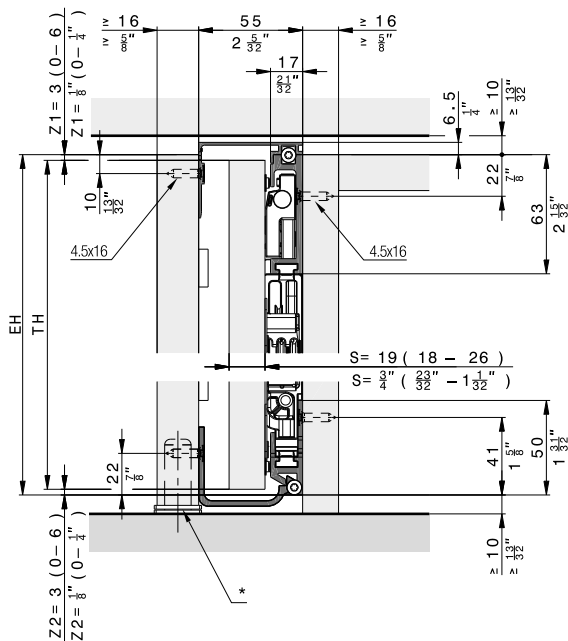


* Recommendation: Use adjustable foot

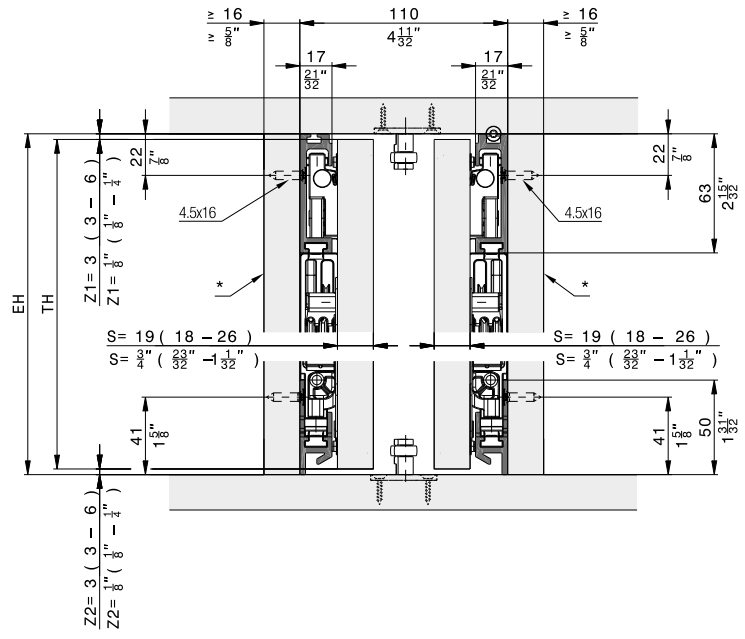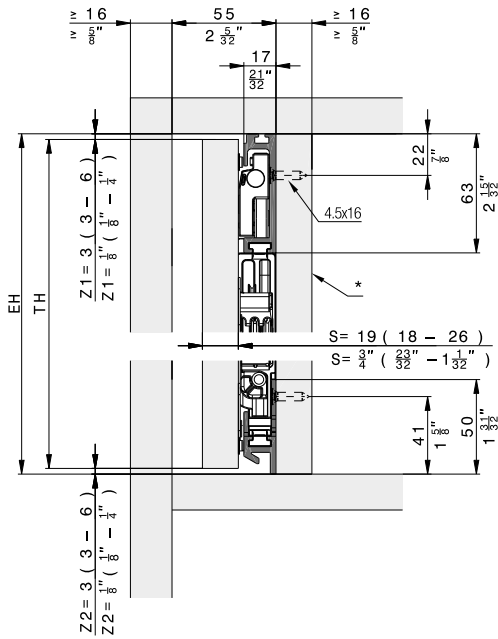Inlaid doors




* removable

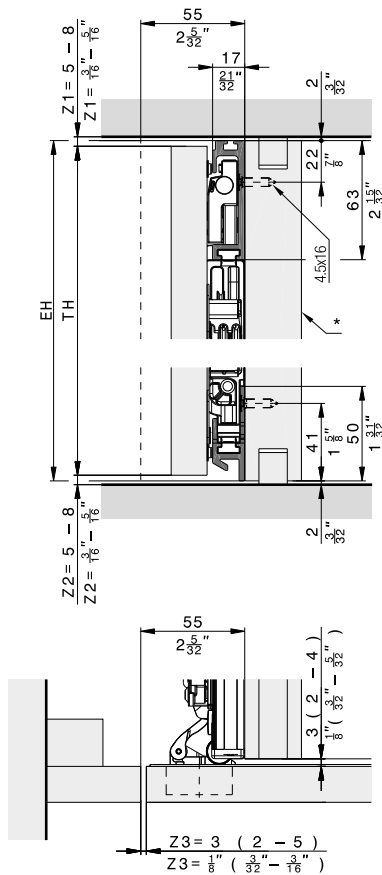Floor-to-ceiling doors



* removable

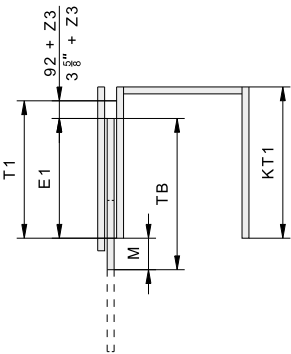
Hardware depth calculation




	mm	Inch
T1	≥ 414	≥ 1' 4 ⁵ / ₁₆ "

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₈ " + Z3 - M
E1	TB - M	TB - M
M	≥ S + 3 ≤ TB - 320	≥ S + ¹ / ₈ " ≤ TB - 1 ¹⁹ / ₃₂ "

Door flush with outer face



Protruding door

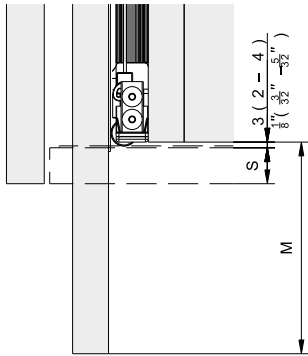


Hardware for pivoting, folding and lateral sliding in of wooden doors up to 20 kg (44 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

-  **Flexibility** Variable door dimensions, also for floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III
-  **Productivity** Easy installation thanks to high degree of pre-assembly and intuitive adjustment
-  **Aesthetics** Cabinet designs without handle – the technology remains invisible


Technical specifications

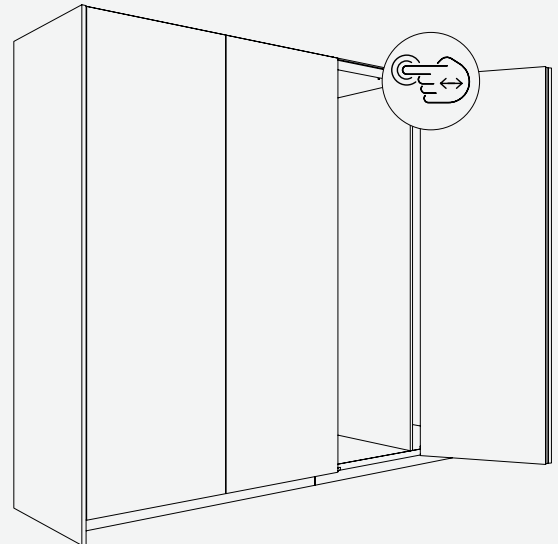-  6–20 kg (13 to 44 lbs.)
-  1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
-  440–750 mm (1' 5 5/16" to 2' 5 17/32")
-  18–26 mm (23/32" to 1 1/32")




Installation examples

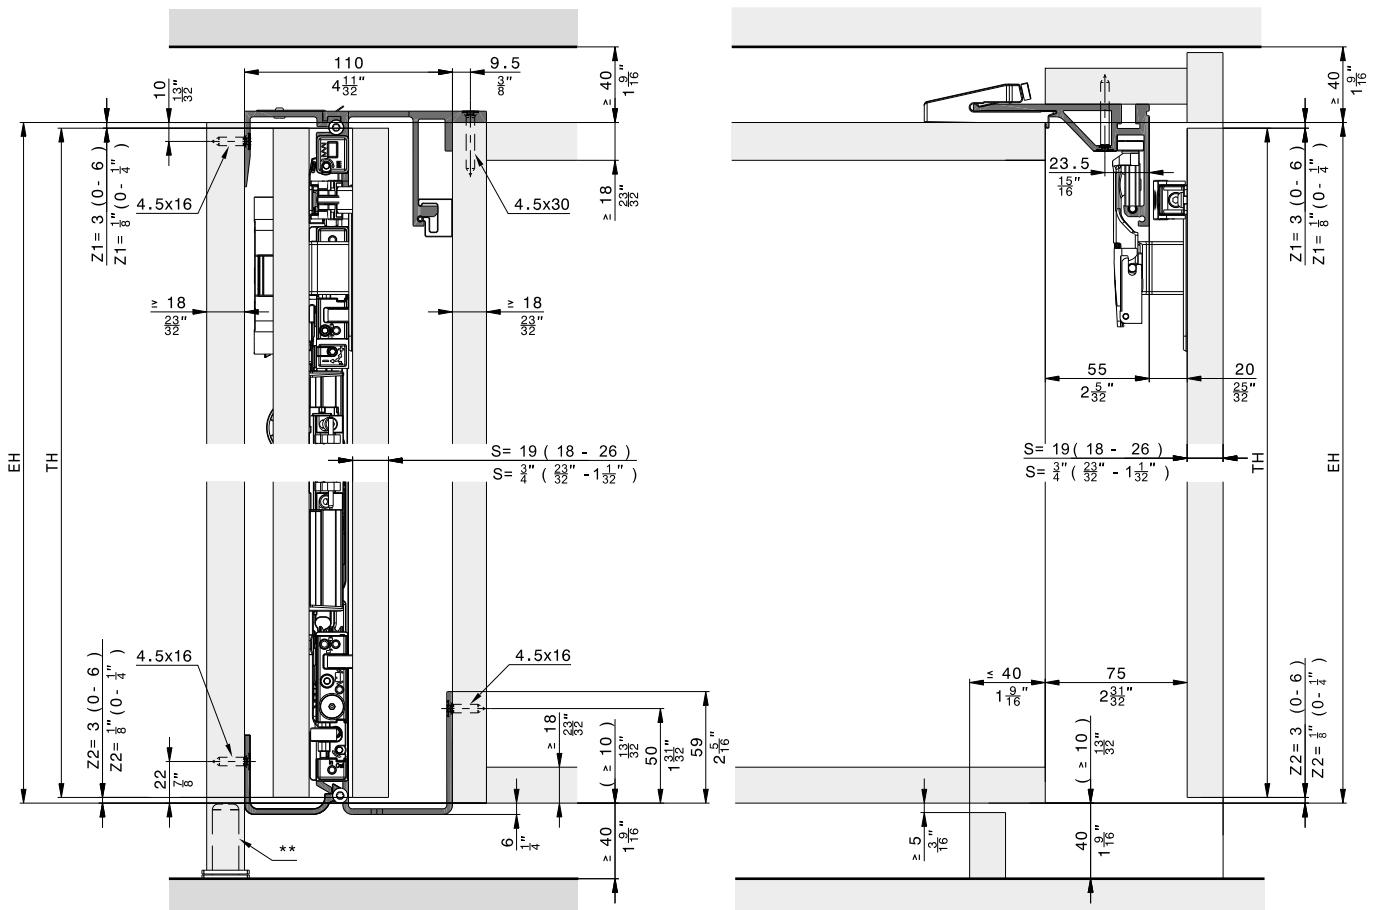Overlay door without base profile




** Recommendation: Use adjustable foot

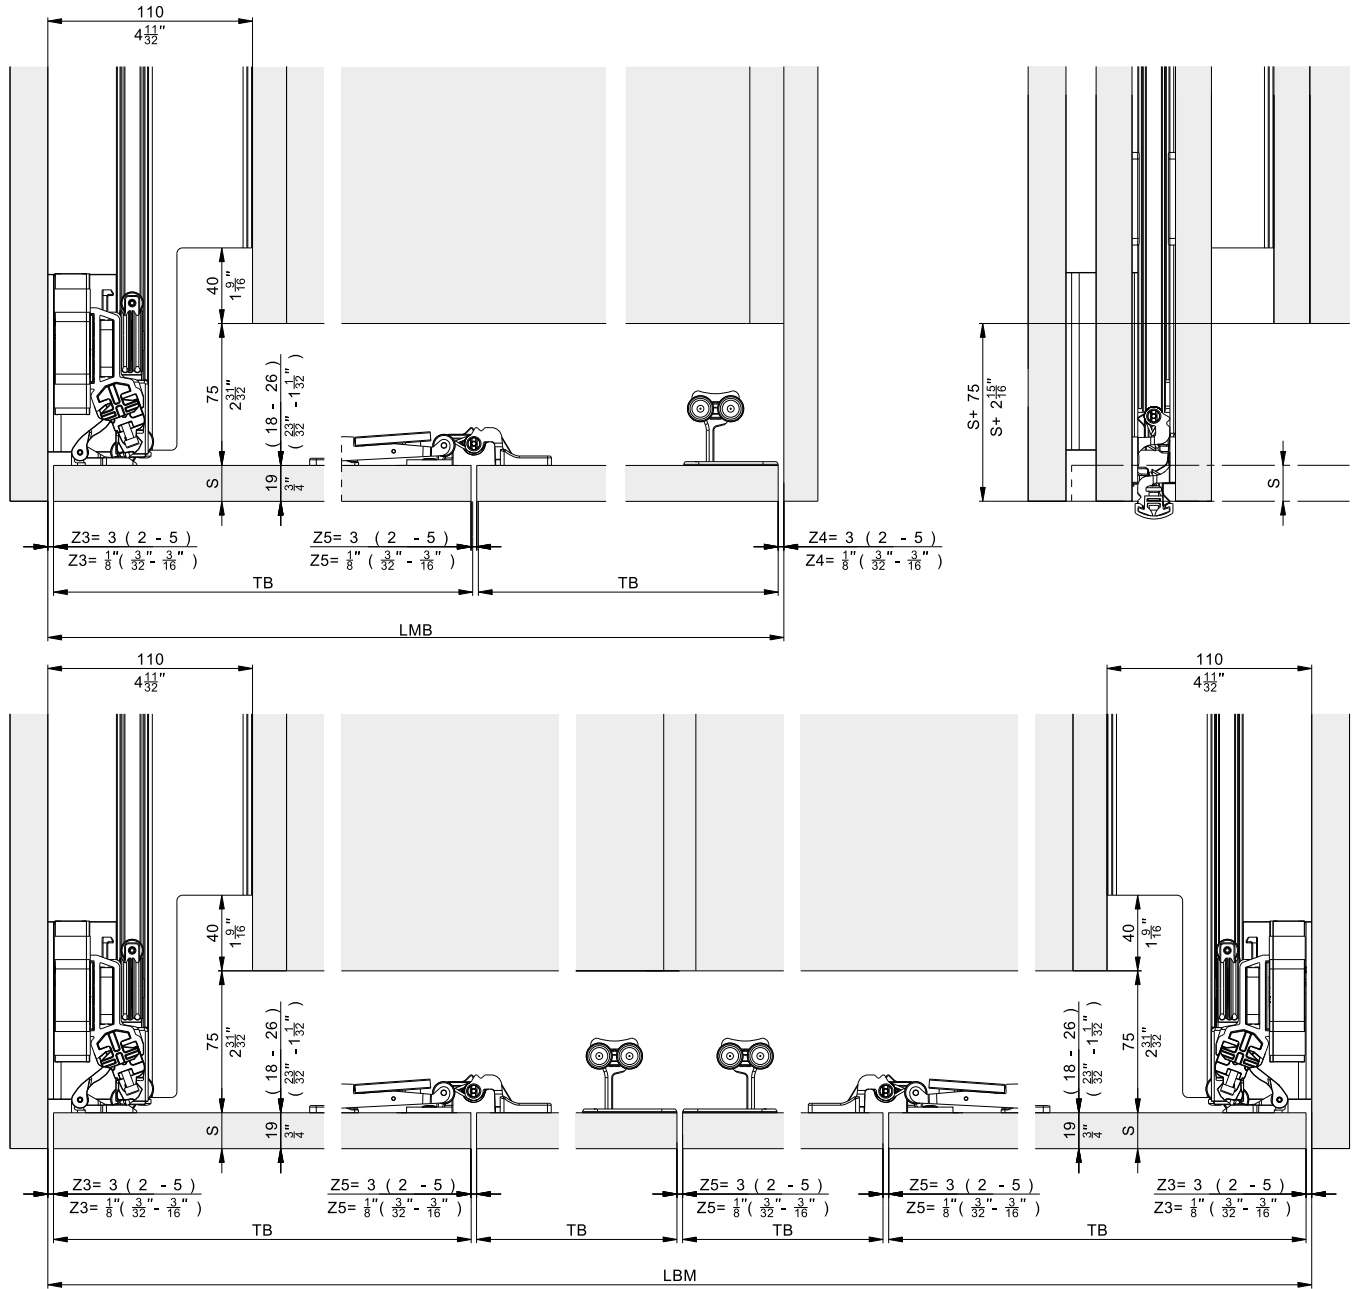Overlay door without base profile, 2 and 4 doors



Required components

for 2-door cabinets




Hawa Folding Concepta III 20 Push, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526



Hawa Folding Concepta III 20 Push, right


Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

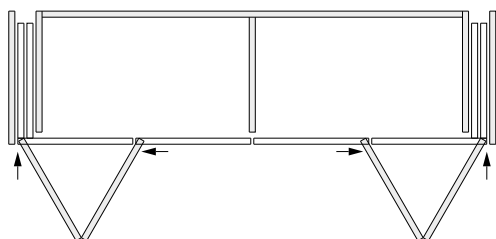for 4-door cabinets




Hawa Folding Concepta III 20 Push, left/right

Aluminum, anodized

	Pcs.	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	2	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	1	31508
Hawa Folding Concepta III 20 Push, slide-in set, right	1	31509
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	2	31519

Aluminum, black anodized


	Pcs.	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	2	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	1	31508
Hawa Folding Concepta III 20 Push, slide-in set, right	1	31509
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	2	31526

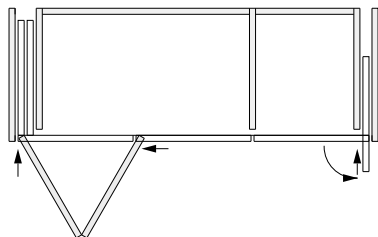for 3-door cabinets

**Hawa Folding Concepta III 20 Push, left with
Hawa Concepta III 25 Push, right**
Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005

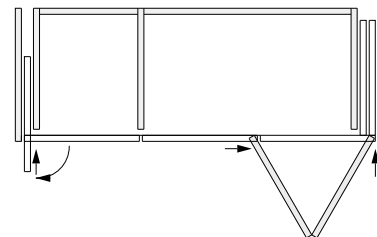Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005


**Hawa Folding Concepta III 20 Push, right with
Hawa Concepta III 25 Push, left**
Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005



Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005




Hawa Configurator
www.hawa.com/configurator →

List of individual parts, which are included in the sets

Set for 1 folding/slide-in door up to 20 kg (44 lbs.)

		No.	
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")		31504	
		31504	No.
Set consisting of:			
	Slot nuts for hinge attachment, plastic, black	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, without soft closing mechanism and closing spring, steel, nickel plated	3	31435
	Center concealed hinge, spring loaded, steel, matt nickel-plated	3	30794
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 20 pieces	1	31532
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Screw set for Push-to-open and folding door soft closing mechanism	1	31531
	Folding door soft closing mechanism	1	31064
	Push-to-open for folding door	1	31332
	Counterplate for Push-to-open folding door, plastic, black	1	31036
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
	Screw set for double running track and Connector attachment at the bottom	1	31530






Suitable slide-in set

		No.	
Hawa Folding Concepta III 20 Push, slide-in set, left		31508	
Hawa Folding Concepta III 20 Push, slide-in set, right		31509	
		31508	No.
Set consisting of:			
	Slide-in unit Hawa Folding Concepta III 20 Push, left	1	31448
	End stop bracket for Push ejector, steel, zinc-plated	1	52560
	Push ejector, plastic, black	1	52454
	Slide-in securing mechanism, plastic, black	1	30966
	Adhesive plate for Push-to-open folding door, with double-sided adhesive tape, silver-gray and black	1	52118
	Slide-in unit Hawa Folding Concepta III 20 Push, right	1	31450

Suitable 2-door and 4-door track sets, aluminum, anodized






	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting of:

		31514	31515	31518	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, anodized		1	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")			1	31343

Upright set, aluminum, anodized

	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

		31519	No.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 2200 mm (7' 2 5/8")	1	31230
	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502

Suitable 3-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

	31516	31517	No.
Set consisting of:			
	1		31339
	1	1	31341
	1		31365
	1		31336
	1		31370
	1	1	30977
	3	3	31086
	1	1	31543
	1	1	24870
	1	1	31538
	1	1	31587
		1	31340

Continued table on next column

Table continued from previous column

	Running track curve, right, aluminum, anodized	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")	1	31371

Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

		31521	31522	31525	No.
Set consisting of:					
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
	Running track curve, left, aluminum, black anodized	1		1	31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

	Cover-up pen for cut edge, black	1	1	1	52117
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, black anodized		1	1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344

Upright set, aluminum, black anodized





	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

		31526	No.
Set consisting of:			
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized, L= 2200 mm (7' 2 5/8")	1	31231
	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502

Suitable 3-door track sets, aluminum, black anodized





	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524

Set consisting of:


	31523	31524	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
 Running track curve, left, aluminum, black anodized	1		31367
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Cover-up pen for cut edge, black	1	1	52117

Continued table on next column




Table continued from previous column

 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31340
 Running track curve, right, aluminum, black anodized	1	31368
 Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
 Connector, top right, L= 788 mm (2' 7 1/32")	1	31371


Reinforcement profiles

	No.
 Reinforcement profile for running track front, 2765 mm (9' 27/32"), 4 doors, aluminum, anodized	52109
 Reinforcement profile for running track front, 2085 mm (6' 10 3/32"), 3 doors, aluminum, anodized	52110

Base profiles

	No.
 Base profile set, 2 doors, aluminum, anodized	52089
 Base profile set, 3 doors, aluminum, anodized	52090
 Base profile set, 4 doors, aluminum, anodized	52091
 Base profile set, 2 doors, aluminum, black anodized	52092
 Base profile set, 3 doors, aluminum, black anodized	52093
 Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

	No.
 Routing jig for folding hinge	52121
 Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16"), aluminum, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.079
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32"–5' 9 27/32"), aluminum, can be shortened for doors smaller than 1215 mm (3' 11 27/32"), set of 2 pieces	056.3192.073

Aluminum, anodized

		Nr.
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16"), aluminum, anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.080

Aluminum, black anodized


		No.
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16"), aluminum, black anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.081
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32"–5' 9 27/32"), aluminum, black anodized, can be shortened for doors smaller than 1215 mm (3' 11 27/32"), set of 2 pieces	056.3192.076

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the Hawa-specific SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.


www.halemeier.de

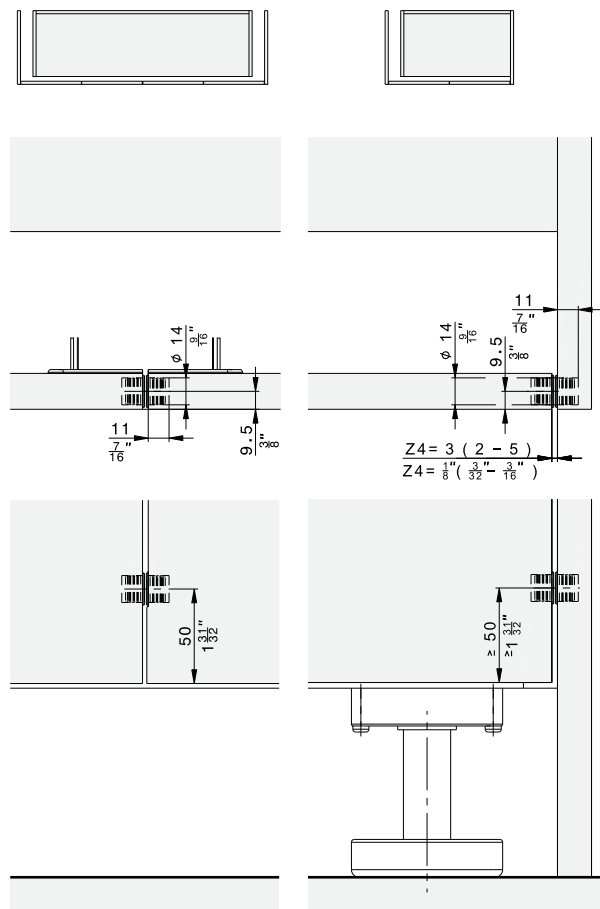Centering parts



Further installation examples

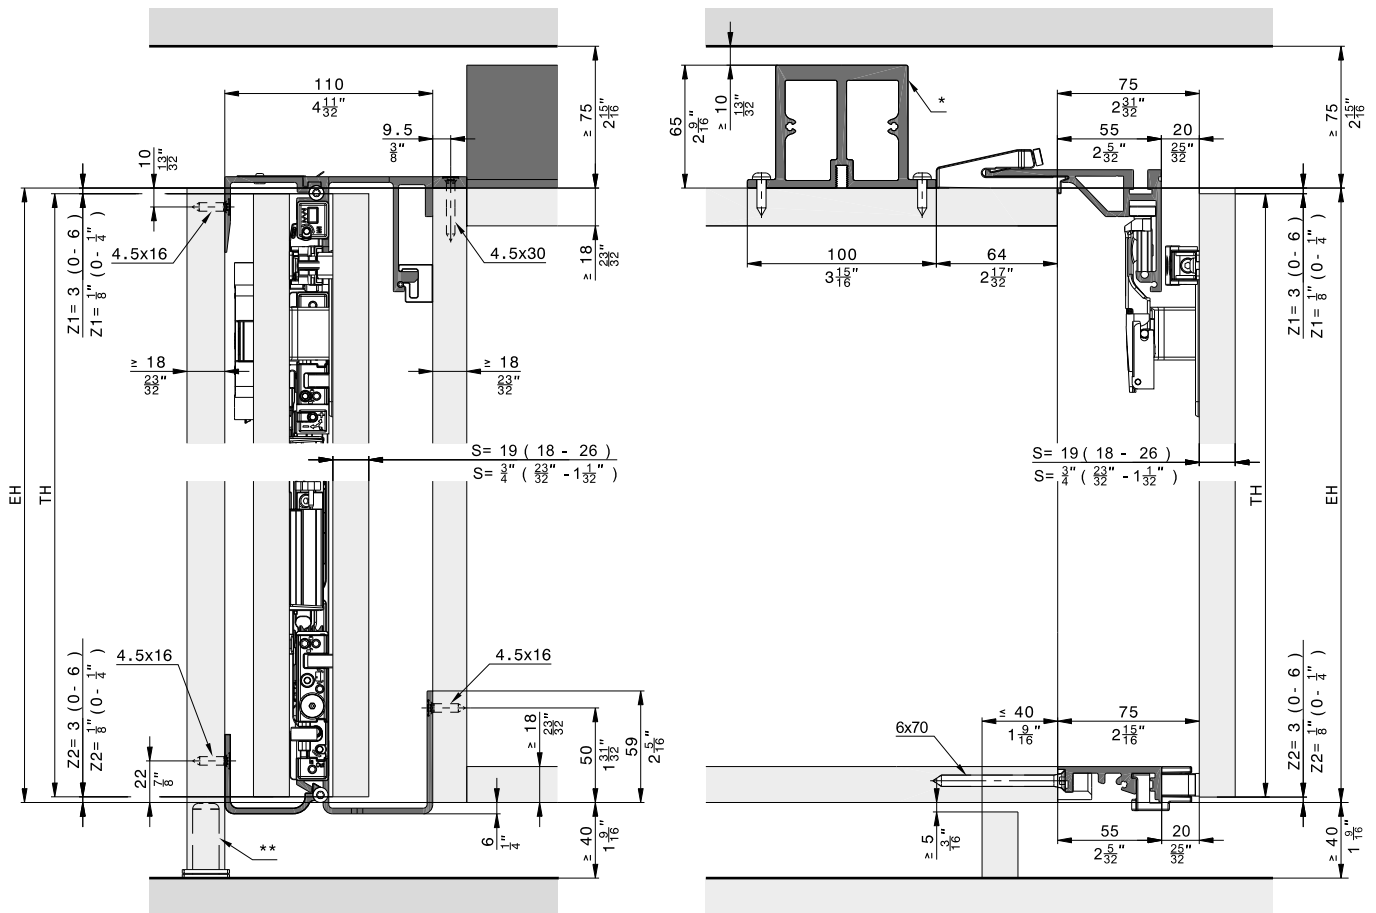
Overlay door with base profile, 2 and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls

**** Recommendation: Use adjustable foot**

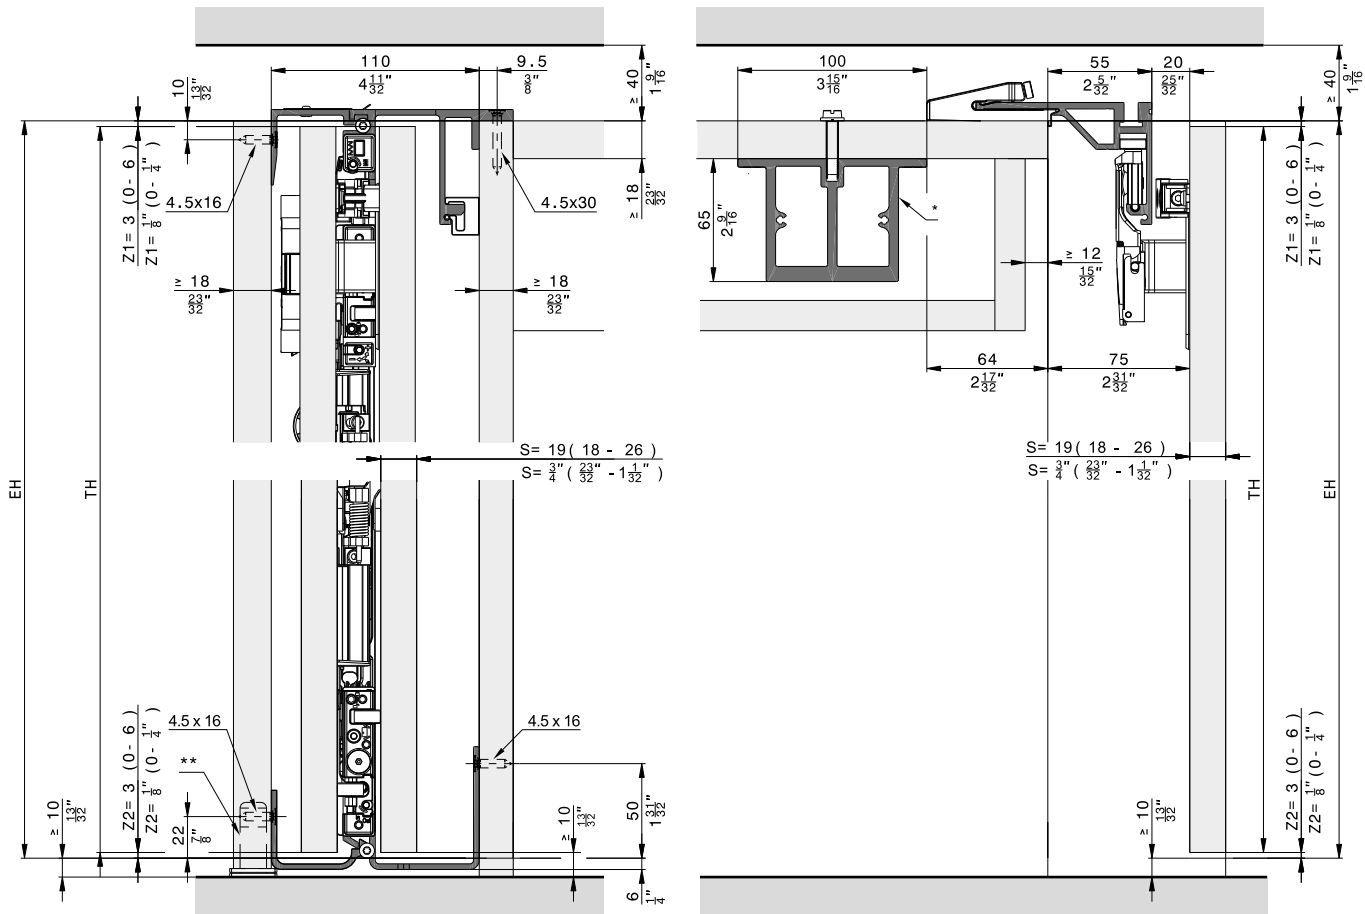
Floor-to-ceiling doors without base panels,



* Reinforcement profile for 3-door and 4-door systems without separating walls


** Recommendation: Use adjustable foot

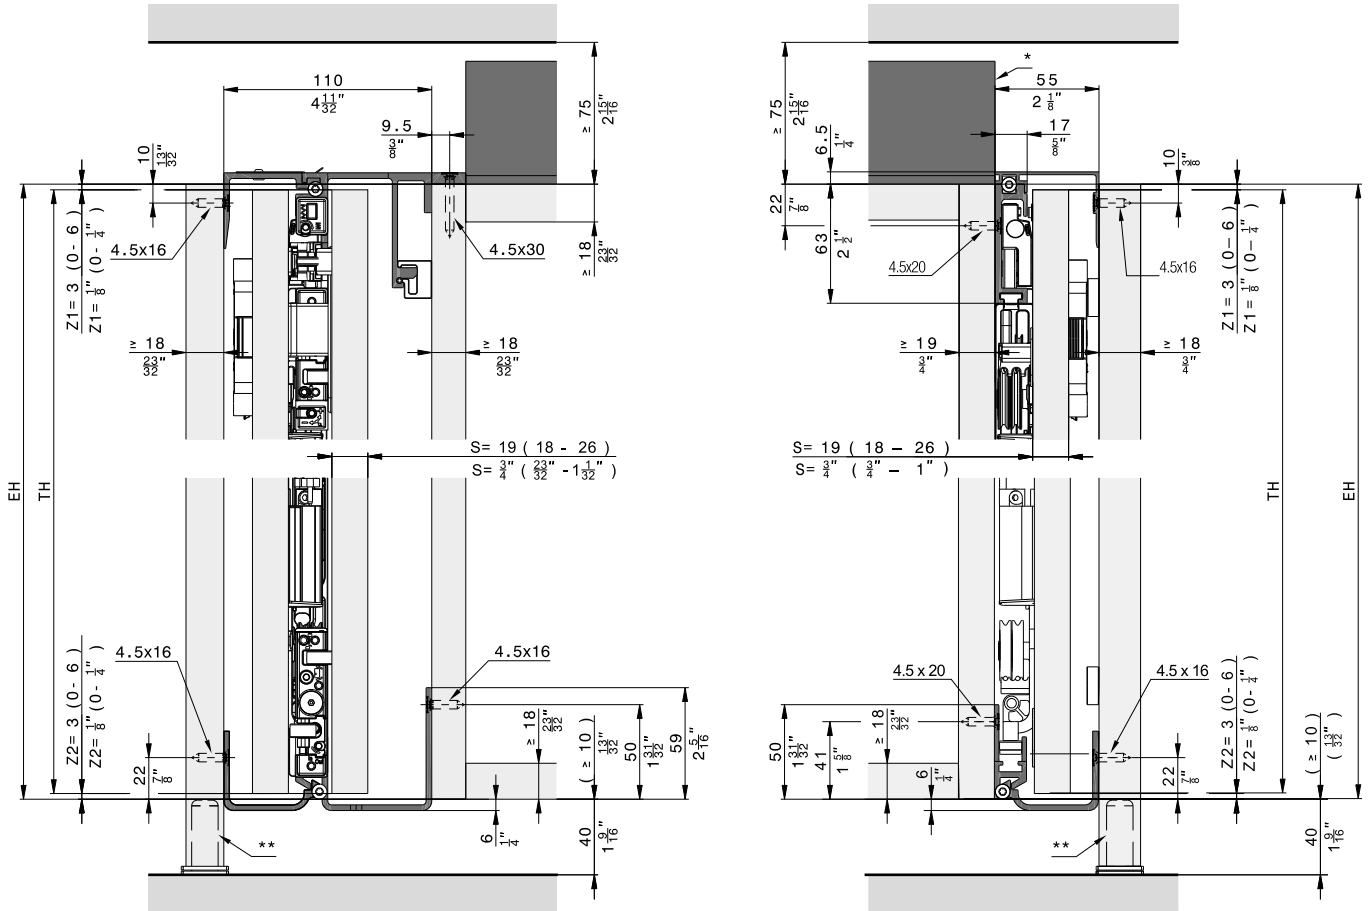Overlay door without base profile, 3 doors






* Reinforcement profile for 3-door and 4-door systems without separating walls

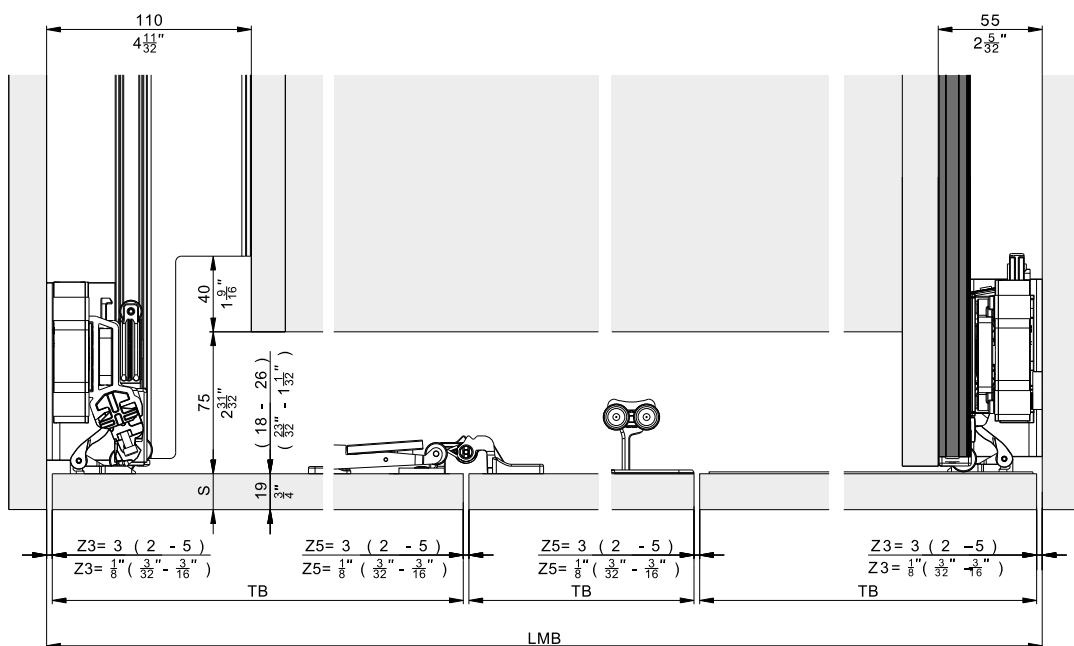** Recommendation: Use adjustable foot




Composed cabinet

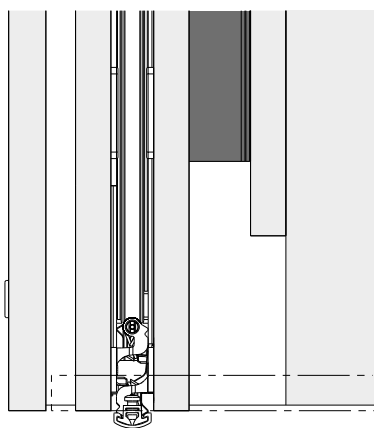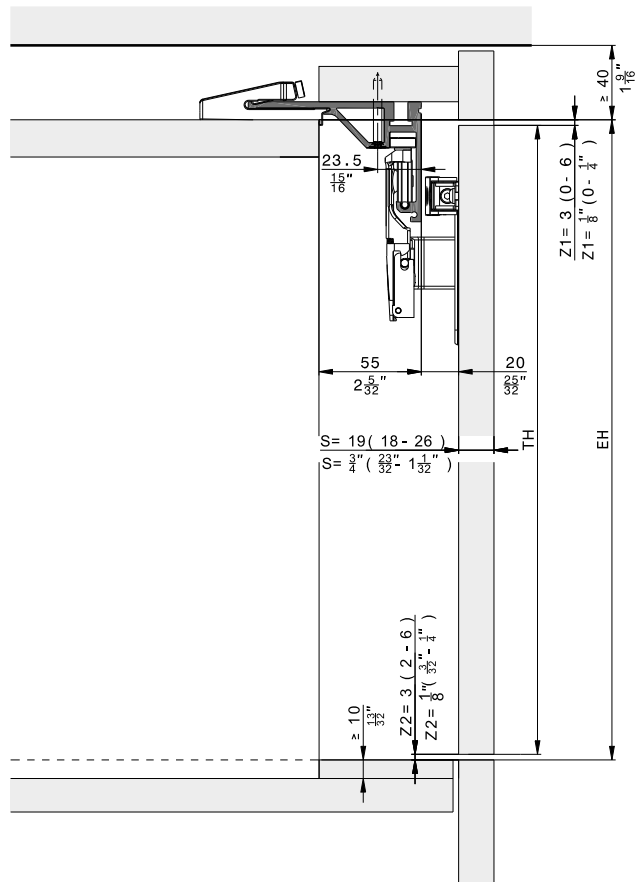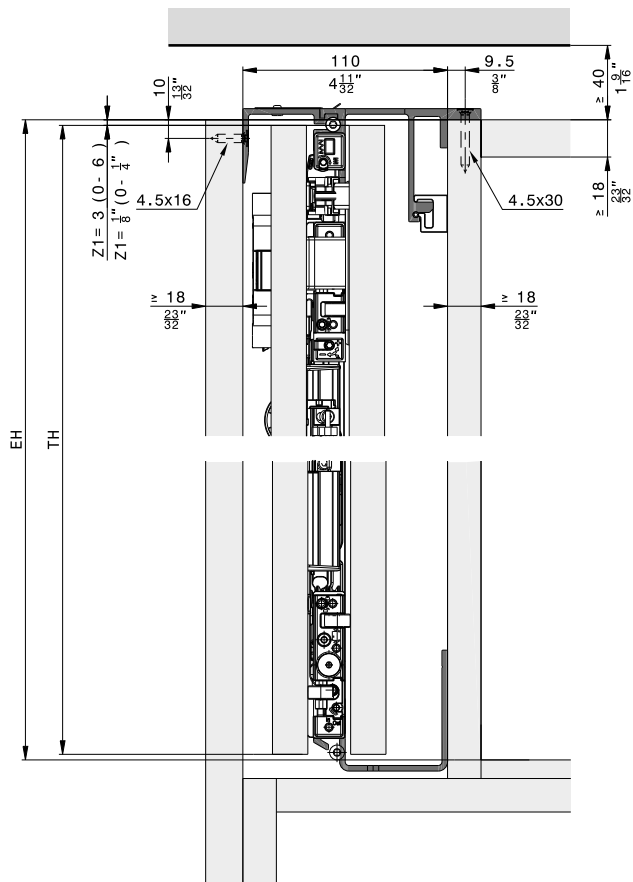


Hardware depth calculation


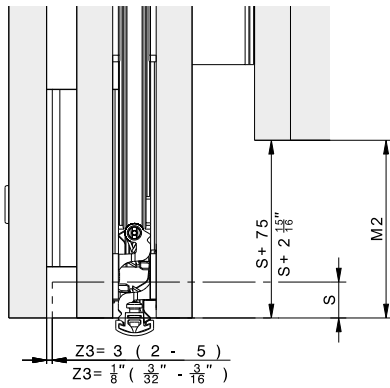
Flush door



Protruding door

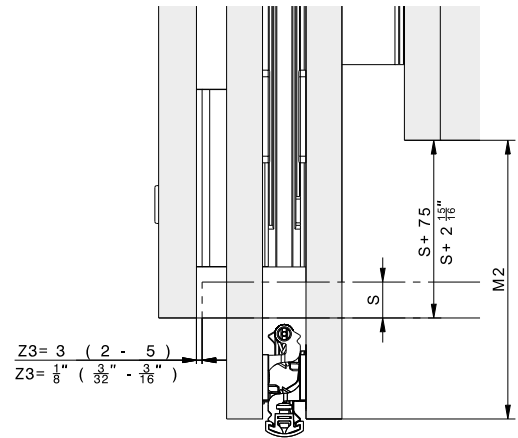

	mm	Inch
T2	TB + 92 + Z3 - M2	TB + 3 $\frac{5}{8}$ " + Z3 - M2
KT2	≥ T2	≥ T2
E2	TB - M2	TB - M2
M2 min.	≥ S + 75	≥ S + 2 $\frac{15}{16}$ "
M2 max.	≤ TB - 250	≤ TB - 9 $\frac{27}{32}$ "

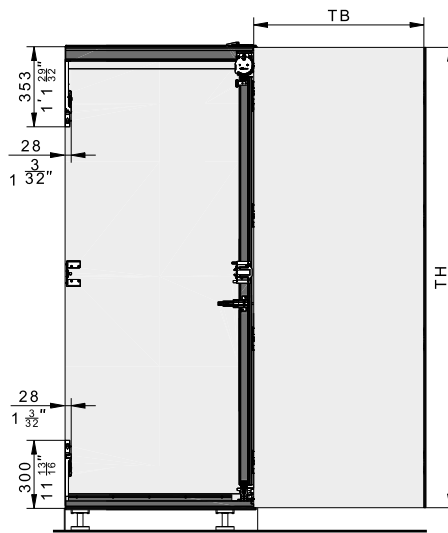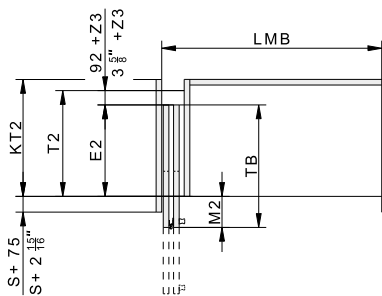

- S = Door thickness
- Z = Gap size
- E2 = Slide-in depth
- T2 = Hardware depth
- TB = Door width
- TH = Door height
- KT2 = Cabinet depth
- LMB = Inside clearance
- M2 = Door projection over cabinet


Hardware for pivoting, folding and lateral sliding in of wooden doors up to 20 kg (44 lbs.). Uniform, flush front design with even gap pattern. Invisible technology. Pull version with handle.

Product highlights

- Flexibility** Variable door dimensions, also for floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III
- Productivity** Easy installation thanks to high degree of pre-assembly and intuitive adjustment
- Comfort** Opening and closing with very little effort – one hand is enough


Technical specifications

	6–20 kg (13 to 44 lbs.)
	1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
	440–750 mm (1' 5 5/16" to 2' 5 17/32")
	18–26 mm (23/32" to 1 1/32")

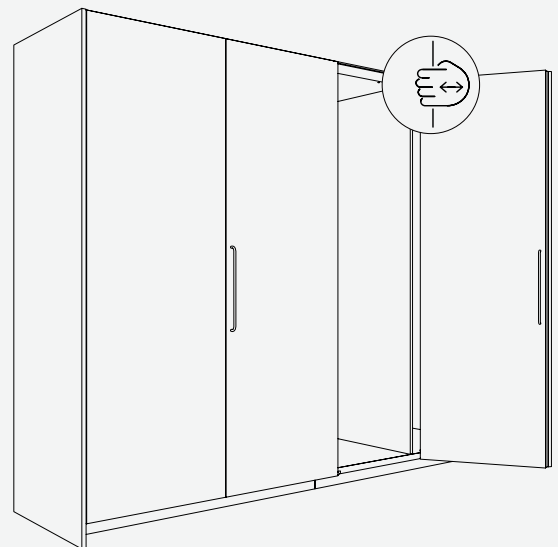


Installation examples

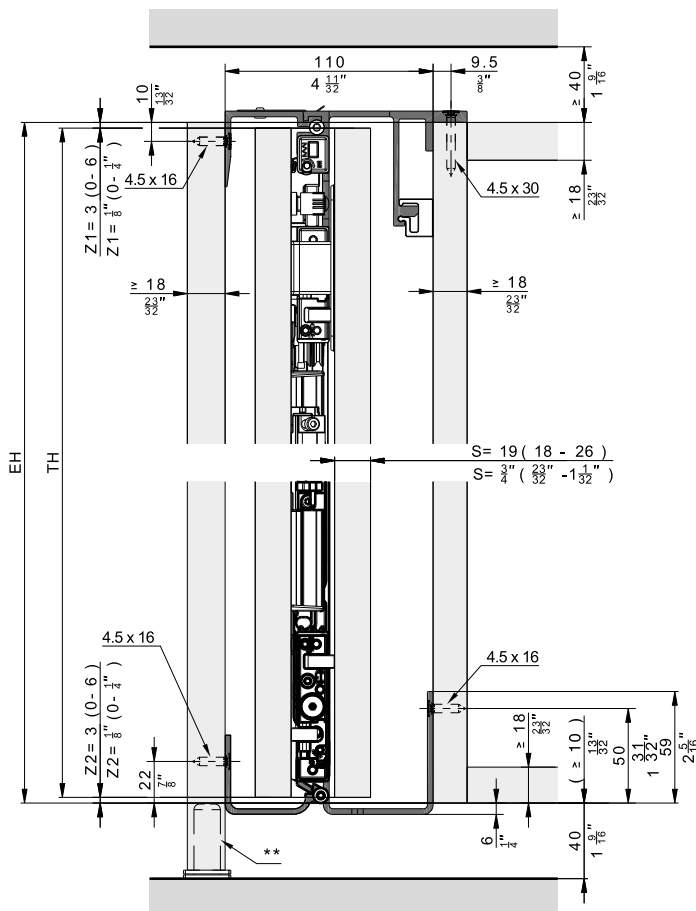
Overlay door without base profile



** Recommendation: Use adjustable foot

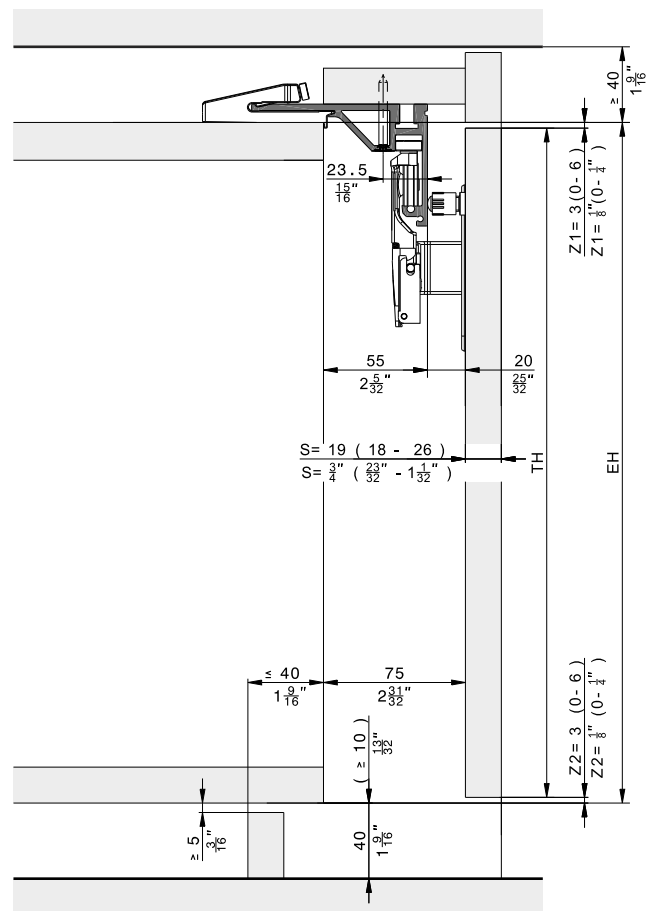


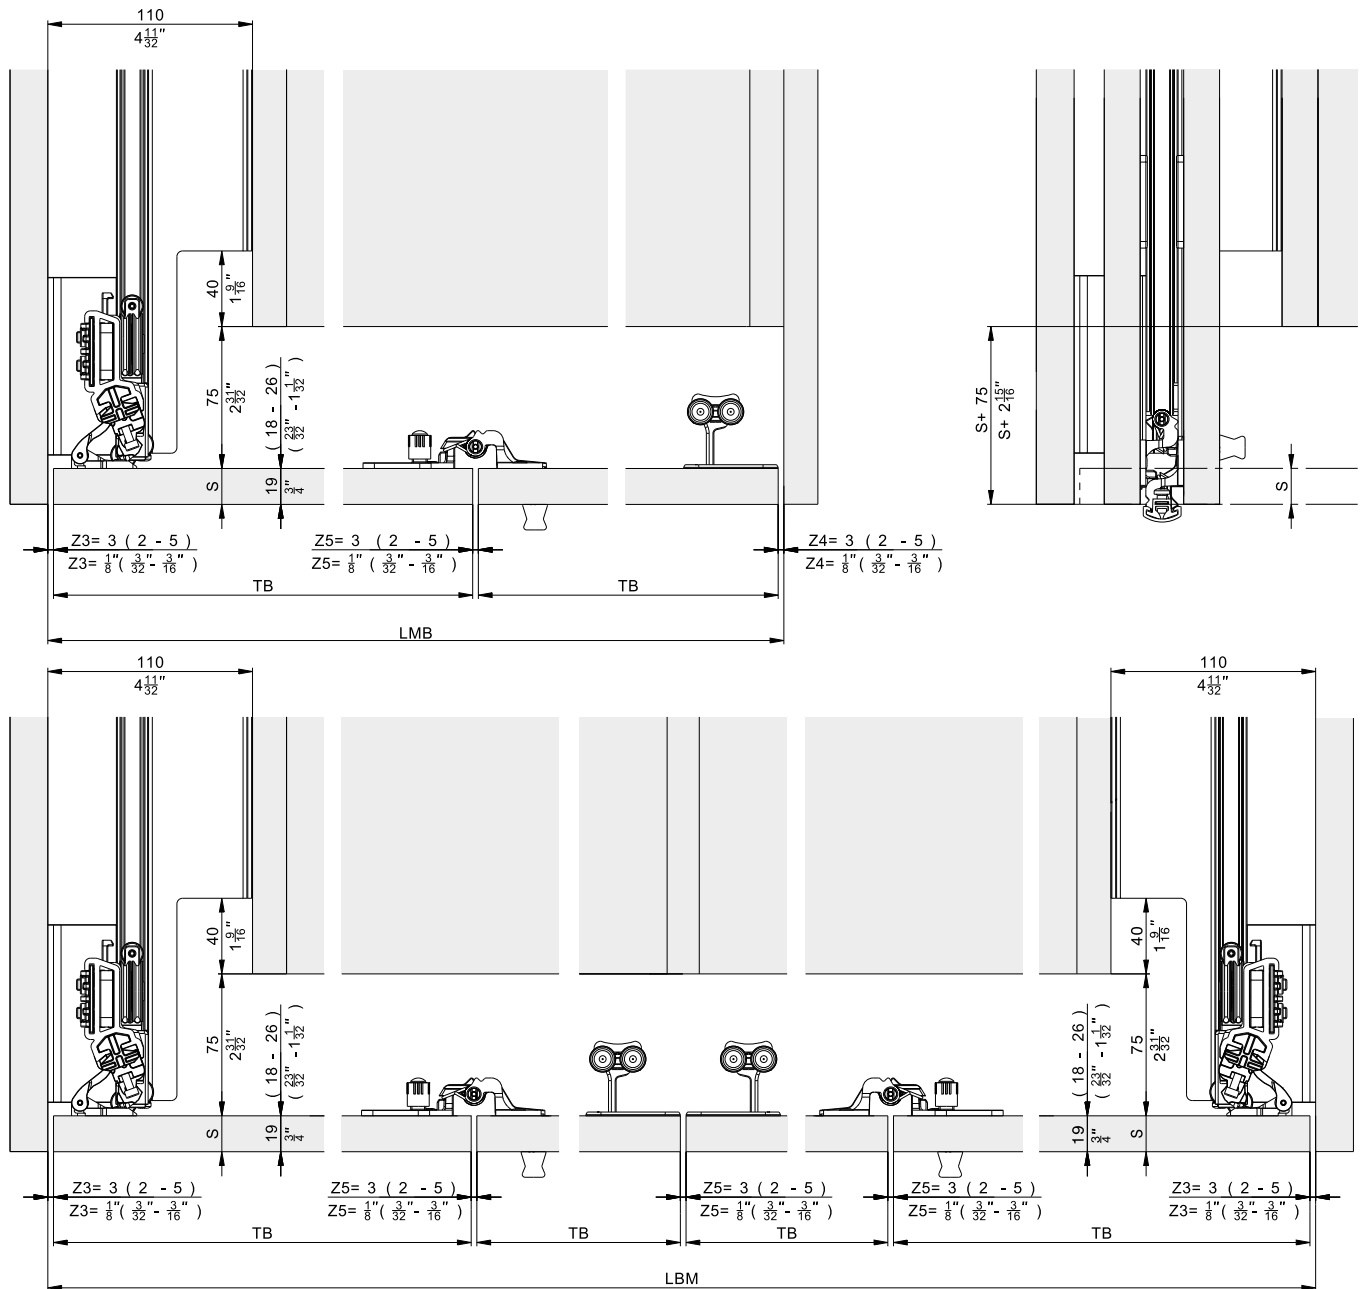Overlay door without base profile, 2 and 4 doors



Required components

for 2-door cabinets




Hawa Folding Concepta III 20 Pull, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526



Hawa Folding Concepta III 20 Pull, right


Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

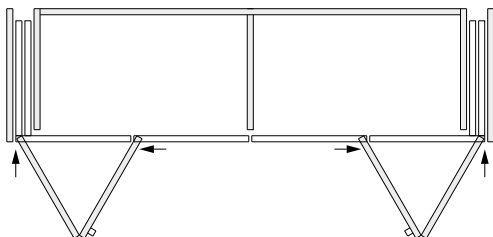for 4-door cabinets




Hawa Folding Concepta III 20 Pull, left/right

Aluminum, anodized

	Pcs.	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	2	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	2	31519

Aluminum, black anodized


	Pcs.	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	2	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	2	31526

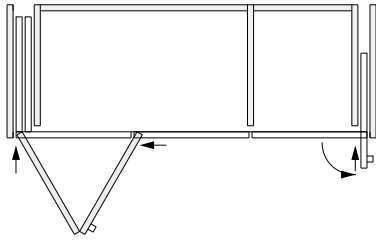for 3-door cabinets

**Hawa Folding Concepta III 20 Pull, left with
Hawa Concepta III 25 Pull, right**
Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005

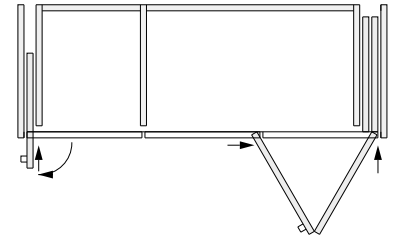Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005


**Hawa Folding Concepta III 20 Pull, right with
Hawa Concepta III 25 Pull, left**
Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005


Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005




Hawa Configurator
www.hawa.com/configurator →

List of individual parts, which are included in the sets

Set for 1 folding/slide-in door up to 20 kg (44 lbs.)

		No.	
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")		31506	
		31506	No.
Set consisting of:			
	Slot nuts for hinge attachment, plastic, black	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	31070
	Center concealed hinge, not spring loaded, steel, matt nickel-plated	3	31362
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 20 pieces	1	31532
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Soft closing mechanism	1	31222
	Stop buffer adjustable, plastic, anthracite	1	31550
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
	Screw set for double running track and Connector attachment at the bottom	1	31530







Suitable slide-in set

		No.	
Hawa Folding Concepta III 20/25 Pull, slide-in set, left		31512	
Hawa Folding Concepta III 20/25 Pull, slide-in set, right		31513	
		31512	No.
Set consisting of:			
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, left	1	31004
	Pull end stop bracket, steel, zinc-plated	1	31541
	Slide-in securing mechanism, plastic, black	1	30966
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, right	1	31046

Suitable 2-door and 4-door track sets, aluminum, anodized





	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting of:

		31514	31515	31518	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, anodized		1	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right, L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")			1	31343

Upright set, aluminum, anodized








	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

		31519	No.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 2200 mm (7' 2 5/8")	1	31230
	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502

Suitable 3-door track sets, aluminum, anodized


	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

Set consisting of:

	31516	31517	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, anodized, L= 1954 mm (6' 4 15/16")	1	1	31341
 Running track curve, left, aluminum, anodized	1		31365
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31340

Continued table on next column

Table continued from previous column

	Running track curve, right, aluminum, anodized	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")	1	31371

Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

		31521	31522	31525	No.
Set consisting of:					
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
	Running track curve, left, aluminum, black anodized	1		1	31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

	Cover-up pen for cut edge, black	1	1	1	52117
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, black anodized		1	1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344

Upright set, aluminum, black anodized











	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

		31526	No.
Set consisting of:			
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized, L= 2200 mm (7' 2 5/8")	1	31231
	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502

Suitable 3-door track sets, aluminum, black anodized




	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524

Set consisting of:



	31523	31524	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
 Running track curve, left, aluminum, black anodized	1		31367
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Cover-up pen for cut edge, black	1	1	52117

Continued table on next column




Table continued from previous column

 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31340
 Running track curve, right, aluminum, black anodized	1	31368
 Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
 Connector, top right, L= 788 mm (2' 7 1/32")	1	31371


Reinforcement profiles

	No.
 Reinforcement profile for running track front, 2765 mm (9' 27/32"), 4 doors, aluminum, anodized	52109
 Reinforcement profile for running track front, 2085 mm (6' 10 3/32"), 3 doors, aluminum, anodized	52110

Base profiles

	No.
 Base profile set, 2 doors, aluminum, anodized	52089
 Base profile set, 3 doors, aluminum, anodized	52090
 Base profile set, 4 doors, aluminum, anodized	52091
 Base profile set, 2 doors, aluminum, black anodized	52092
 Base profile set, 3 doors, aluminum, black anodized	52093
 Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

	No.
 Routing jig for folding hinge	52121
 Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Straightening fitting

→ Details under accessories frame page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32"– 7' 5 9/16"), aluminum, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.079
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32"– 5' 9 27/32"), aluminum, can be shortened for doors smaller than 1215 mm (3' 11 27/32"), set of 2 pieces	056.3192.073

Aluminum, anodized

		Nr.
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32"– 7' 5 9/16"), aluminum, anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.080

Aluminum, black anodized


		No.
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32"– 7' 5 9/16"), aluminum, black anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.081
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32"– 5' 9 27/32"), aluminum, black anodized, can be shortened for doors smaller than 1215 mm (3' 11 27/32"), set of 2 pieces	056.3192.076

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the Hawa-specific SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.


www.halemeier.de

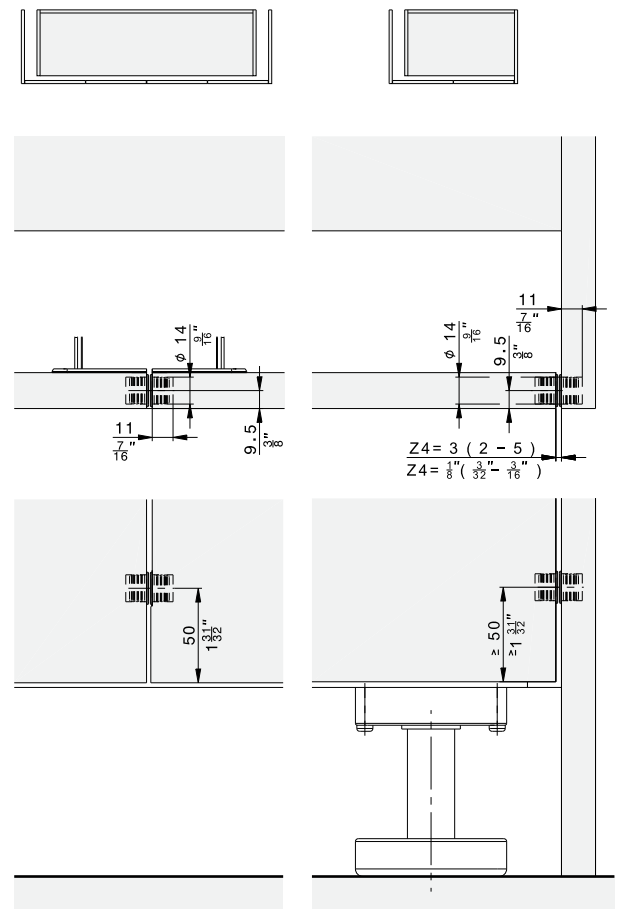Centering parts



Further installation examples


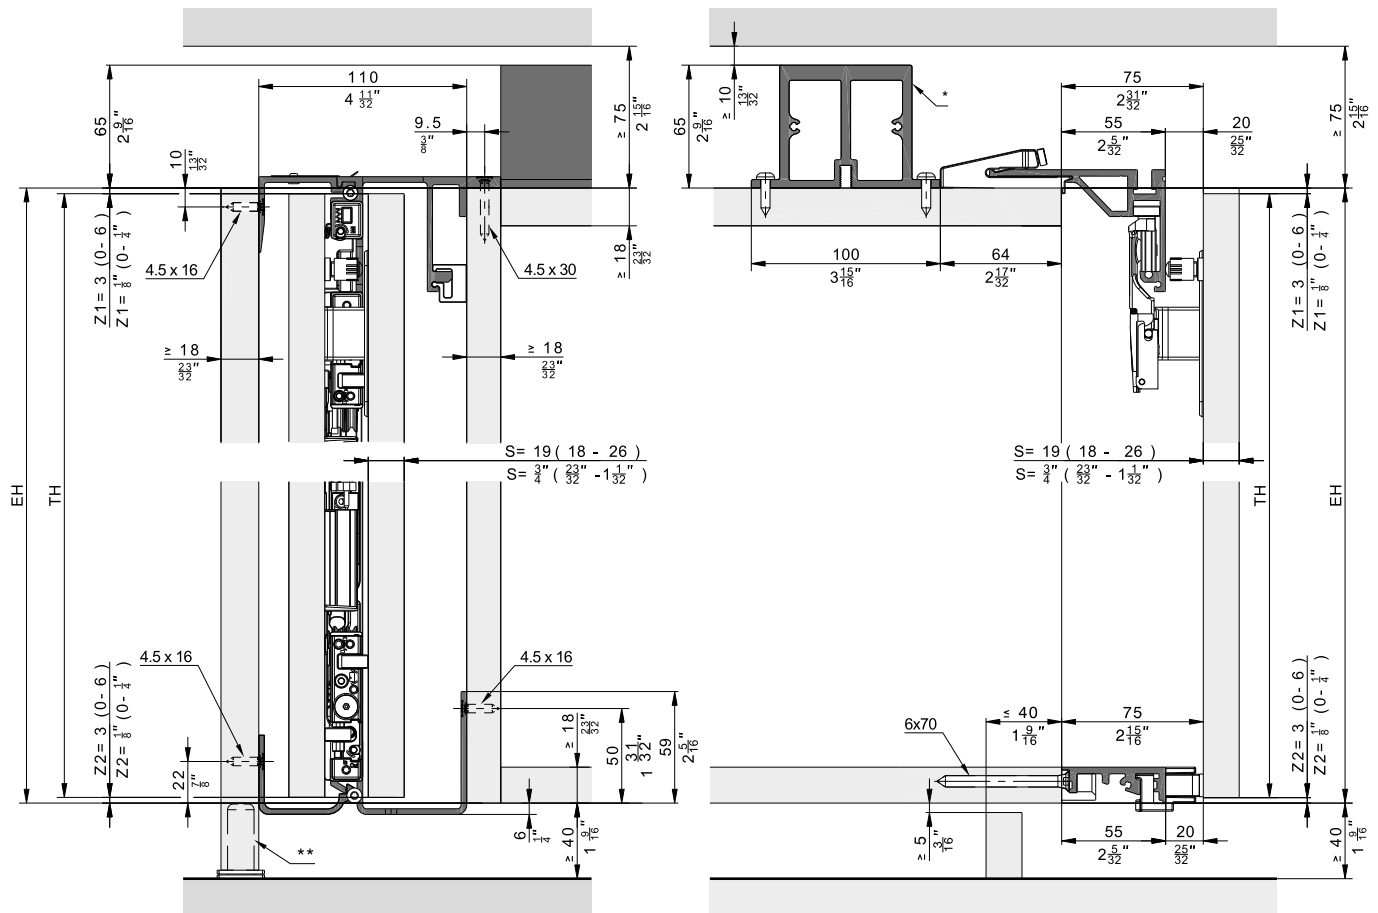
Overlay door with base profile, 2 and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls

** Recommendation: Use adjustable foot

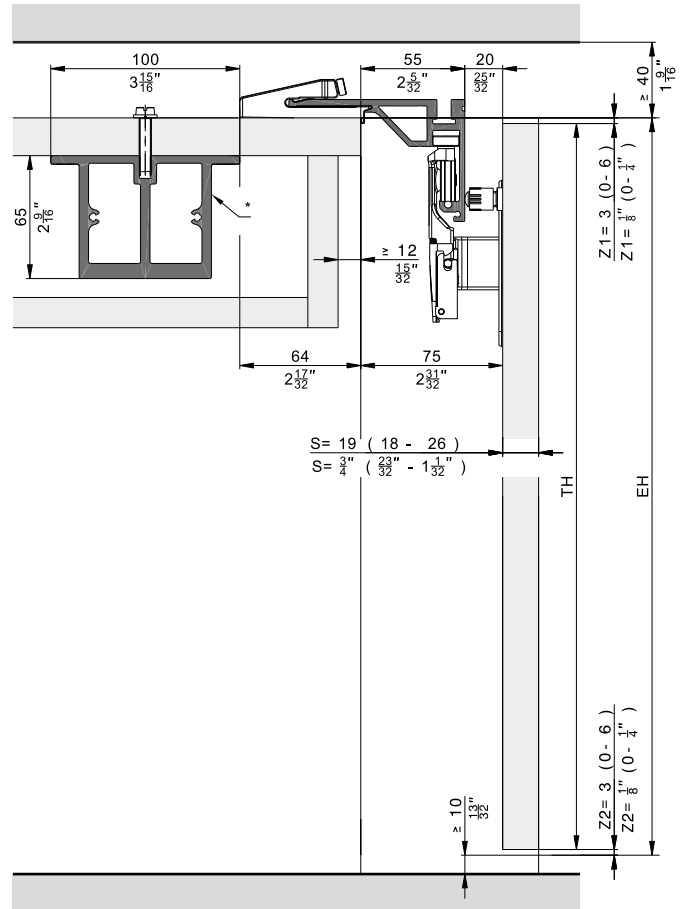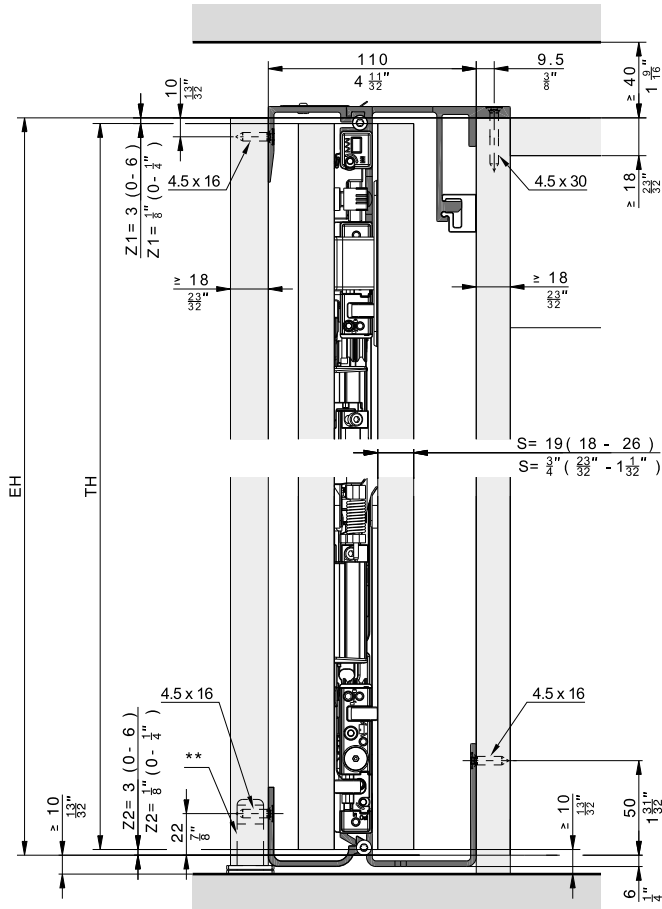
Floor-to-ceiling doors without base panels,
2 doors and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls


** Recommendation: Use adjustable foot

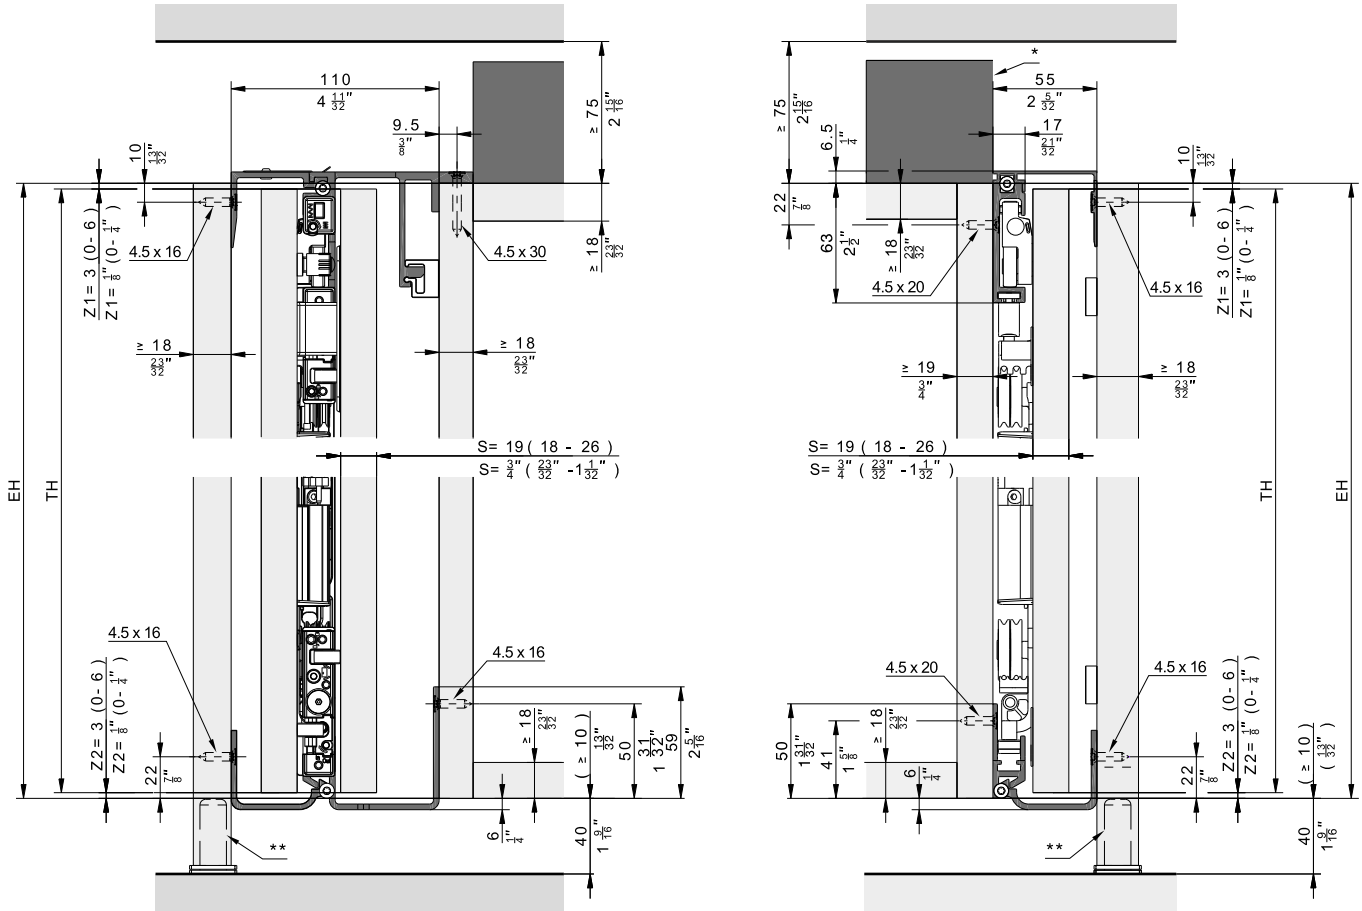Overlay door without base profile, 3 doors






* Reinforcement profile for 3-door and 4-door systems without separating walls



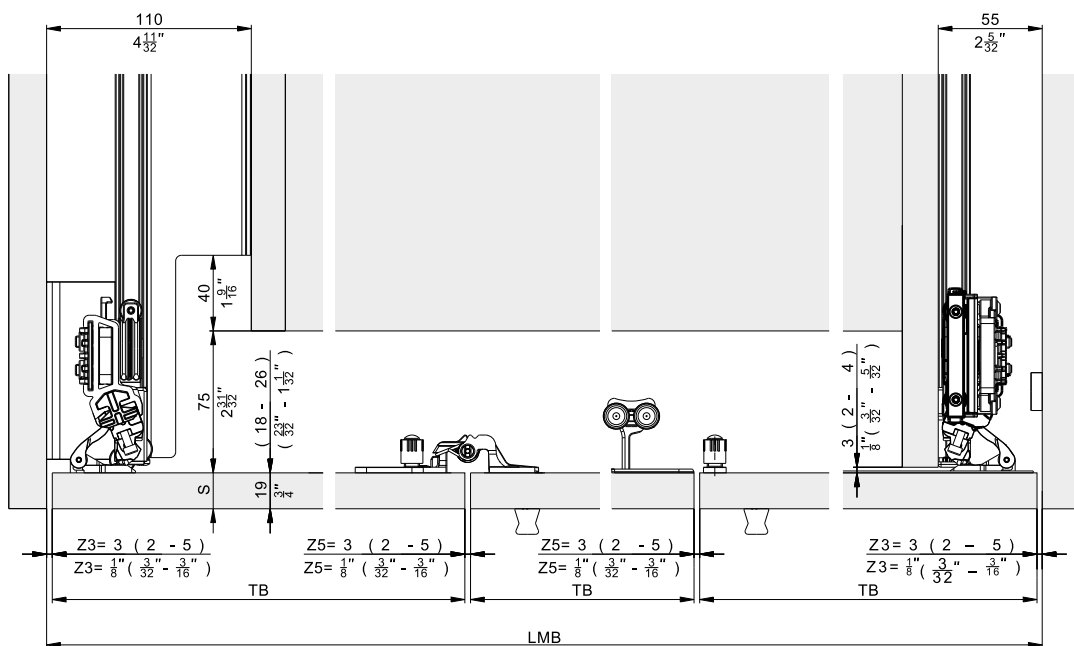
** Recommendation: Use adjustable foot



Composed cabinet

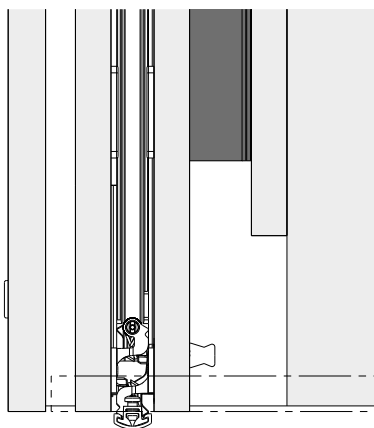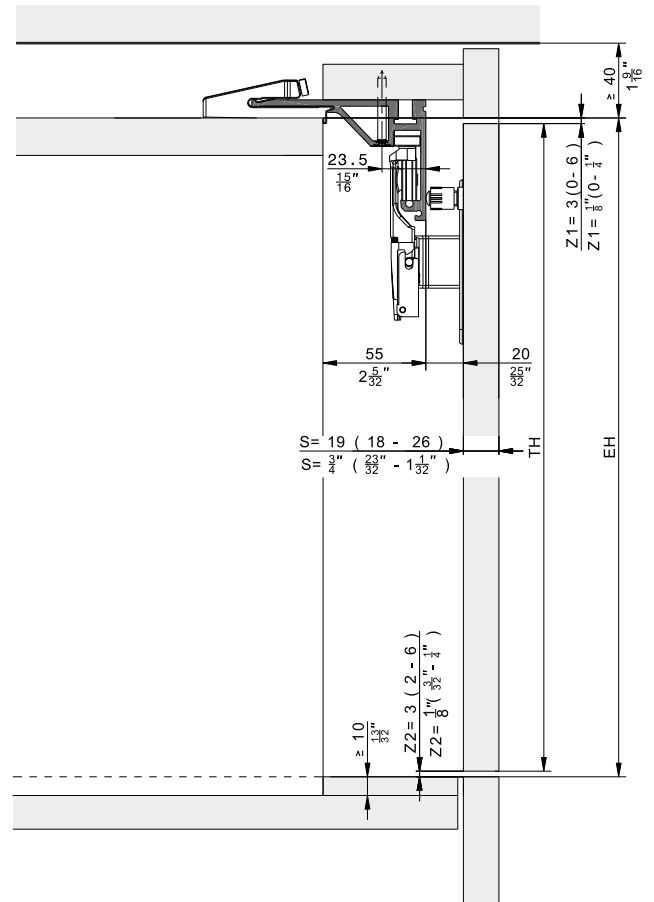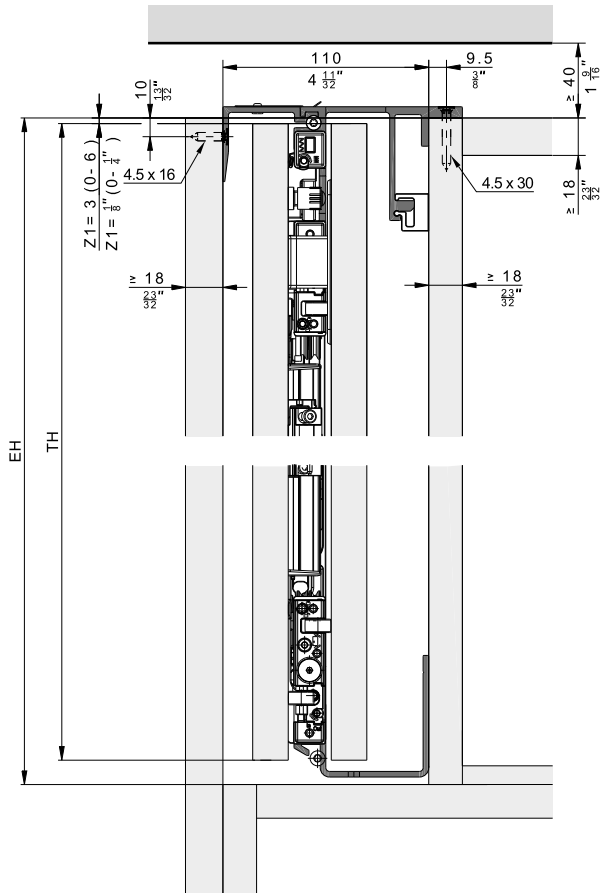

Composed cabinet

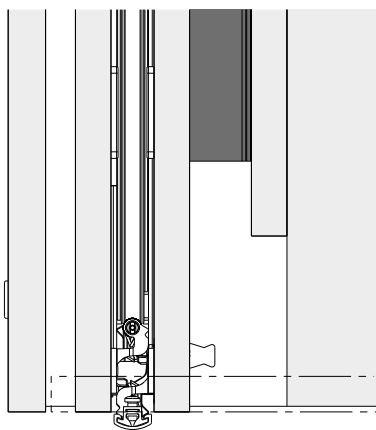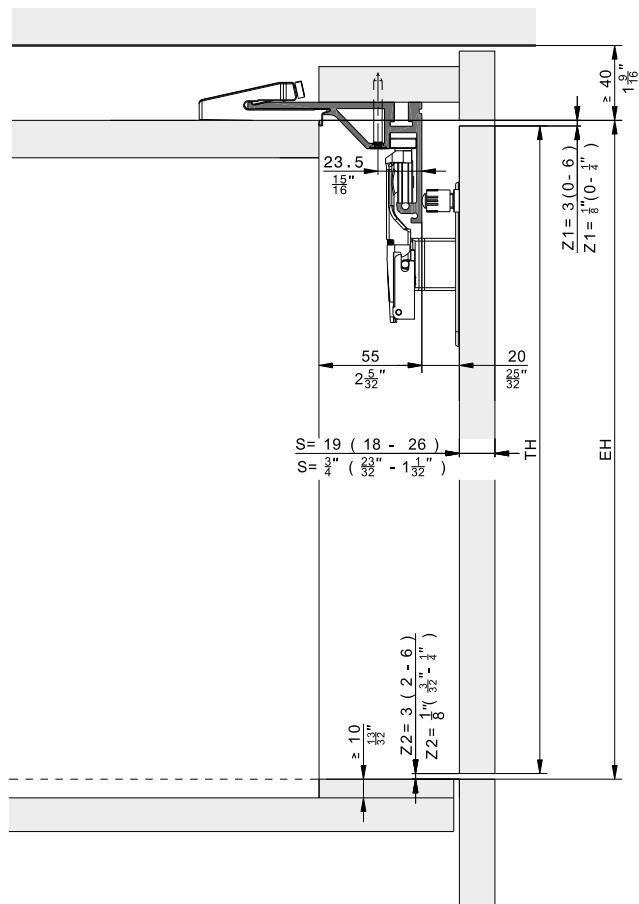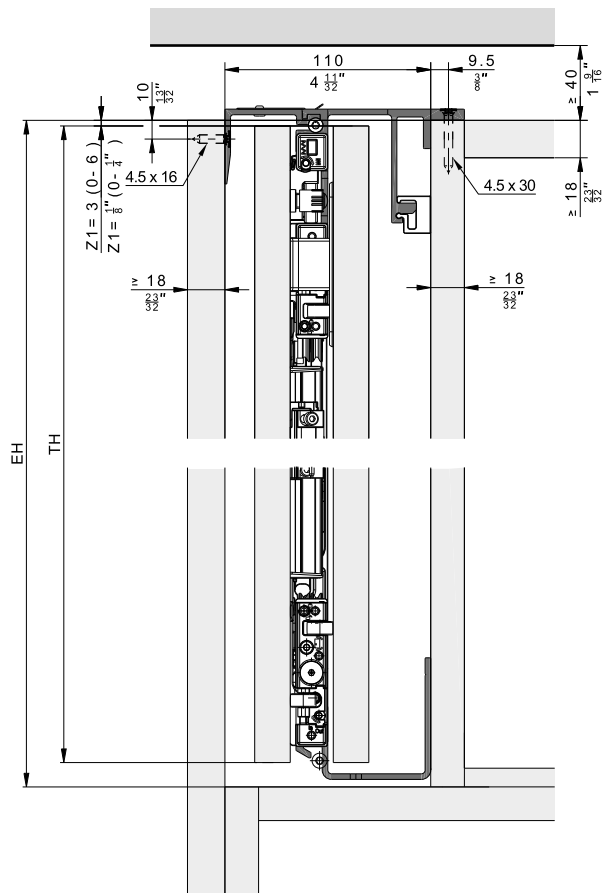

Hardware for pivoting, folding and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights



Flexibility

Variable door dimensions, also for floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III



Productivity

Easy installation thanks to high degree of pre-assembly and intuitive adjustment



Aesthetics

Cabinet designs without handle – the technology remains invisible

Technical specifications



10–25 kg (22 to 55 lbs.)



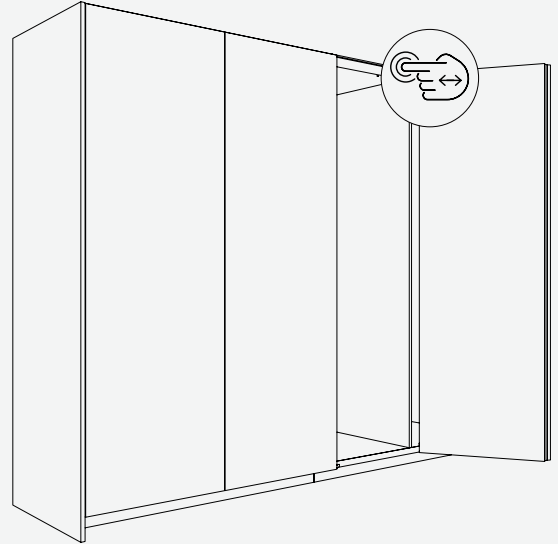
1900–2700 mm (6' 2 13/16" to 8' 10 5/16")



440–750 mm (1' 5 5/16" to 2' 5 17/32")





18–26 mm (23/32" to 1 1/32")




Installation examples

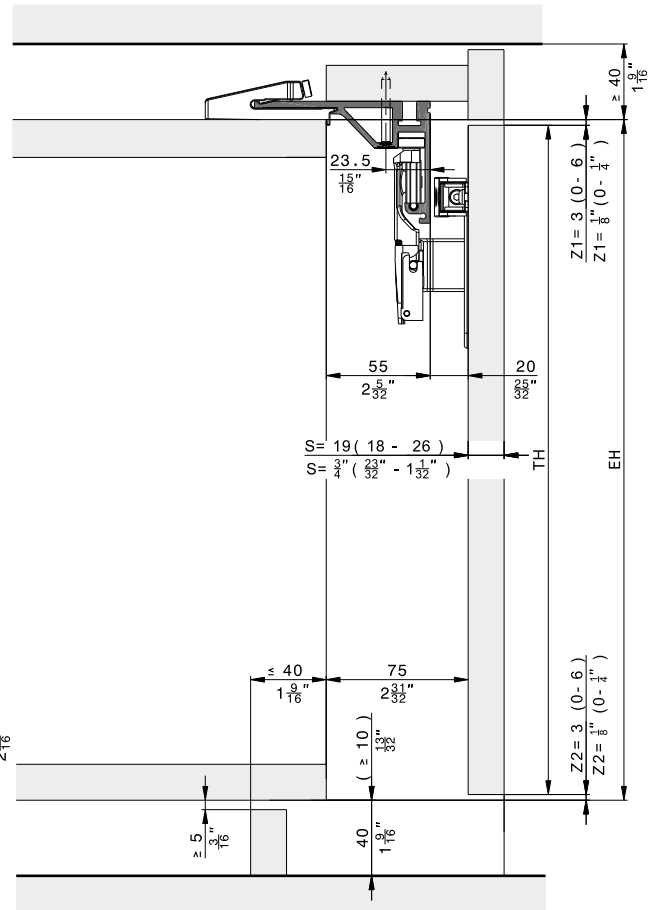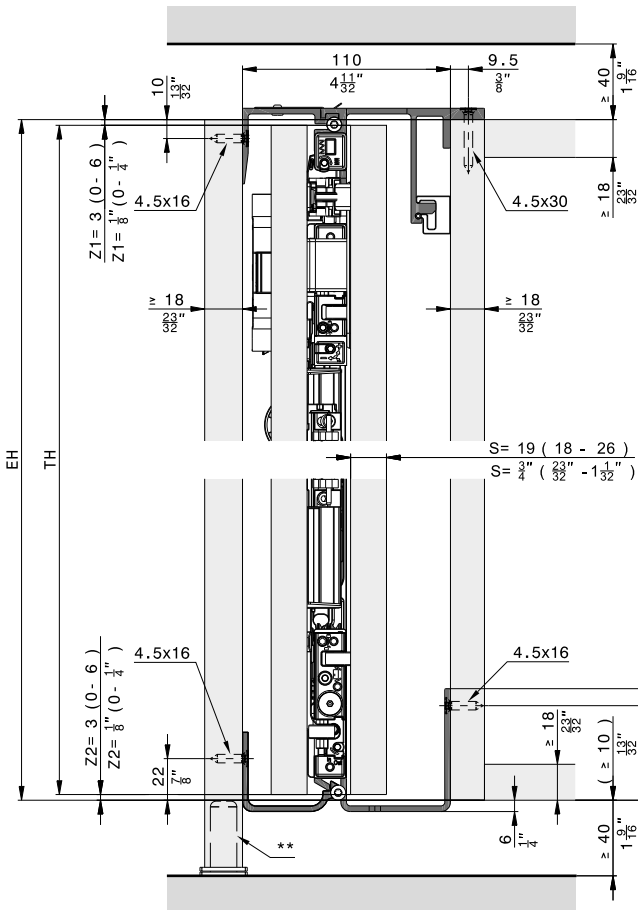Overlay door without base profile




** Recommendation: Use adjustable foot

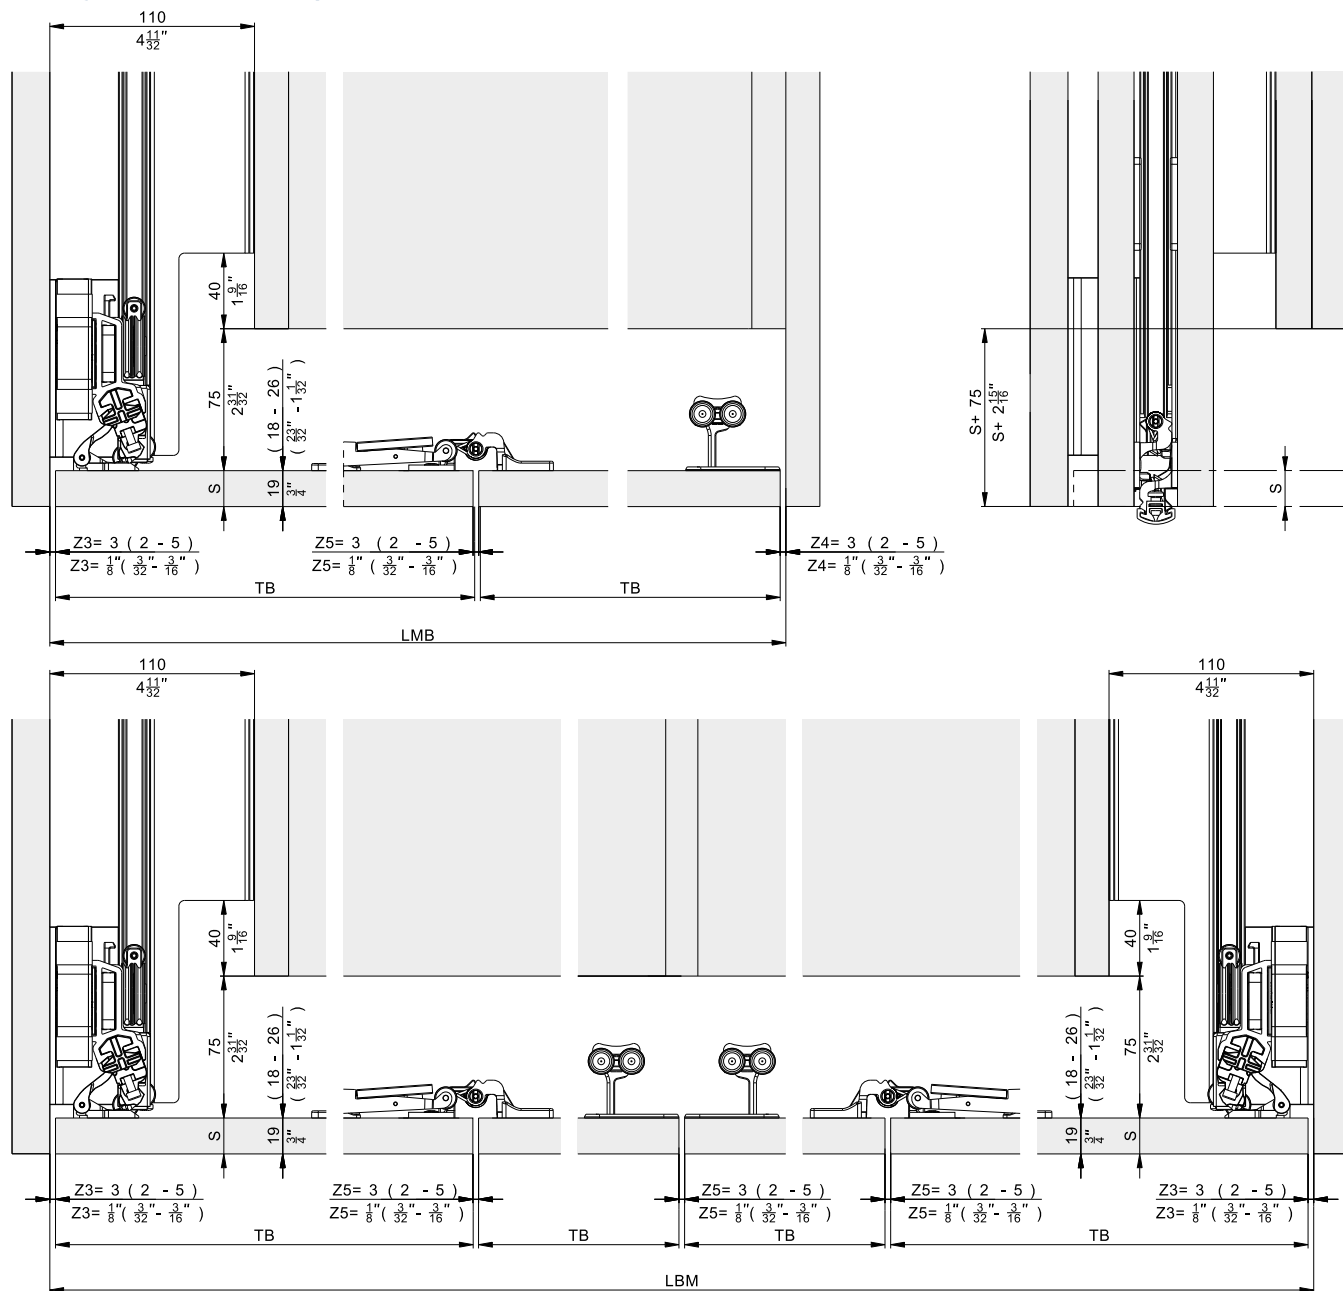Overlay door without base profile, 2 and 4 doors



Required components

for 2-door cabinets




Hawa Folding Concepta III 25 Push, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527



Hawa Folding Concepta III 25 Push, right


Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

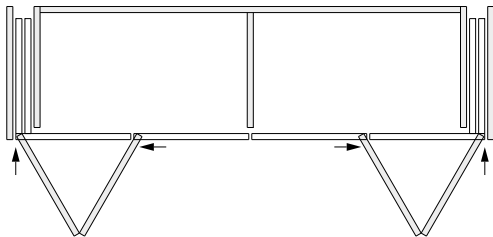for 4-door cabinets




Hawa Folding Concepta III 25 Push, left/right

Aluminum, anodized

	Pcs.	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	2	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	1	31510
Hawa Folding Concepta III 25 Push, slide-in set, right	1	31511
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	2	31520

Aluminum, black anodized


	Pcs.	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	2	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	1	31510
Hawa Folding Concepta III 25 Push, slide-in set, right	1	31511
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	2	31527

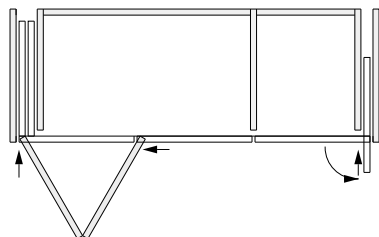for 3-door cabinets

**Hawa Folding Concepta III 25 Push, left with
Hawa Concepta III 35 Push, right**
Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005

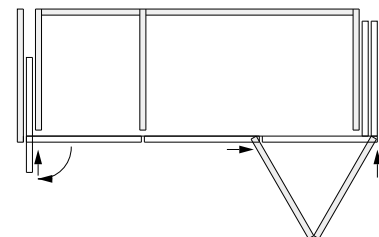Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005


**Hawa Folding Concepta III 25 Push, right with
Hawa Concepta III 35 Push, left**
Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005





Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005



Hawa Configurator
www.hawa.com/configurator →

List of individual parts, which are included in the sets

Set for 1 folding/slide-in door up to 25 kg (55 lbs.)

		No.	
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6'2 13/16" to 8'10 5/16")		31505	
		31505	No.
Set consisting of:			
	Slot nuts for hinge attachment, plastic, black	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, without soft closing mechanism and closing spring, steel, nickel plated	4	31435
	Center concealed hinge, spring loaded, steel, matt nickel-plated	4	30794
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 26 pieces	1	31533
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Screw set for Push-to-open and folding door soft closing mechanism	1	31531
	Folding door soft closing mechanism	1	31064
	Push-to-open for folding door	1	31332
	Counterplate for Push-to-open folding door, plastic, black	1	31036
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
	Screw set for double running track and Connector attachment at the bottom	1	31530




Suitable slide-in set

		No.	
Hawa Folding Concepta III 25 Push, slide-in set, left		31510	
Hawa Folding Concepta III 25 Push, slide-in set, right		31511	
		31510	No.
Set consisting of:			
	Slide-in unit Hawa Folding Concepta III 25 Push, left	1	31002
	End stop bracket for Push ejector, steel, zinc-plated	1	52560
	Push ejector, plastic, black	1	52454
	Slide-in securing mechanism, plastic, black	1	30966
	Adhesive plate for Push-to-open folding door, with double-sided adhesive tape, silver-gray and black	1	52118
	Slide-in unit Hawa Folding Concepta III 25 Push, right	1	31003

Suitable 2-door and 4-door track sets, aluminum, anodized



	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting of:

	31514	31515	31518	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
 Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
 Running track curve, left, aluminum, anodized	1		1	31365
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
 Track support and Connector part for running track curve	1	1	2	31543
 Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
 Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
 Running track curve, right, aluminum, anodized		1	1	31366
 Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
 Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
 Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")			1	31343

Upright set, aluminum, anodized







	No.
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520

	31520	No.
 Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
 Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2700 mm (8' 10 5/16")	1	31232
 Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503

Suitable 3-door track sets, aluminum, anodized



	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

Set consisting of:

	31516	31517	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, anodized, L= 1954 mm (6' 4 15/16")	1	1	31341
 Running track curve, left, aluminum, anodized	1		31365
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31340







Continued table on next column

Table continued from previous column

	Running track curve, right, aluminum, anodized	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")	1	31371






Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

Set consisting of:				No.
	31521	31522	31525	
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
 Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
 Running track curve, left, aluminum, black anodized	1		1	31367
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
 Track support and Connector part for running track curve	1	1	2	31543
 Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
 Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

 Cover-up pen for cut edge, black	1	1	1	52117
 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
 Running track curve, right, aluminum, black anodized		1	1	31368
 Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
 Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
 Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344

Upright set, aluminum, black anodized







	No.
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

Set consisting of:				No.
	31527			
 Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1			30771
 Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized, L= 2700 mm (8' 10 5/16")	1			31233
 Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1			31503

Suitable 3-door track sets, aluminum, black anodized





	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524

Set consisting of:


	31523	31524	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
 Running track curve, left, aluminum, black anodized	1		31367
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Cover-up pen for cut edge, black	1	1	52117

Continued table on next column




Table continued from previous column

 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31340
 Running track curve, right, aluminum, black anodized	1	31368
 Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
 Connector, top right, L= 788 mm (2' 7 1/32")	1	31371


Reinforcement profiles

	No.
 Reinforcement profile for running track front, 2765 mm (9' 27/32"), 4 doors, aluminum, anodized	52109
 Reinforcement profile for running track front, 2085 mm (6' 10 3/32"), 3 doors, aluminum, anodized	52110

Base profiles

	No.
 Base profile set, 2 doors, aluminum, anodized	52089
 Base profile set, 3 doors, aluminum, anodized	52090
 Base profile set, 4 doors, aluminum, anodized	52091
 Base profile set, 2 doors, aluminum, black anodized	52092
 Base profile set, 3 doors, aluminum, black anodized	52093
 Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

	No.
 Routing jig for folding hinge	52121
 Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Straightening fitting

→ Details under Accessories from page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8"), aluminum, set of 2 pieces	056.3192.072
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16"), aluminum, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.079

Aluminum, anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16"–9' 4 7/32"), aluminum, anodized, set of 2 pieces	056.3192.071
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8"), aluminum, anodized, set of 2 pieces	056.3192.082

Aluminum, black anodized


		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16"–9' 4 7/32"), aluminum, black anodized, incl. cover caps, set of 2 pieces	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8"), aluminum, black anodized, set of 2 pieces	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16"), aluminum, black anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.081

Automatic shut-off device


In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the Hawa-specific SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.

www.halemeier.de

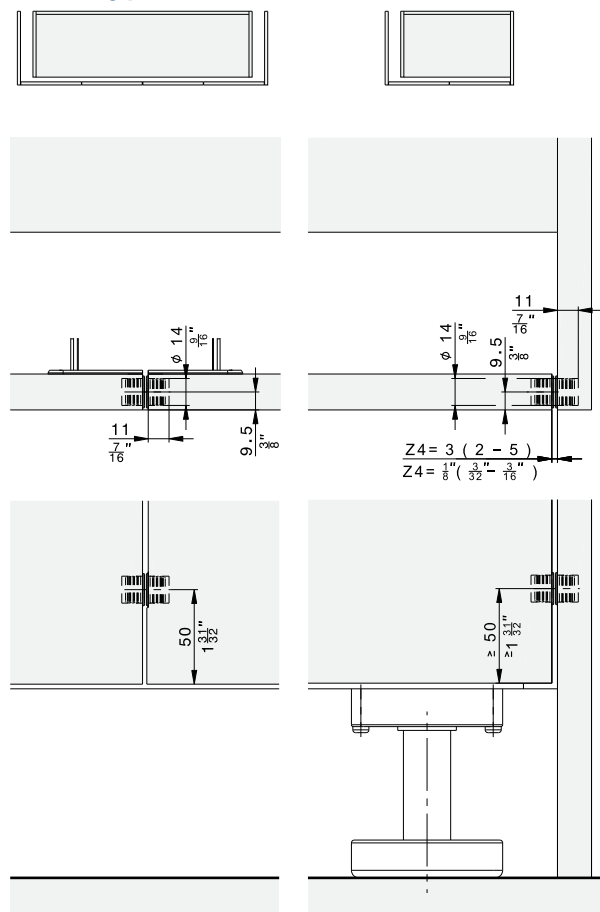Centering parts



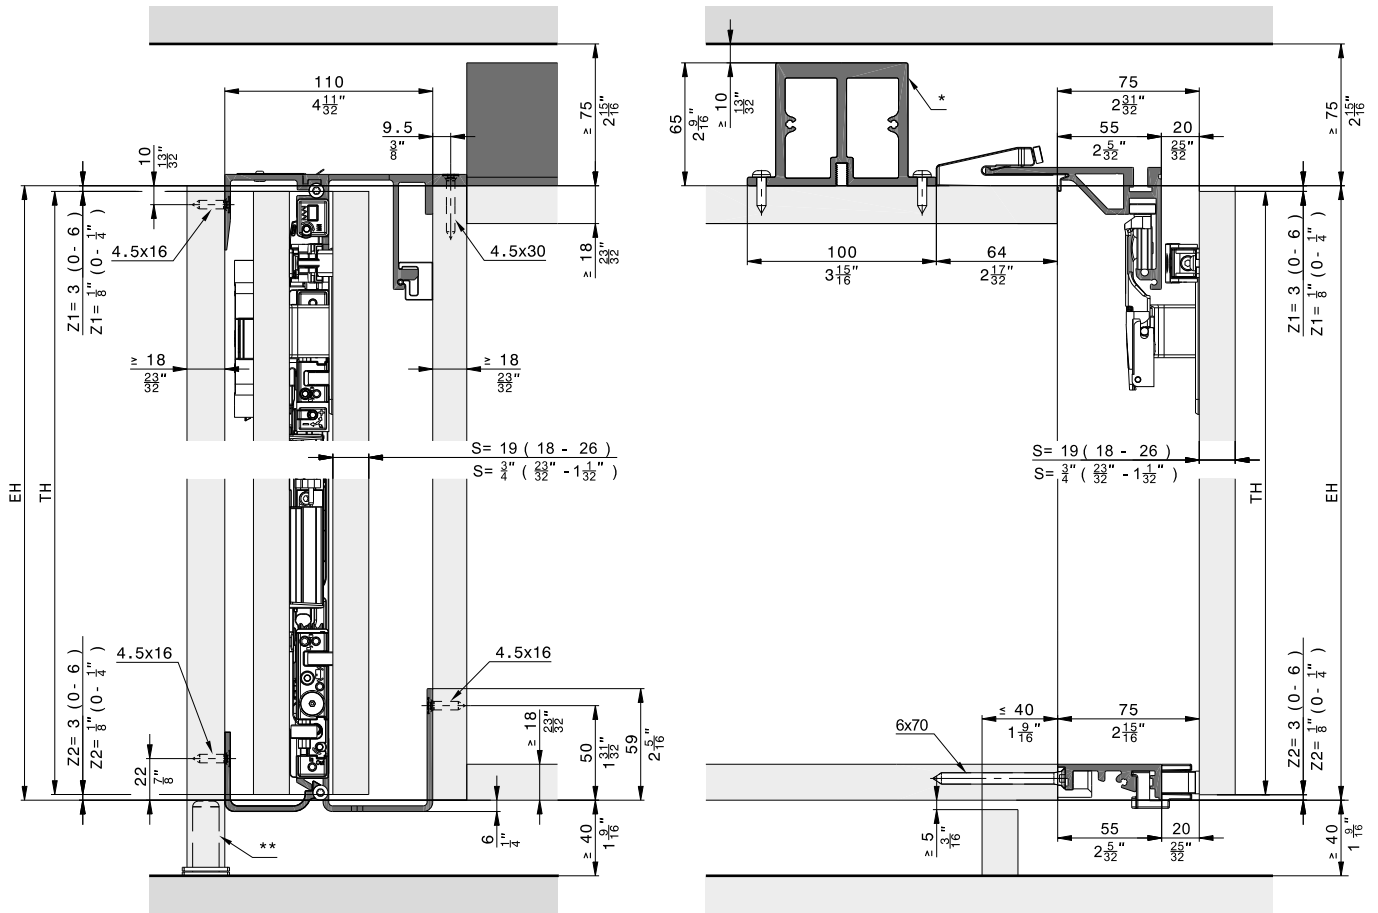
Overlay door with base profile, 2 and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls

**** Recommendation: Use adjustable foot**

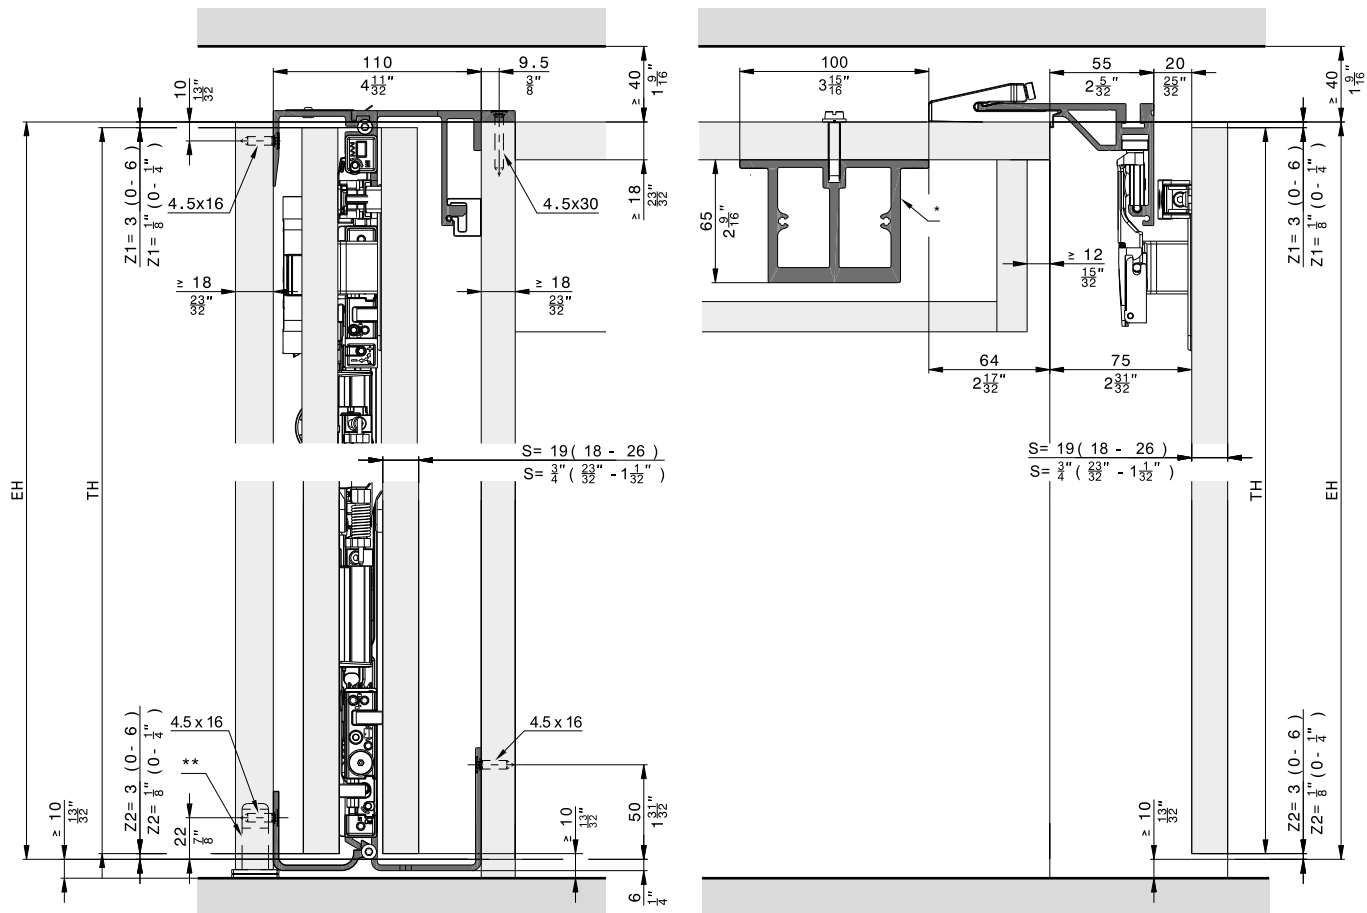
Floor-to-ceiling doors without base panels, 2 doors and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls


**** Recommendation: Use adjustable foot**

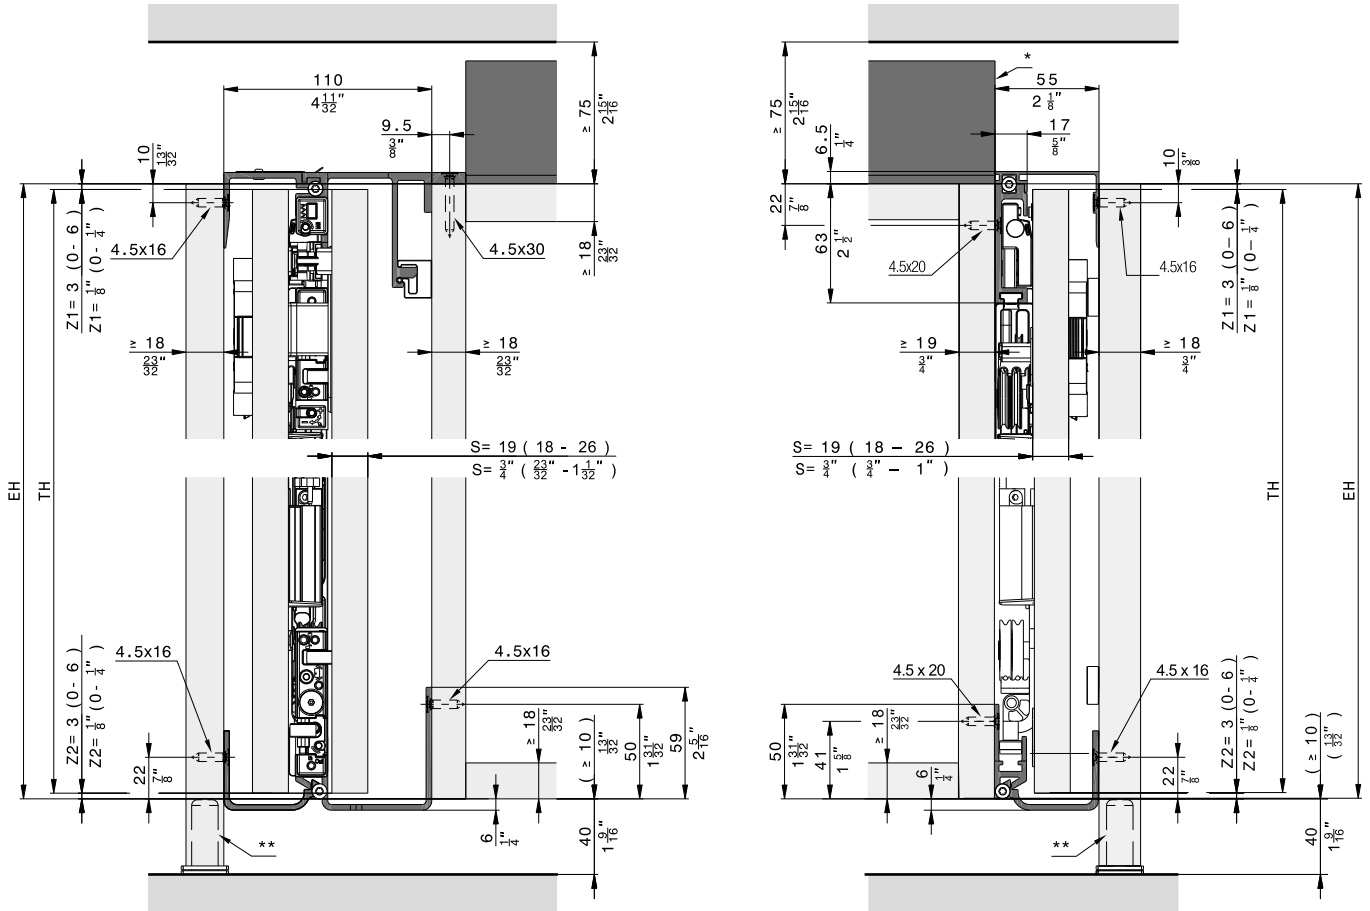Overlay door without base profile, 3 doors






* Reinforcement profile for 3-door and 4-door systems without separating walls

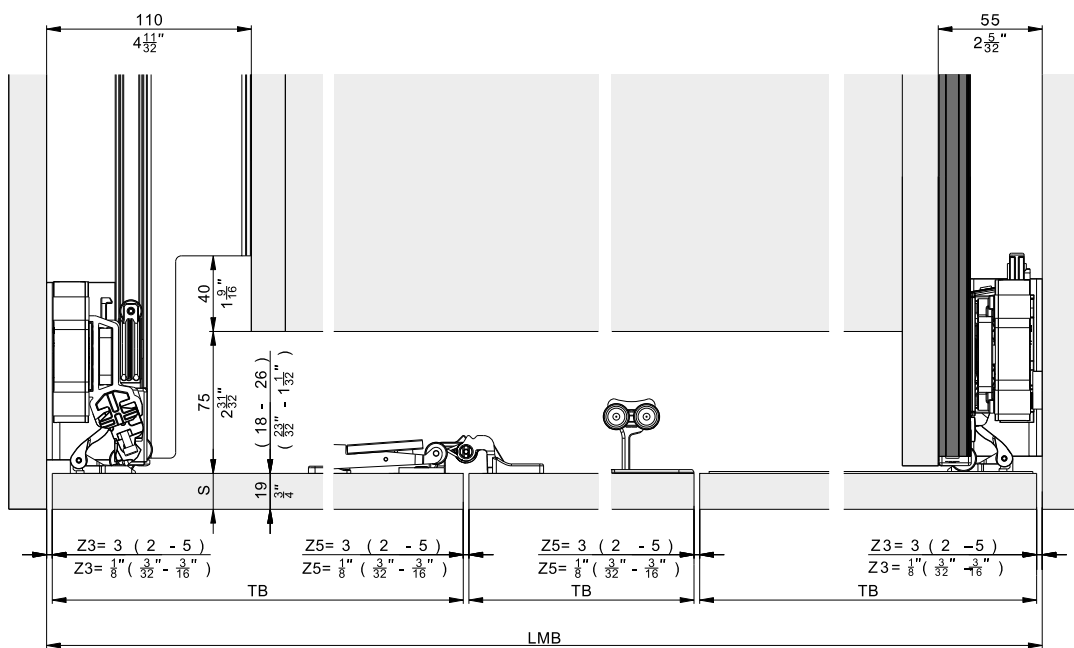** Recommendation: Use adjustable foot




Composed cabinet

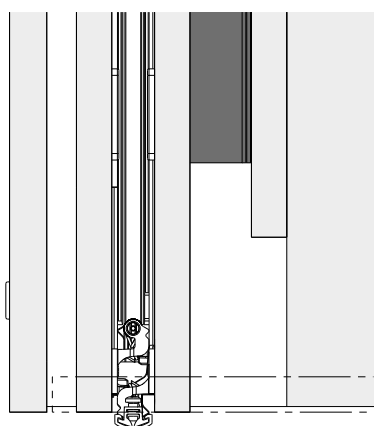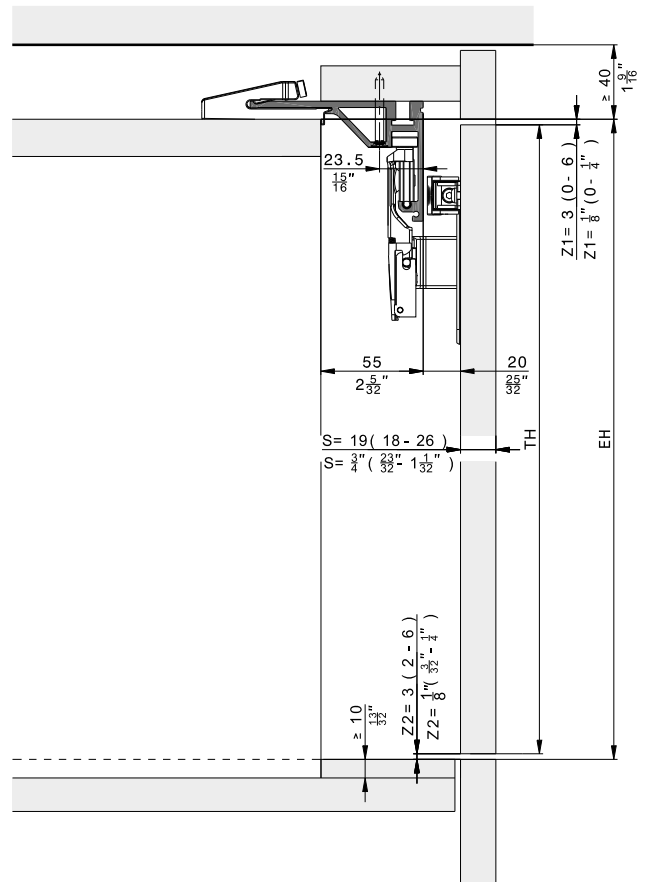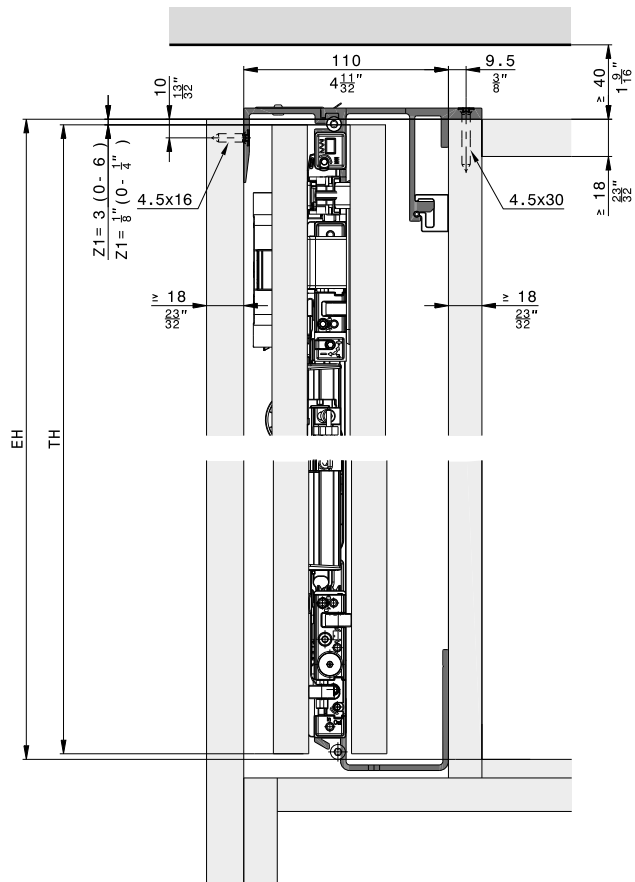


Hardware depth calculation


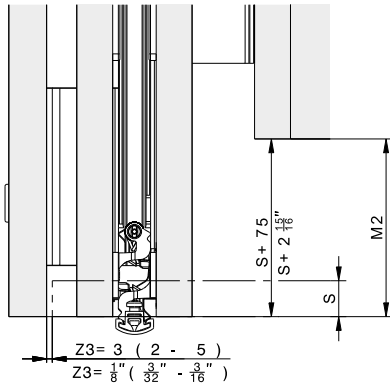
Flush door



Protruding door

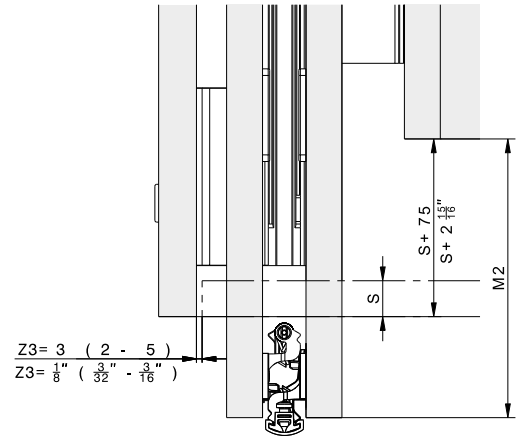

	mm	Inch
T2	TB + 92 + Z3 - M2	TB + 3 5/8" + Z3 - M2
KT2	≥ T2	≥ T2
E2	TB - M2	TB - M2
M2 min.	≥ S + 75	≥ S + 2 15/16"
M2 max.	≤ TB - 250	≤ TB - 9 27/32"

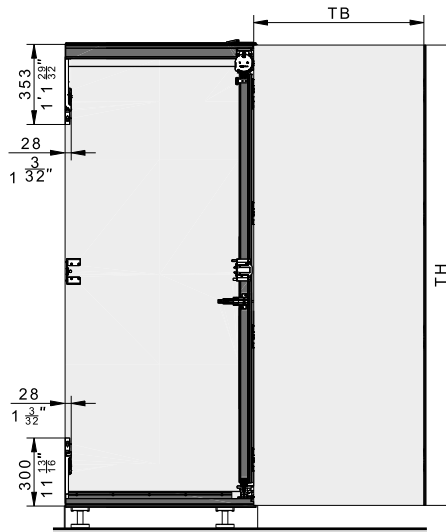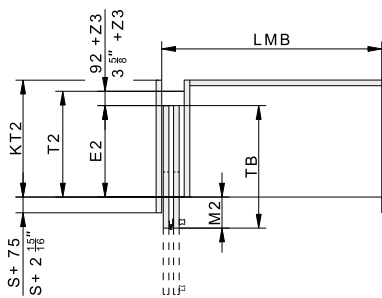

- S = Door thickness
- Z = Gap size
- E2 = Slide-in depth
- T2 = Hardware depth
- TB = Door width
- TH = Door height
- KT2 = Cabinet depth
- LMB = Inside clearance
- M2 = Door projection over cabinet

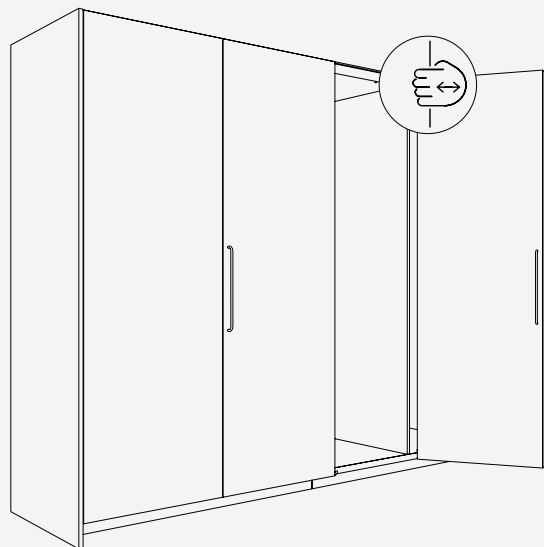
Hardware for pivoting, folding and lateral sliding in of wooden doors up to 25 kg (55 lbs). Uniform, flush front design with even gap pattern. Invisible technology. Pull version with handle.

Product highlights

- Flexibility** Variable door dimensions, also for floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III
- Productivity** Easy installation thanks to high degree of pre-assembly and intuitive adjustment
- Comfort** Opening and closing with very little effort – one hand is enough


Technical specifications

- 10–25 kg (22 to 55 lbs.)
- 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
- 440–750 mm (1' 5 5/16" to 2' 5 17/32")
- 18–26 mm (23/32" to 1 1/32")




Installation examples

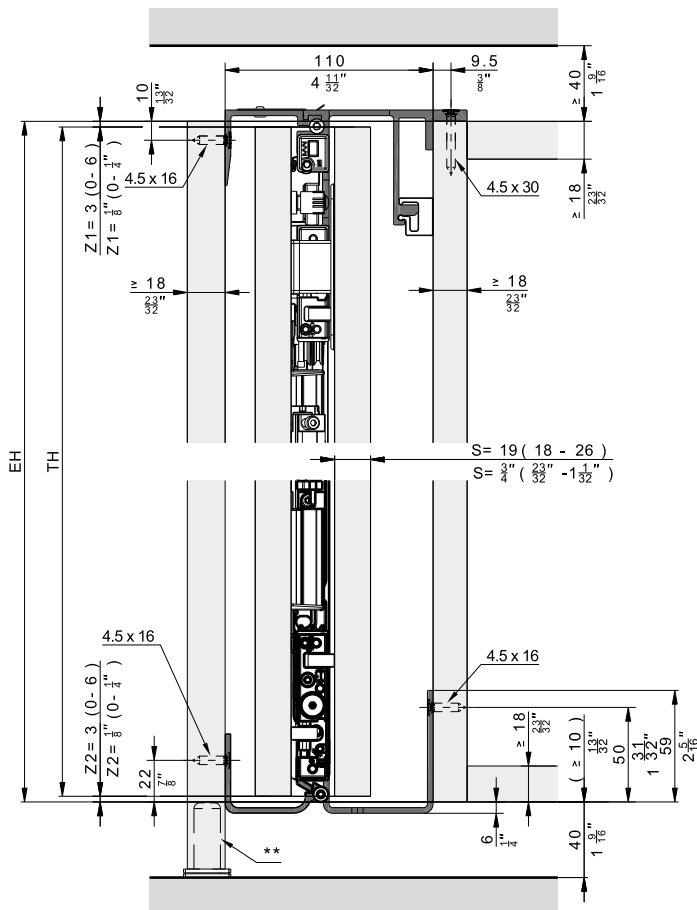
Overlay door without base profile



** Recommendation: Use adjustable foot

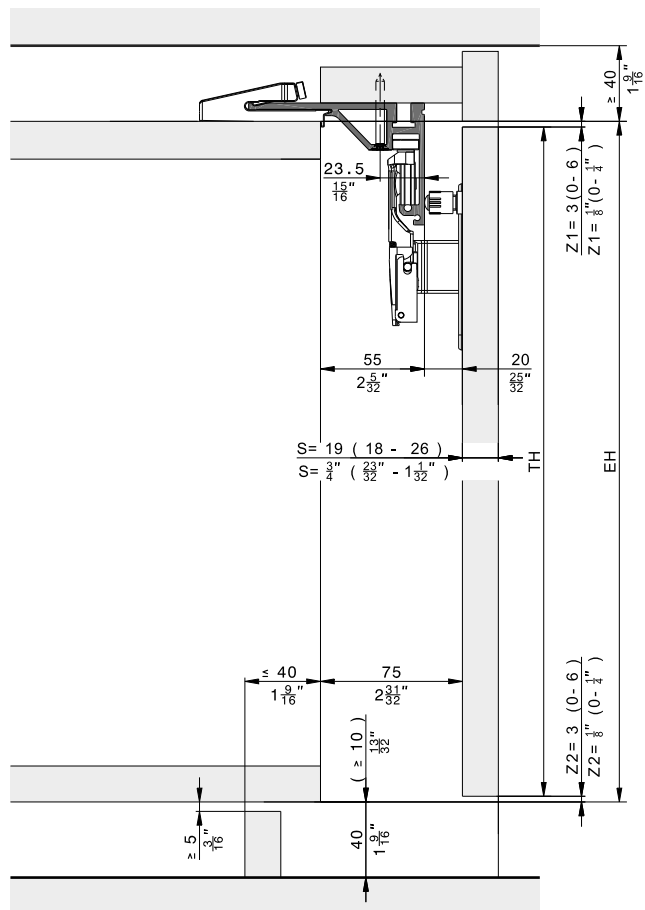


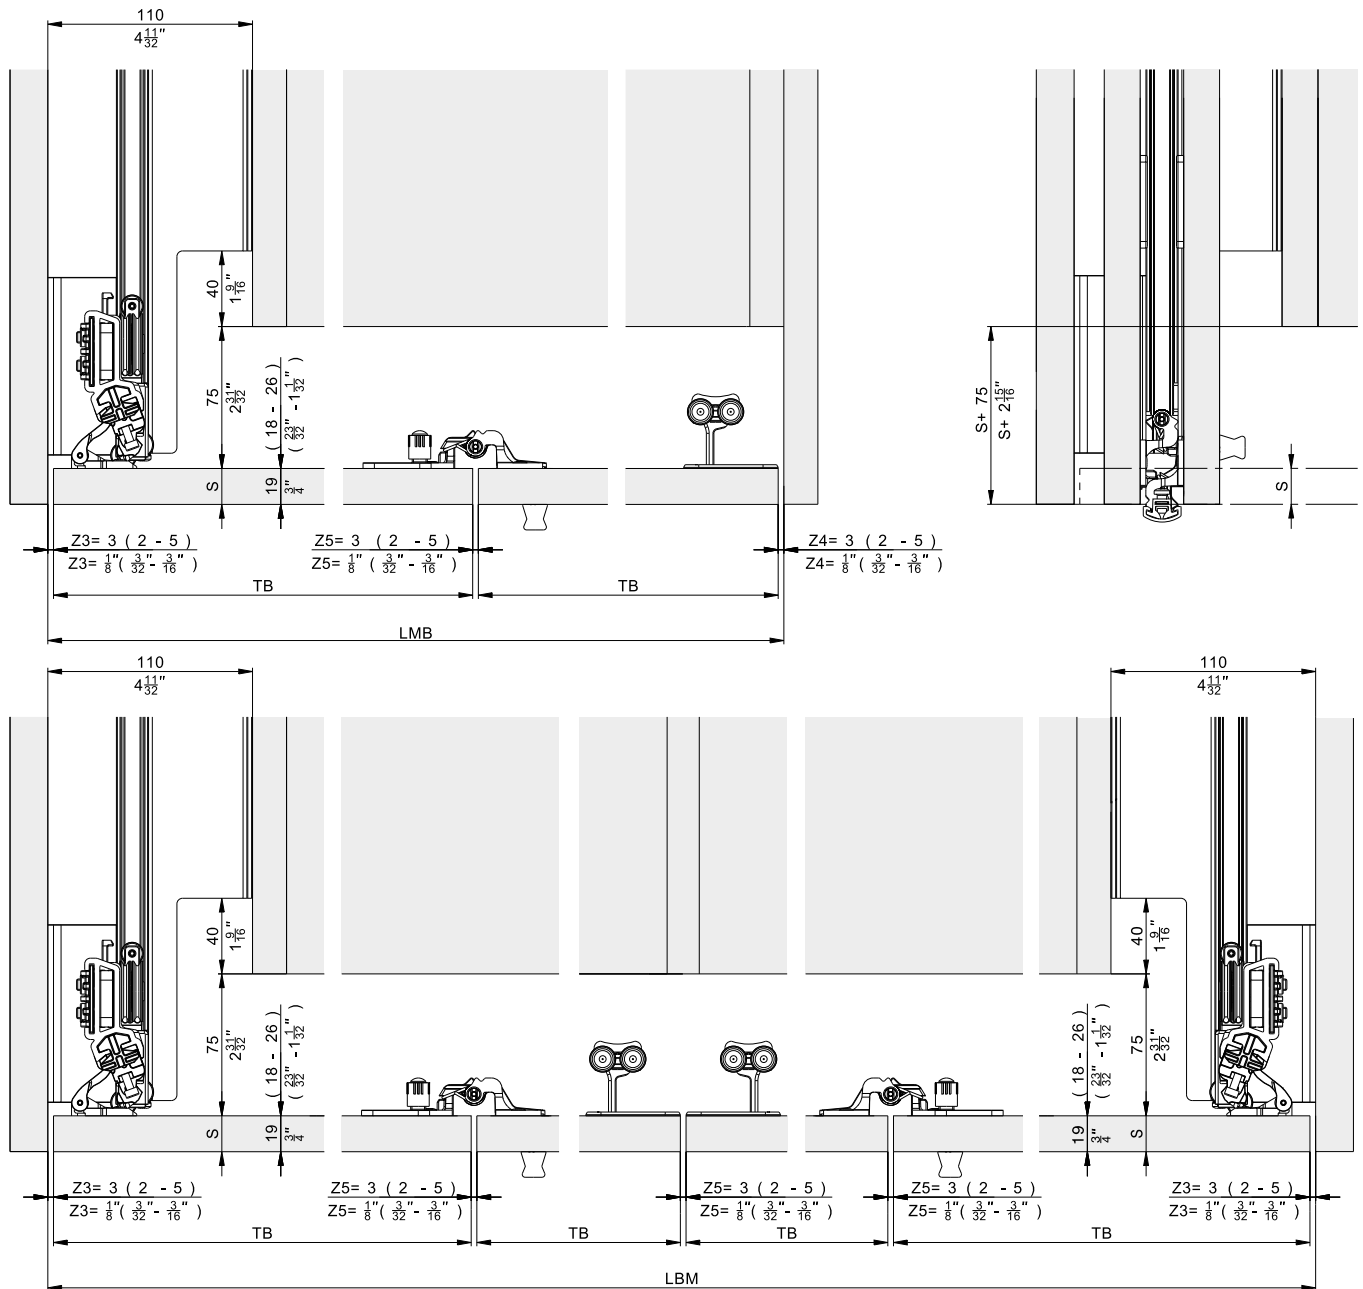Overlay door without base profile, 2 and 4 doors



Required components

for 2-door cabinets




Hawa Folding Concepta III 25 Pull, left
Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527




Hawa Folding Concepta III 25 Pull, right
Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

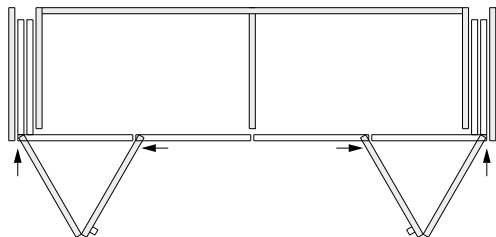for 4-door cabinets




Hawa Folding Concepta III 25 Pull, left/right
Aluminum, anodized

	Pcs.	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	2	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	2	31520

Aluminum, black anodized


	Pcs.	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	2	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	2	31527

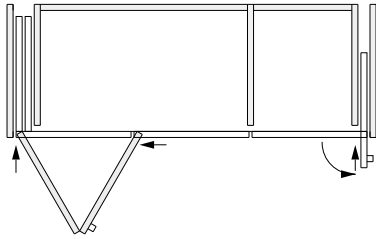for 3-door cabinets

**Hawa Folding Concepta III 25 Pull, left with
Hawa Concepta III 35 Pull, right**
Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005

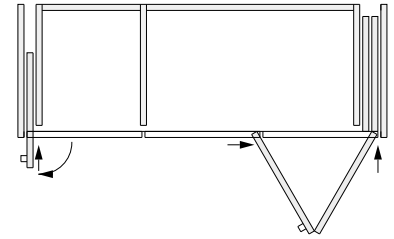Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005


**Hawa Folding Concepta III 25 Pull, right with
Hawa Concepta III 35 Pull, left**
Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005


Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005




Hawa Configurator
www.hawa.com/configurator


List of individual parts, which are included in the sets

Set for 1 folding/slide-in door up to 25 kg (55 lbs.)

			No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")			31507
			No.
Set consisting of:			
	Slot nuts for hinge attachment, plastic, black	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	31070
	Center concealed hinge, not spring loaded, steel, matt nickel-plated	4	31362
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 26 pieces	1	31533
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Soft closing mechanism	1	31222
	Stop buffer adjustable, plastic, anthracite	1	31550
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
	Screw set for double running track and Connector attachment at the bottom	1	31530

Suitable slide-in set

			No.
Hawa Folding Concepta III 20/25 Pull, slide-in set, left			31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right			31513
			No.
Set consisting of:			
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, left	1	31004
	Pull end stop bracket, steel, zinc-plated	1	31541
	Slide-in securing mechanism, plastic, black	1	30966
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, right	1	31046

Suitable 2-door and 4-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting of:

		31514	31515	31518	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, anodized		1	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right, L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")			1	31343







Upright set, aluminum, anodized

	No.
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520

		31520	No.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
	Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2700 mm (8' 10 5/16")	1	31232
	Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503


Suitable 3-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

		31516	31517	No.
Set consisting of:				
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
	Running track front, aluminum, anodized, L= 1954 mm (6' 4 15/16")	1	1	31341
	Running track curve, left, aluminum, anodized	1		31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31340

Continued table on next column






Table continued from previous column

	Running track curve, right, aluminum, anodized	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
	Connector, top right, L= 788 mm (2' 7 1/32")	1	31371

Suitable 2-door and 4-door track sets, aluminum, black anodized






	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

Set consisting of:

	31521	31522	31525	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
 Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
 Running track curve, left, aluminum, black anodized	1		1	31367
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
 Track support and Connector part for running track curve	1	1	2	31543
 Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
 Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Cover-up pen for cut edge, black	1	1	1	52117
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, black anodized		1	1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right, L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344

Upright set, aluminum, black anodized







	No.
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

	31527	No.
 Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
 Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized, L= 2700 mm (8' 10 5/16")	1	31233
 Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503

Suitable 3-door track sets, aluminum, black anodized





	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524

Set consisting of:


	31523	31524	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
 Running track curve, left, aluminum, black anodized	1		31367
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Cover-up pen for cut edge, black	1	1	52117

Continued table on next column


Table continued from previous column

 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31340
 Running track curve, right, aluminum, black anodized	1	31368
 Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
 Connector, top right, L= 788 mm (2' 7 1/32")	1	31371


Reinforcement profiles

	No.
 Reinforcement profile for running track front, 2765 mm (9' 27/32"), 4 doors, aluminum, anodized	52109
 Reinforcement profile for running track front, 2085 mm (6' 10 3/32"), 3 doors, aluminum, anodized	52110

Base profiles

	No.
 Base profile set, 2 doors, aluminum, anodized	52089
Base profile set, 3 doors, aluminum, anodized	52090
Base profile set, 4 doors, aluminum, anodized	52091
Base profile set, 2 doors, aluminum, black anodized	52092
Base profile set, 3 doors, aluminum, black anodized	52093
Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

	No.
 Routing jig for folding hinge	52121
 Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Straightening fitting

→ Details under Accessories from page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8"), aluminum, set of 2 pieces	056.3192.072
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16"), aluminum, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.079

Aluminum, anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16"–9' 4 7/32"), aluminum, anodized, set of 2 pieces	056.3192.071
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8"), aluminum, anodized, set of 2 pieces	056.3192.082


Aluminum, black anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16"–9' 4 7/32"), aluminum, black anodized, incl. cover caps, set of 2 pieces	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16"–8' 6 3/8"), aluminum, black anodized, set of 2 pieces	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32"–7' 5 9/16"), aluminum, black anodized, can be shortened for doors smaller than 1715 mm (5' 7 17/32"), set of 2 pieces	056.3192.081

Automatic shut-off device


In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the Hawa-specific SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

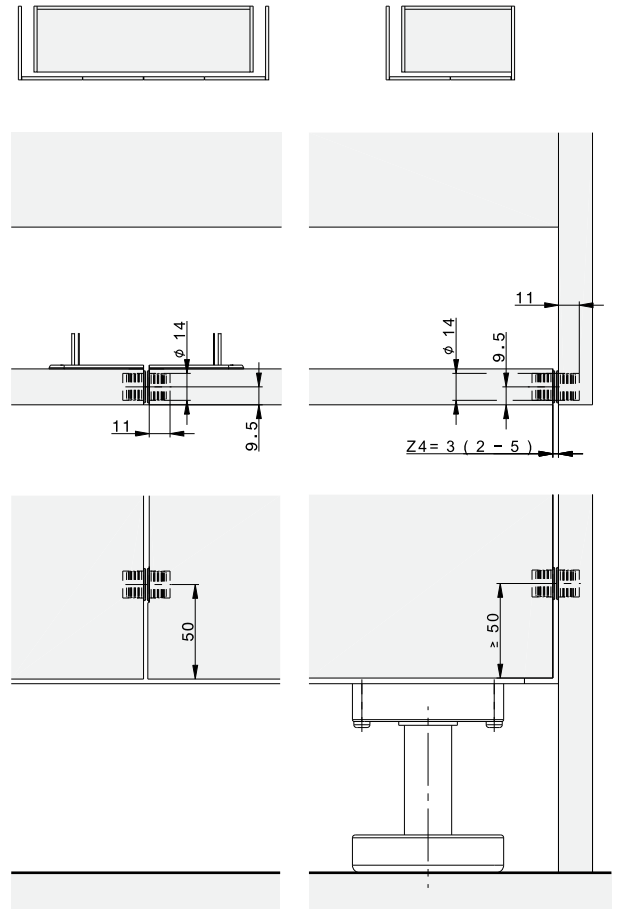Centering parts



Further installation examples


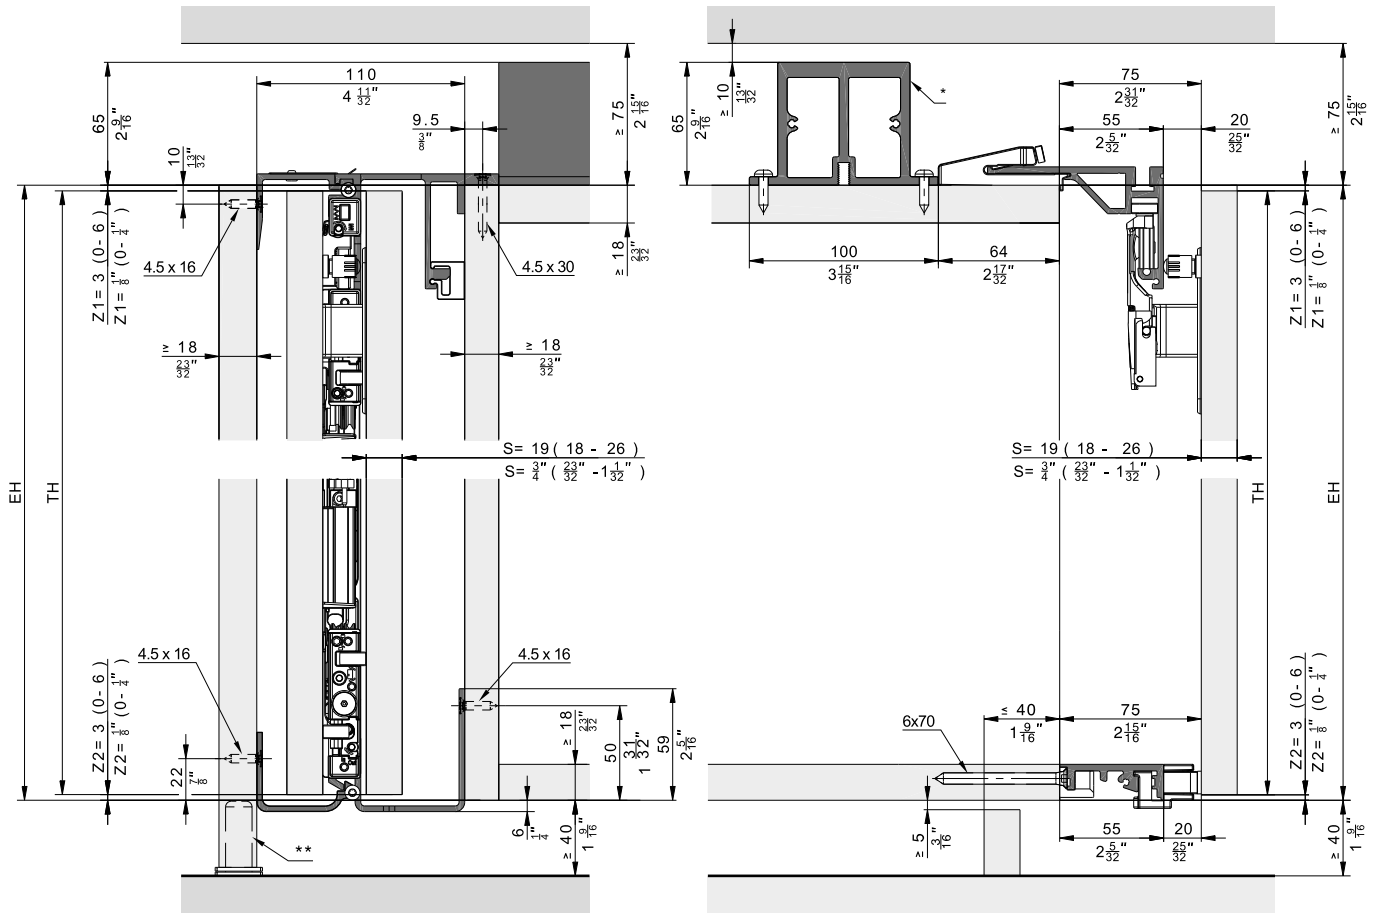
Overlay door with base profile, 2 and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls

** Recommendation: Use adjustable foot

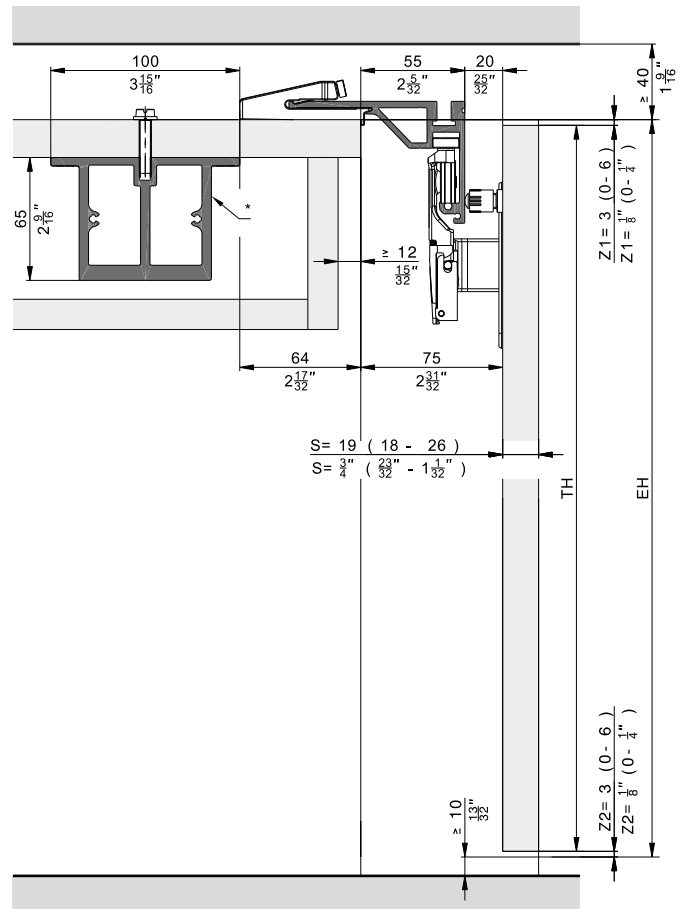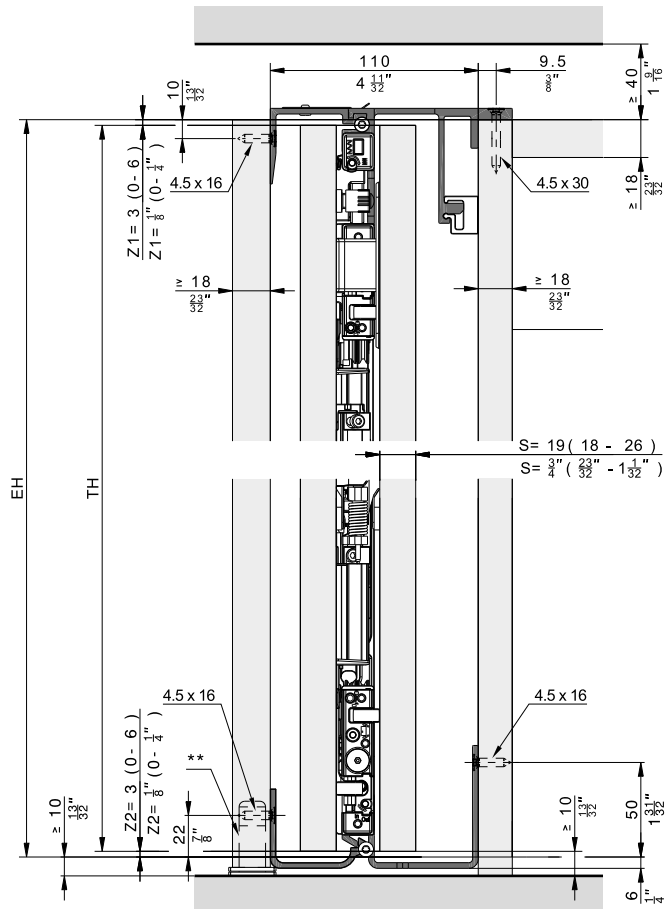
Floor-to-ceiling doors without base panels, 2 doors and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls


** Recommendation: Use adjustable foot

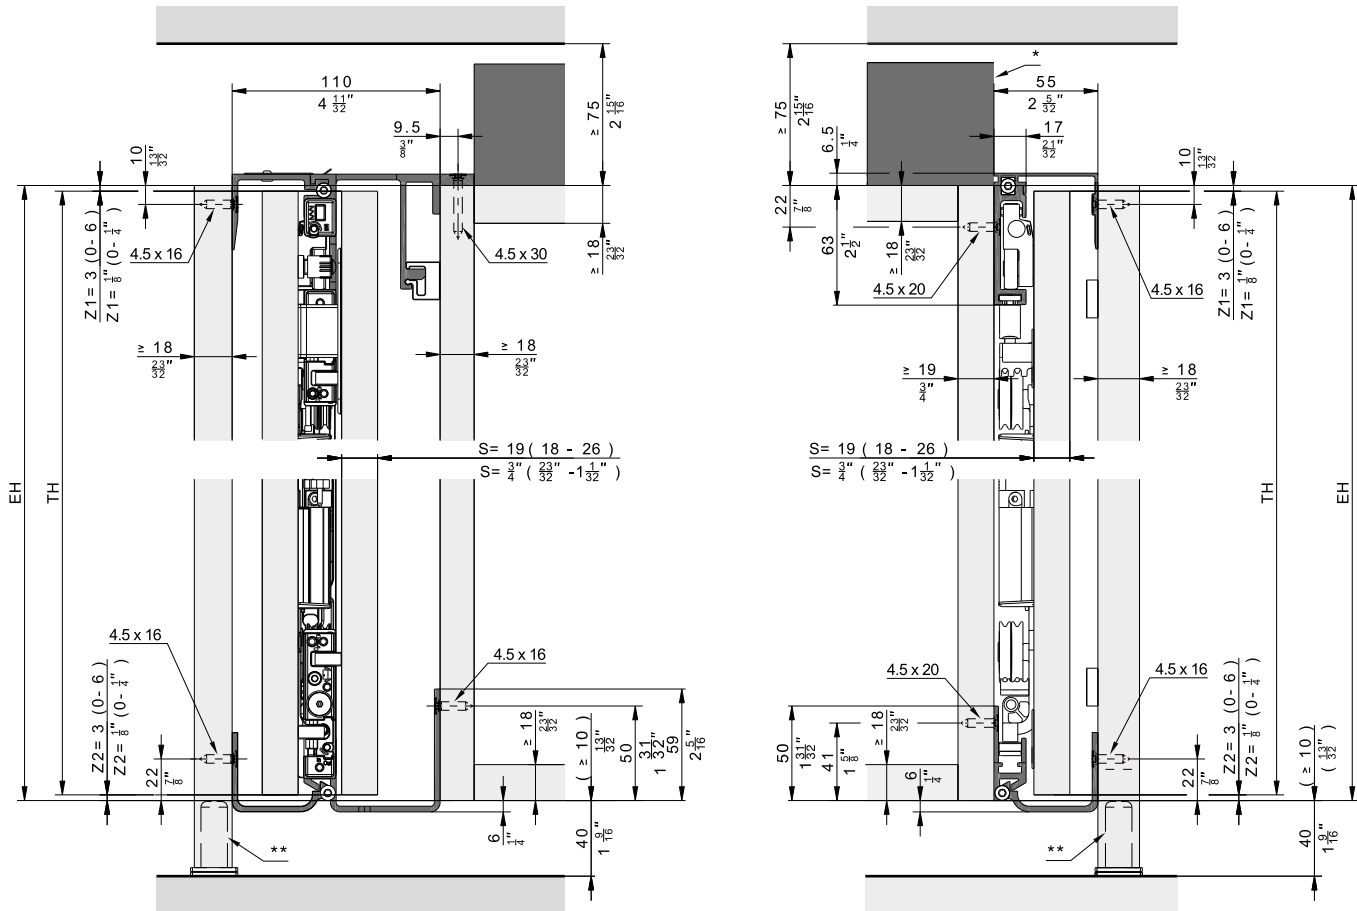Overlay door without base profile, 3 doors




* Reinforcement profile for 3-door and 4-door systems without separating walls

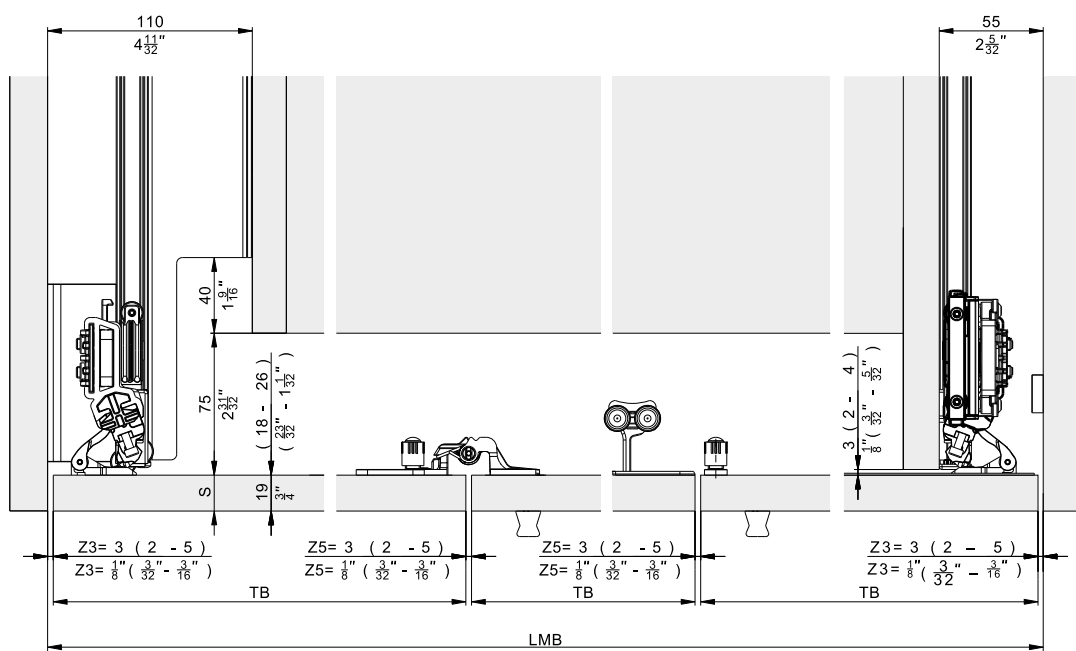** Recommendation: Use adjustable foot




Hardware depth calculation


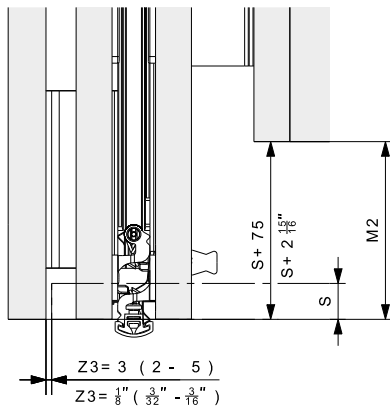
Flush door



	mm	Inch
T2	TB + 92 + Z3 - M2	TB + 3 ⁵ / ₈ \" + Z3 - M2
KT2	≥ T2	≥ T2
E2	TB - M2	TB - M2
M2 min.	≥ S + 75	≥ S + 2 ¹⁵ / ₁₆ \"
M2 max.	≤ TB - 250	≤ TB - 9 ²⁷ / ₃₂ \"

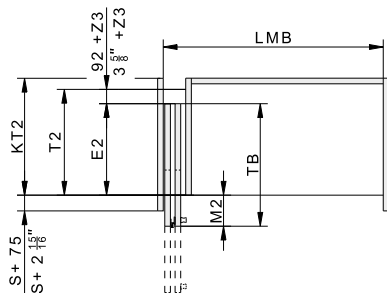

Protruding door

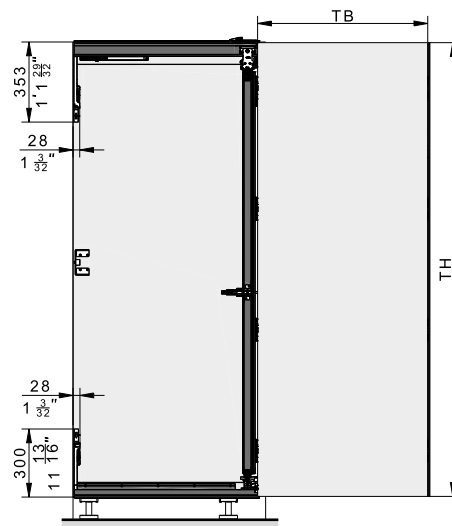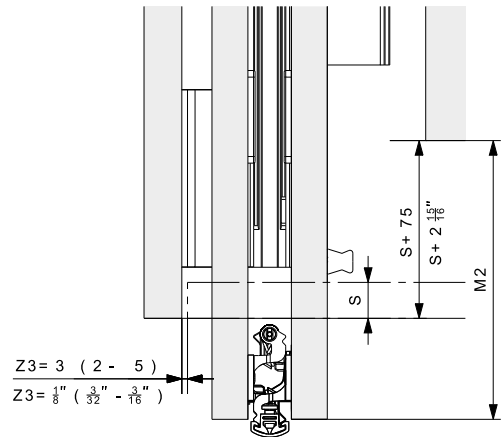

- S = Door thickness
- Z = Gap size
- E2 = Slide-in depth
- T2 = Hardware depth
- TB = Door width
- TH = Door height
- KT2 = Cabinet depth
- LMB = Inside clearance
- M2 = Door projection over cabinet

Visit us online

You will find more inspiration for our latest generation of pivot and folding/slide-in hardware at **hawa.com/concepta3-family**.

We would be pleased to advise you personally. Contact us at info@hawa.com or by phone on +41 44 787 17 17.